INCH-POUND
MIL-PRF-55629/9E
10 March 2010
SUPERSEDING
MIL-PRF-55629/9D
12 July 2005

PERFORMANCE SPECIFICATION SHEET

# CIRCUIT BREAKERS, MAGNETIC, LOW-POWER, UNSEALED, TRIP-FREE, SERIES TRIP, DOUBLE POLE (0.2 TO 30 AMPERES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-55629.

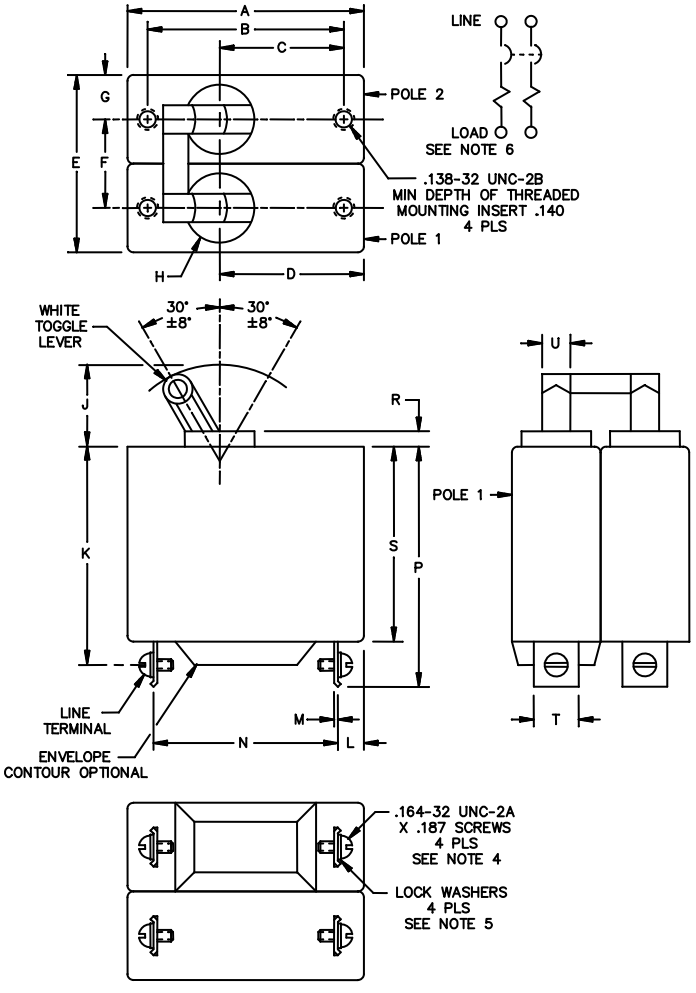



FIGURE 1. Dimensions and configurations (configuration 1).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

| Ltr | Inches | | mm | |
|---|---|---|---|---|
| | Min | Max | Min | Max |
| A | 1.969 | 2.031 | 50.01 | 51.56 |
| B | 1.629 | 1.691 | 41.38 | 42.95 |
| C | 1.019 | 1.081 | 25.88 | 27.46 |
| D | 1.189 | 1.251 | 30.20 | 31.78 |
| E | 1.469 | 1.531 | 37.31 | 38.89 |
| F | .719 | .781 | 18.26 | 19.84 |
| G | .365 | .385 | 9.27 | 9.78 |
| H | .559 DIA | .621 DIA | 14.20 DIA | 15.77 DIA |
| J | .658 | .722 | 16.71 | 18.34 |
| K | --- | 1.850 | --- | 46.99 |
| L | .189 | .251 | 4.80 | 6.38 |
| M | .030 | .035 | 0.76 | 0.89 |
| N | 1.529 | 1.591 | 38.84 | 40.41 |
| P | --- | 2.032 | --- | 51.61 |
| R | .099 | .161 | 2.51 | 4.09 |
| S | --- | 1.650 | --- | 41.91 |
| T | .349 | .411 | 8.86 | 10.44 |
| U | .209 | .271 | 5.31 | 6.88 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.031 (0.79 mm).
4. Terminal screw, No. 8, .164-32UNC-2A, .187 ±.015 long, Material: Brass, tin plated (ASTM-B545 or equivalent).
5. Lockwasher - split, No. 8 NASM35338-137 or equivalent.
6. Physical item marking of the load terminal is optional.

FIGURE 1. Dimensions and configurations (configuration 1) – Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

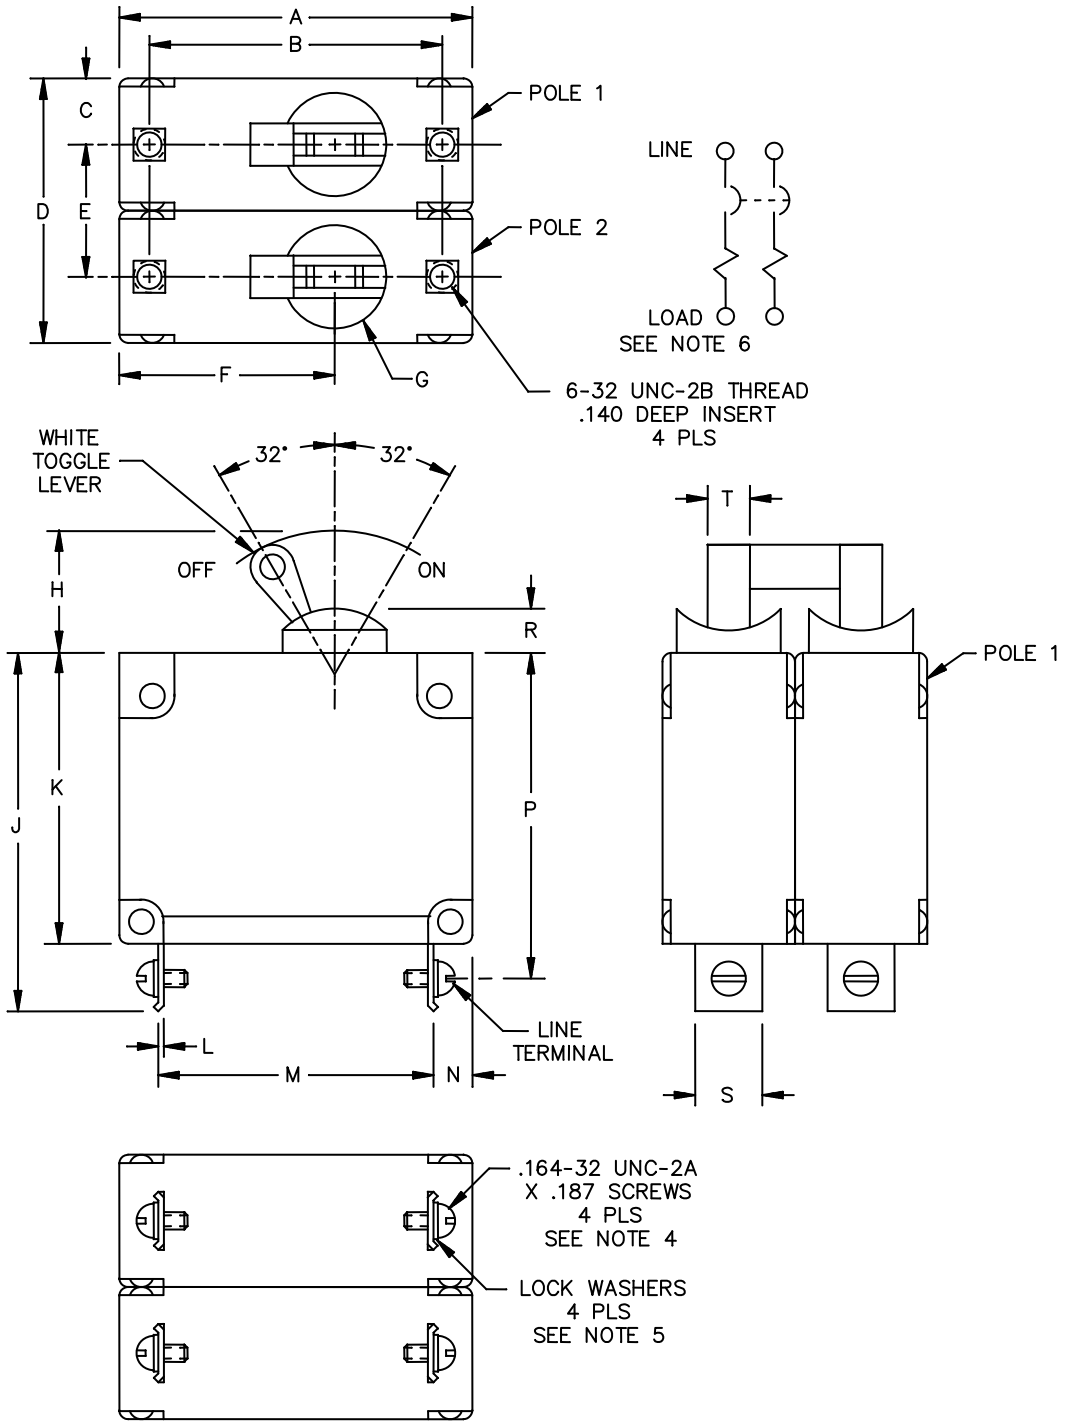



FIGURE 2. Dimensions and configurations (configuration 2).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

| Ltr | Inches | | mm | |
|---|---|---|---|---|
| | Min | Max | Min | Max |
| A | 1.985 | 2.015 | 50.42 | 51.18 |
| B | 1.645 | 1.675 | 41.78 | 42.55 |
| C | .360 | .390 | 9.14 | 9.91 |
| D | --- | 1.515 | --- | 38.48 |
| E | .735 | .765 | 18.67 | 19.43 |
| F | 1.205 | 1.235 | 30.61 | 31.37 |
| G | --- | .590 | --- | 14.99 |
| H | .675 | .705 | 17.15 | 17.91 |
| J | --- | 2.075 | --- | 52.71 |
| K | 1.672 | 1.702 | 42.47 | 43.23 |
| L | .016 | .046 | 0.41 | 1.17 |
| M | 1.515 | 1.545 | 38.48 | 39.24 |
| N | .215 | .245 | 5.46 | 6.35 |
| P | --- | 1.920 | --- | 48.77 |
| R | .110 | .140 | 2.79 | 3.56 |
| S | .360 | .390 | 9.14 | 9.91 |
| T | .245 | .275 | 6.22 | 6.99 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ± .015 (0.38 mm).
4. Terminal screw, No. 8, .164-32UNC-2A, .187 ±.015 long, Material: Brass, tin plated (ASTM-B545 or equivalent).
5. Lockwasher: Split, No. 8 NASM35338-137 or equivalent.
6. Physical item marking of the load terminal is optional.
7. For configuration 2, a “G” has been added to the end of the dash number.

FIGURE 2. Dimensions and configurations (configuration 2) - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configuration: See figure 1 and figure 2.

Current ratings: See table I.

Voltage ratings: See table I. 240 V ac breakers are designed also for use at 120 V ac.

Tripping-time delays: See table I and table II.

Terminal and mounting hardware: See figure 1.

Terminals: See figure 1. Solderability is applicable. Solder terminals are formed by removal of screws.

Actuator strength: 25 pounds.

Actuator operating force: 4 pounds, maximum.

Terminal strength:

Applied load: 30 pounds.

Applied torque: 10 inch-pounds.

Interrupting capacities:

2,000 amperes at 50 V dc.

2,000 amperes at 120 V ac, 60 Hz.

1,500 amperes at 120 V ac, 400 Hz.

1,000 amperes at 240 V ac, 60 and 400 Hz.

Part or Identifying Number (PIN): M55629/9- (dash number from table I).



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics (configuration 1).

| Dash no. | Current rating (amperes) | Voltage rating | Tripping time delay | Resistance or impedance ohms (max.) |
|---|---|---|---|---|
| 001 | 0.2 | 50 V dc | A | 32 |
| 002 | 0.2 | 50 V dc | B | 32 |
| 003 | 0.2 | 24 0 V ac, 60 Hz | C | 34 |
| 004 | 0.2 | 240 V ac, 60 Hz | D | 34 |
| 005 | 0.2 | 240 V ac, 400 Hz | E | 72 |
| 006 | 0.2 | 240 V ac, 400 Hz | F | 72 |
| 007 | 0.2 | 240 V ac, 400 Hz | G | 72 |
| 008 | 0.5 | 50 V dc | A | 6 |
| 009 | 0.5 | 50 V dc | B | 6 |
| 010 | 0.5 | 240 V ac, 60 Hz | C | 6 |
| 011 | 0.5 | 240 V ac, 60 Hz | D | 6 |
| 012 | 0.5 | 240 V ac, 400 Hz | E | 12 |
| 013 | 0.5 | 240 V ac, 400 Hz | F | 12 |
| 014 | 0.5 | 240 V ac, 400 Hz | G | 12 |
| 015 | 1.0 | 50 V dc | A | 2 |
| 016 | 1.0 | 50 V dc | B | 2 |
| 017 | 1.0 | 240 V ac, 60 Hz | C | 2 |
| 018 | 1.0 | 240 V ac, 60 Hz | D | 2 |
| 019 | 1.0 | 240 V ac, 400 Hz | E | 4 |
| 020 | 1.0 | 240 V ac, 400 Hz | F | 4 |
| 021 | 1.0 | 240 V ac, 400 Hz | G | 4 |
| 022 | 2.0 | 50 V dc | A | .5 |
| 023 | 2.0 | 50 V dc | B | .5 |
| 024 | 2.0 | 240 V ac, 60 Hz | C | .5 |
| 025 | 2.0 | 240 V ac, 60 Hz | D | .5 |
| 026 | 2.0 | 240 V ac, 400 Hz | E | .8 |
| 027 | 2.0 | 240 V ac, 400 Hz | F | .8 |
| 028 | 2.0 | 240 V ac, 400 Hz | G | .8 |
| 029 | 3.0 | 50 V dc | A | .3 |
| 030 | 3.0 | 50 V dc | B | .3 |
| 031 | 3.0 | 240 V ac, 60 Hz | C | .3 |
| 032 | 3.0 | 240 V ac, 60 Hz | D | .3 |
| 033 | 3.0 | 240 V ac, 400 Hz | E | .5 |
| 034 | 3.0 | 240 V ac, 400 Hz | F | .5 |
| 035 | 3.0 | 240 V ac, 400 Hz | G | .5 |
| 036 | 4.0 | 50 V dc | A | .1 |
| 037 | 4.0 | 50 V dc | B | .1 |
| 038 | 4.0 | 240 V ac, 60 Hz | C | .1 |
| 039 | 4.0 | 240 V ac, 60 Hz | D | .1 |
| 040 | 4.0 | 240 V ac, 400 Hz | E | .3 |
| 041 | 4.0 | 240 V ac, 400 Hz | F | .3 |
| 042 | 4.0 | 240 V ac, 400 Hz | G | .3 |
| 043 | 5.0 | 50 V dc | A | .08 |
| 044 | 5.0 | 50 V dc | B | .08 |
| 045 | 5.0 | 240 V ac, 60 Hz | C | .08 |
| 046 | 5.0 | 240 V ac, 60 Hz | D | .08 |
| 047 | 5.0 | 240 V ac, 400 Hz | E | .15 |
| 048 | 5.0 | 240 V ac, 400 Hz | F | .15 |
| 049 | 5.0 | 240 V ac, 400 Hz | G | .15 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics (configuration 1) - Continued.

| Dash no. | Current rating (amperes) | Voltage rating | Tripping time delay | Resistance or impedance ohms (max.) |
|---|---|---|---|---|
| 050 | 6.0 | 50 V dc | A | .06 |
| 051 | 6.0 | 50 V dc | B | .06 |
| 052 | 6.0 | 240 V ac, 60 Hz | C | .06 |
| 053 | 6.0 | 240 V ac, 60 Hz | D | .06 |
| 054 | 6.0 | 240 V ac, 400 Hz | E | .08 |
| 055 | 6.0 | 240 V ac, 400 Hz | F | .08 |
| 056 | 6.0 | 240 V ac, 400 Hz | G | .08 |
| 057 | 7.0 | 50 V dc | A | .04 |
| 058 | 7.0 | 50 V dc | B | .04 |
| 059 | 7.0 | 240 V ac, 60 Hz | C | .04 |
| 060 | 7.0 | 240 V ac, 60 Hz | D | .04 |
| 061 | 7.0 | 240 V ac, 400 Hz | E | .07 |
| 062 | 7.0 | 240 V ac, 400 Hz | F | .07 |
| 063 | 7.0 | 240 V ac, 400 Hz | G | .07 |
| 064 | 8.0 | 50 V dc | A | .03 |
| 065 | 8.0 | 50 V dc | B | .03 |
| 066 | 8.0 | 240 V ac, 60 Hz | C | .03 |
| 067 | 8.0 | 240 V ac, 60 Hz | D | .03 |
| 068 | 8.0 | 240 V ac, 400 Hz | E | .06 |
| 069 | 8.0 | 240 V ac, 400 Hz | F | .06 |
| 070 | 8.0 | 240 V ac, 400 Hz | G | .06 |
| 071 | 9.0 | 50 V dc | A | .018 |
| 072 | 9.0 | 50 V dc | B | .018 |
| 073 | 9.0 | 240 V ac, 60 Hz | C | .02 |
| 074 | 9.0 | 240 V ac, 60 Hz | D | .02 |
| 075 | 9.0 | 240 V ac, 400 Hz | E | .05 |
| 076 | 9.0 | 240 V ac, 400 Hz | F | .05 |
| 077 | 9.0 | 240 V ac, 400 Hz | G | .05 |
| 078 | 10.0 | 50 V dc | A | .02 |
| 079 | 10.0 | 50 V dc | B | .02 |
| 080 | 10.0 | 240 V ac, 60 Hz | C | .02 |
| 081 | 10.0 | 240 V ac, 60 Hz | D | .02 |
| 082 | 10.0 | 240 V ac, 400 Hz | E | .04 |
| 083 | 10.0 | 240 V ac, 400 Hz | F | .04 |
| 084 | 10.0 | 240 V ac, 400 Hz | G | .04 |
| 085 | 12.5 | 50 V dc | A | .013 |
| 086 | 12.5 | 50 V dc | B | .013 |
| 087 | 12.5 | 240 V ac, 60 Hz | C | .015 |
| 088 | 12.5 | 240 V ac, 60 Hz | D | .015 |
| 089 | 12.5 | 240 V ac, 400 Hz | E | .03 |
| 090 | 12.5 | 240 V ac, 400 Hz | F | .03 |
| 091 | 12.5 | 240 V ac, 400 Hz | G | .03 |
| 092 | 15.0 | 50 V dc | A | .01 |
| 093 | 15.0 | 50 V dc | B | .01 |
| 094 | 15.0 | 240 V ac, 60 Hz | C | .011 |
| 095 | 15.0 | 240 V ac, 60 Hz | D | .011 |
| 096 | 15.0 | 240 V ac, 400 Hz | E | .02 |
| 097 | 15.0 | 240 V ac, 400 Hz | F | .02 |
| 098 | 15.0 | 240 V ac, 400 Hz | G | .02 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE I. Circuit breaker dash numbers and applicable characteristics (configuration 1) - Continued.

| Dash no. | Current rating (amperes) | Voltage rating | Tripping time delay | Resistance or impedance ohms (max.) |
|---|---|---|---|---|
| 099 | 20.0 | 50 V dc | A | .007 |
| 100 | 20.0 | 50 V dc | B | .007 |
| 101 | 20.0 | 240 V ac, 60 Hz | C | .007 |
| 102 | 20.0 | 240 V ac, 60 Hz | D | .007 |
| 103 | 20.0 | 240 V ac, 400 Hz | E | .01 |
| 104 | 20.0 | 240 V ac, 400 Hz | F | .01 |
| 105 | 20.0 | 240 V ac, 400 Hz | G | .01 |
| 106 | 25.0 | 50 V dc | A | .006 |
| 107 | 25.0 | 50 V dc | B | .006 |
| 108 | 25.0 | 240 V ac, 60 Hz | C | .006 |
| 109 | 25.0 | 240 V ac, 60 Hz | D | .006 |
| 110 | 25.0 | 240 V ac, 400 Hz | E | .007 |
| 111 | 25.0 | 240 V ac, 400 Hz | F | .007 |
| 112 | 25.0 | 240 V ac, 400 Hz | G | .007 |
| 113 | 30.0 | 50 V dc | A | .005 |
| 114 | 30.0 | 50 V dc | B | .005 |
| 115 | 30.0 | 240 V ac, 60 Hz | C | .005 |
| 116 | 30.0 | 240 V ac, 60 Hz | D | .005 |
| 117 | 30.0 | 240 V ac, 400 Hz | E | .006 |
| 118 | 30.0 | 240 V ac, 400 Hz | F | .006 |
| 119 | 30.0 | 240 V ac, 400 Hz | G | .006 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE II. Circuit breaker dash numbers and applicable characteristics (configuration 2).

| Dash no. | Current rating (amperes) | Voltage rating | Tripping time delay | Resistance or impedance ohms (max.) |
|---|---|---|---|---|
| 001G | 0.2 | 50 V dc | A | 48 |
| 002G | 0.2 | 50 V dc | B | 48 |
| 003G | 0.2 | 240 V ac, 60 Hz | C | 42 |
| 004G | 0.2 | 240 V ac, 60 Hz | D | 42 |
| 005G | 0.2 | 240 V ac, 400 Hz | E | 88 |
| 006G | 0.2 | 240 V ac, 400 Hz | F | 88 |
| 007G | 0.2 | 240 V ac, 400 Hz | G | 88 |
| 008G | 0.5 | 50 V dc | A | 6 |
| 009G | 0.5 | 50 V dc | B | 6 |
| 010G | 0.5 | 240 V ac, 60 Hz | C | 6 |
| 011G | 0.5 | 240 V ac, 60 Hz | D | 6 |
| 012G | 0.5 | 240 V ac, 400 Hz | E | 13 |
| 013G | 0.5 | 240 V ac, 400 Hz | F | 13 |
| 014G | 0.5 | 240 V ac, 400 Hz | G | 13 |
| 015G | 1.0 | 50 V dc | A | 2 |
| 016G | 1.0 | 50 V dc | B | 2 |
| 017G | 1.0 | 240 V ac, 60 Hz | C | 2 |
| 018G | 1.0 | 240 V ac, 60 Hz | D | 2 |
| 019G | 1.0 | 240 V ac, 400 Hz | E | 4 |
| 020G | 1.0 | 240 V ac, 400 Hz | F | 4 |
| 021G | 1.0 | 240 V ac, 400 Hz | G | 4 |
| 022G | 2.0 | 50 V dc | A | 0.5 |
| 023G | 2.0 | 50 V dc | B | 0.5 |
| 024G | 2.0 | 240 V ac, 60 Hz | C | 0.5 |
| 025G | 2.0 | 240 V ac, 60 Hz | D | 0.5 |
| 026G | 2.0 | 240 V ac, 400 Hz | E | 0.8 |
| 027G | 2.0 | 240 V ac, 400 Hz | F | 0.8 |
| 028G | 2.0 | 240 V ac, 400 Hz | G | 0.8 |
| 029G | 3.0 | 50 V dc | A | 0.3 |
| 030G | 3.0 | 50 V dc | B | 0.3 |
| 031G | 3.0 | 240 V ac, 60 Hz | C | 0.3 |
| 032G | 3.0 | 240 V ac, 60 Hz | D | 0.3 |
| 033G | 3.0 | 240 V ac, 400 Hz | E | 0.5 |
| 034G | 3.0 | 240 V ac, 400 Hz | F | 0.5 |
| 035G | 3.0 | 240 V ac, 400 Hz | G | 0.5 |
| 036G | 4.0 | 50 V dc | A | 0.1 |
| 037G | 4.0 | 50 V dc | B | 0.1 |
| 038G | 4.0 | 240 V ac, 60 Hz | C | 0.1 |
| 039G | 4.0 | 240 V ac, 60 Hz | D | 0.1 |
| 040G | 4.0 | 240 V ac, 400 Hz | E | 0.3 |
| 041G | 4.0 | 240 V ac, 400 Hz | F | 0.3 |
| 042G | 4.0 | 240 V ac, 400 Hz | G | 0.3 |
| 043G | 5.0 | 50 V dc | A | 0.08 |
| 044G | 5.0 | 50 V dc | B | 0.08 |
| 045G | 5.0 | 240 V ac, 60 Hz | C | 0.08 |
| 046G | 5.0 | 240 V ac, 60 Hz | D | 0.08 |
| 047G | 5.0 | 240 V ac, 400 Hz | E | 0.15 |
| 048G | 5.0 | 240 V ac, 400 Hz | F | 0.15 |
| 049G | 5.0 | 240 V ac, 400 Hz | G | 0.15 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE II. Circuit breaker dash numbers and applicable characteristics (configuration 2) - Continued.

| Dash no. | Current rating (amperes) | Voltage rating | Tripping time delay | Resistance or impedance ohms (max.) |
|---|---|---|---|---|
| 050G | 6.0 | 50 V dc | A | 0.06 |
| 051G | 6.0 | 50 V dc | B | 0.06 |
| 052G | 6.0 | 240 V ac, 60 Hz | C | 0.06 |
| 053G | 6.0 | 240 V ac, 60 Hz | D | 0.06 |
| 054G | 6.0 | 240 V ac, 400 Hz | E | 0.09 |
| 055G | 6.0 | 240 V ac, 400 Hz | F | 0.09 |
| 056G | 6.0 | 240 V ac, 400 Hz | G | 0.09 |
| 057G | 7.0 | 50 V dc | A | 0.04 |
| 058G | 7.0 | 50 V dc | B | 0.04 |
| 059G | 7.0 | 240 V ac, 60 Hz | C | 0.04 |
| 060G | 7.0 | 240 V ac, 60 Hz | D | 0.04 |
| 061G | 7.0 | 240 V ac, 400 Hz | E | 0.07 |
| 062G | 7.0 | 240 V ac, 400 Hz | F | 0.07 |
| 063G | 7.0 | 240 V ac, 400 Hz | G | 0.07 |
| 064G | 8.0 | 50 V dc | A | 0.03 |
| 065G | 8.0 | 50 V dc | B | 0.03 |
| 066G | 8.0 | 240 V ac, 60 Hz | C | 0.03 |
| 067G | 8.0 | 240 V ac, 60 Hz | D | 0.03 |
| 068G | 8.0 | 240 V ac, 400 Hz | E | 0.06 |
| 069G | 8.0 | 240 V ac, 400 Hz | F | 0.06 |
| 070G | 8.0 | 240 V ac, 400 Hz | G | 0.06 |
| 071G | 9.0 | 50 V dc | A | 0.025 |
| 072G | 9.0 | 50 V dc | B | 0.025 |
| 073G | 9.0 | 240 V ac, 60 Hz | C | 0.02 |
| 074G | 9.0 | 240 V ac, 60 Hz | D | 0.02 |
| 075G | 9.0 | 240 V ac, 400 Hz | E | 0.05 |
| 076G | 9.0 | 240 V ac, 400 Hz | F | 0.05 |
| 077G | 9.0 | 240 V ac, 400 Hz | G | 0.05 |
| 078G | 10.0 | 50 V dc | A | 0.02 |
| 079G | 10.0 | 50 V dc | B | 0.02 |
| 080G | 10.0 | 240 V ac, 60 Hz | C | 0.02 |
| 081G | 10.0 | 240 V ac, 60 Hz | D | 0.02 |
| 082G | 10.0 | 240 V ac, 400 Hz | E | 0.04 |
| 083G | 10.0 | 240 V ac, 400 Hz | F | 0.04 |
| 084G | 10.0 | 240 V ac, 400 Hz | G | 0.04 |
| 085G | 12.5 | 50 V dc | A | 0.013 |
| 086G | 12.5 | 50 V dc | B | 0.013 |
| 087G | 12.5 | 240 V ac, 60 Hz | C | 0.015 |
| 088G | 12.5 | 240 V ac, 60 Hz | D | 0.015 |
| 089G | 12.5 | 240 V ac, 400 Hz | E | 0.03 |
| 090G | 12.5 | 240 V ac, 400 Hz | F | 0.03 |
| 091G | 12.5 | 240 V ac, 400 Hz | G | 0.03 |
| 092G | 15.0 | 50 V dc | A | 0.01 |
| 093G | 15.0 | 50 V dc | B | 0.01 |
| 094G | 15.0 | 240 V ac, 60 Hz | C | 0.011 |
| 095G | 15.0 | 240 V ac, 60 Hz | D | 0.011 |
| 096G | 15.0 | 240 V ac, 400 Hz | E | 0.02 |
| 097G | 15.0 | 240 V ac, 400 Hz | F | 0.02 |
| 098G | 15.0 | 240 V ac, 400 Hz | G | 0.02 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE II. Circuit breaker dash numbers and applicable characteristics (configuration 2) - Continued.

| Dash no. | Current rating (amperes) | Voltage rating | Tripping time delay | Resistance or impedance ohms (max.) |
|---|---|---|---|---|
| 099G | 20.0 | 50 V dc | A | 0.008 |
| 100G | 20.0 | 50 V dc | B | 0.008 |
| 101G | 20.0 | 240 V ac, 60 Hz | C | 0.007 |
| 102G | 20.0 | 240 V ac, 60 Hz | D | 0.007 |
| 103G | 20.0 | 240 V ac, 400 Hz | E | 0.01 |
| 104G | 20.0 | 240 V ac, 400 Hz | F | 0.01 |
| 105G | 20.0 | 240 V ac, 400 Hz | G | 0.01 |
| 106G | 25.0 | 50 V dc | A | 0.006 |
| 107G | 25.0 | 50 V dc | B | 0.006 |
| 108G | 25.0 | 240 V ac, 60 Hz | C | 0.006 |
| 109G | 25.0 | 240 V ac, 60 Hz | D | 0.006 |
| 110G | 25.0 | 240 V ac, 400 Hz | E | 0.007 |
| 111G | 25.0 | 240 V ac, 400 Hz | F | 0.007 |
| 112G | 25.0 | 240 V ac, 400 Hz | G | 0.007 |
| 113G | 30.0 | 50 V dc | A | 0.005 |
| 114G | 30.0 | 50 V dc | B | 0.005 |
| 115G | 30.0 | 240 V ac, 60 Hz | C | 0.005 |
| 116G | 30.0 | 240 V ac, 60 Hz | D | 0.005 |
| 117G | 30.0 | 240 V ac, 400 Hz | E | 0.006 |
| 118G | 30.0 | 240 V ac, 400 Hz | F | 0.006 |
| 119G | 30.0 | 240 V ac, 400 Hz | G | 0.006 |



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE III. Tripping-time delay (configuration 1). 1/

| Time delay percent rated current | Tripping-time delay at 25°C ±2°C (tripping time in seconds) | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 50 V dc | | | | 240 V ac, 60 Hz | | | | 240 V ac, 400 Hz | | | | | |
| | A | | B | | C | | D | | E | | F | | G | |
| | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 70 | 7 | 7 | .5 | 120 | 10 | 17 | .7 | N/A | N/A | N/A | N/A | N/A | N/A |
| 150 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 60 | 5 | 5.8 | .50 | 400 | 40 |
| 200 | 8 | .6 | 1.4 | .13 | 20 | 2.2 | 1.6 | .13 | 20 | 2.1 | 1.9 | .15 | 150 | 9.5 |
| 400 | 1.5 | .15 | .25 | .031 | 2.3 | .3 | .25 | .03 | 3.2 | .4 | .19 | .02 | 19 | 1.9 |
| 600 | .5 | Inst | .12 | Inst | .75 | Inst | .13 | Inst | .19 | Inst | .08 | Inst | 1.6 | Inst |
| 800 | .051 | Inst | .051 | Inst | .16 | Inst | .07 | Inst | .06 | Inst | .05 | Inst | .06 | Inst |
| 1,000 | .026 | Inst | .026 | Inst | .04 | Inst | .04 | Inst | .045 | Inst | .036 | Inst | .043 | Inst |

See footnotes at end of table.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Tripping-time delay (configuration 1) – Continued. 1/

| Time delay percent rated current | Tripping-time delay at -40°C ±2°C and +85°C ±2°C (tripping time in seconds) | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 50 V dc | | | | 240 V ac, 60 Hz | | | | 240 V ac, 400 Hz | | | | | |
| | A | | B | | C | | D | | E | | F | | G | |
| | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 500 | .5 | 100 | .1 | 500 | 1 | 100 | .1 | N/A | N/A | N/A | N/A | N/A | N/A |
| 150 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 500 | .5 | 100 | .1 | 1500 | 5 |
| 200 | 100 | .1 | 10 | .05 | 100 | .05 | 10 | .05 | 100 | .1 | 10 | .05 | 500 | .5 |
| 400 | 20 | Inst | 3 | Inst | 20 | Inst | 3 | Inst | 20 | Inst | 3 | Inst | 100 | Inst |
| 600 | 5 | Inst | 1 | Inst | 5 | Inst | 1 | Inst | 5 | Inst | 1 | Inst | 5 | Inst |
| 800 | 2 | Inst | .5 | Inst | .5 | Inst | .5 | Inst | .5 | Inst | .5 | Inst | .5 | Inst |

1/ Circuit breakers shall not trip at 100 percent rated current. Delays A, B, C, and D must trip at 125 percent of rated current and delays E, F, and G must trip at 150 percent of rated current. Between 100 percent and 125 or 150 percent, they may trip. Instantaneous is defined as less than 15 milliseconds.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE IV. Tripping-time delay (configuration 2). 1/

| Time delay percent rated current | Tripping-time delay at 25°C ±2°C (tripping time in seconds) | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 50 V dc | | | | 240 V ac, 60 Hz | | | | 240 V ac, 400 Hz | | | | | |
| | A | | B | | C | | D | | E | | F | | G | |
| | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min | Max | Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 60 | 7 | 6.5 | 0.5 | 120 | 10 | 12 | 0.7 | N/A | N/A | N/A | N/A | N/A | N/A |
| 150 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 70 | 5 | 8 | 0.5 | 400 | 40 |
| 200 | 10 | 0.6 | 1.2 | 0.13 | 20 | 2.2 | 3 | 0.13 | 25 | 2.1 | 1.9 | 0.15 | 150 | 9.5 |
| 400 | 2 | 0.15 | 0.5 | 0.031 | 3 | 0.3 | 1 | 0.03 | 5 | 0.4 | 0.4 | 0.02 | 19 | 1.9 |
| 600 | 1 | Inst | 0.25 | Inst | 2 | Inst | 0.3 | Inst | 2.4 | Inst | 0.25 | Inst | 7 | Inst |
| 800 | 0.5 | Inst | 0.1 | Inst | 0.8 | Inst | 0.15 | Inst | 1 | Inst | 0.1 | Inst | 0.4 | Inst |
| 1,000 | 0.1 | Inst | Inst | Inst | 0.25 | Inst | 0.1 | Inst | 0.1 | Inst | 0.05 | Inst | 0.043 | Inst |

See footnotes at end of table IV.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE VI. Tripping-time delay (configuration 2) - Continued. 1/

| Time delay percent rated current | Tripping-time delay at -40°C ±2°C and +85°C ±2°C (tripping time in seconds) | | | | | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 50 V dc | | | | 240 V ac, 60 Hz | | | | 240 V ac, 400 Hz | | | | | |
| | A | | B | | C | | D | | E | | F | | G | |
| | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min | -40°C Max | +85°C Min |
| 100 | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | | no trip one hour | |
| 125 | 500 | 5 | 100 | 0.1 | 700 | 1 | 100 | 0.1 | N/A | N/A | N/A | N/A | N/A | N/A |
| 150 | N/A | N/A | N/A | N/A | N/A | N/A | N/A | N/A | 600 | 0.5 | 100 | 0.1 | 1500 | 5 |
| 200 | 100 | 0.1 | 10 | 0.05 | 160 | 0.05 | 10 | 0.05 | 130 | 0.1 | 10 | 0.05 | 500 | 0.5 |
| 400 | 20 | Inst | 3 | Inst | 26 | Inst | 3 | Inst | 32 | Inst | 3 | Inst | 100 | Inst |
| 600 | 5 | Inst | 1 | Inst | 13 | Inst | 1 | Inst | 26 | Inst | 1 | Inst | 24 | Inst |
| 800 | 2 | Inst | 0.5 | Inst | 2.8 | Inst | 0.5 | Inst | 8.4 | Inst | 0.5 | Inst | 3 | Inst |

1/ Circuit breakers shall not trip at 100 percent rated current. Delays A, B, C, and D must trip at 125 percent of rated current and delays E, F, and G must trip at 150 percent of rated current. Between 100 percent and 125 or 150 percent, they may trip. Instantaneous is defined as less than 15 milliseconds.





Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.

TABLE VII. Supersession and substitution data.

Circuit breakers covered by this specification sheet are substitutable for the manufacturer's PINs as shown below. This information in no way implies that the manufacturer's PIN is substitutable for the military PIN.

| Superseding military PIN | Superseded manufacturers PIN | |
|---|---|---|
| M55629/9-XXX | CAGE 81541 | CAGE 74193 |
| | Type APG - 66<br>UPG - 66<br>IEG - 66 | Type JA2 |
| | The complete PIN consists of the type (above) plus identification codes for comparable internal connections, voltage, frequency, time delay and current rating. | |

Reference documents. In addition to MIL-PRF-55629, this document references the following:

ASTM-B545 NASM35338

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
Army - CR

Agent:
DLA - CC

Review activities:
Army - AV, CR4, MI
Navy - AS, MC, OS, SH
Air Force - 19, 99

(Project 5925-2010-009)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.daps.dla.mil.



Source: https://assist.dla.mil -- Downloaded: 2026-10-22T23:45Z
Check the source to verify that this is the current version before use.