INCH-POUND


MIL-S-70344/2
29 June 1990

MILITARY SPECIFICATION SHEET

SHIM, LAMINATED, ROUND, CLASS 2 (.003) LAMINATES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the shims described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation:
MIL-S-70344

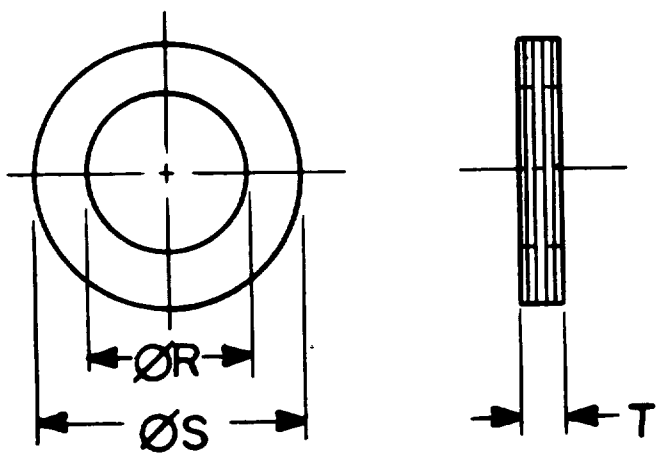

NOTES:
1. All dimensions are in inches.
2. Dimensional data is specified in Table I herein.
3. Shim to be free of burrs.

FIGURE 1. SHIM, LAMINATED, ROUND, CLASS 2 (.003) LAMINATES

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material:
   Aluminum Alloy
   Brass
   CRES

2. Tolerances: Unless otherwise specified, tolerances shall be as specified:

THICKNESS	DIAMETER	
(See procurement specification)	Up to 1 inch	- ± .003
	Over 1 inch up to 3 inches	- ± .005
	Over 3 inches	- ± .010

3. Part number: The part number consists of the letter "M", the basic number of this specification sheet, followed by a dash number taken from Table I plus a material code letter and a type number.

Example: M70344/2-02A1

- Type code
  "1" Type I
  "2" Type II
  "3" Type III
- Material
  "A" Aluminum alloy
  "B" Brass
  "C" CRES
- Dash number as tabulated in Table I
- Specification sheet number

M70344/2-09C2 Indicates - Shim, Laminated, Round; .220 ID x .510 OD x .063 Thick in CRES, one-half solid, one-half laminations of .003 thickness each.

M70344/2-19B1 Indicates - Shim, Laminated, Round; .281 ID x .420 OD x .120 Thick in Brass, all laminations of .003 thickness each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS (.003 LAMINATES)

T THICKNESS																
.016			.032			.060			.062			.063			.068		
DASH NO	ØR ID	ØS OD	DASH NO	ØR ID	ØS OD	DASH NO	ØR ID	ØS OD	DASH NO	ØR ID	ØS OD	DASH NO	ØR ID	ØS OD	DASH NO	ØR ID	ØS OD
01	.180	.360	04	.140	.250	06	2.000	2.740	07	.376	.625	08	.203	.438	15	.400	.645
02	.200	.600	05	1.518	1.916							09	.220	.510			
03	.530	1.000										10	.355	.600			
												11	.456	.750			
												12	.531	1.000			
												13	1.370	2.750			
												14	1.560	3.120			

TABLE I. DASH NUMBERS AND DIMENSIONS (.003 LAMINATES) - CONTINUED

T THICKNESS														
.080			.100			.120			.125			.405		
DASH NO	ØR ID	ØS OD	DASH NO	ØR ID	ØS OD	DASH NO	ØR ID	ØS OD	DASH NO	ØR ID	ØS OD	DASH NO	ØR ID	ØS OD
16	.940	1.220	17	.328	.875	19	.281	.420	20	.265	.355	21	.285	.510
			18	.453	.875									

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Air Force - 99

Review activities:
Army - AV, MI
Air Force - 82
DLA - IS

User activities:
Army - AT
NSA - NS

Preparing activity:
Army - AR

Agent:
DLA - IS

(Project 5365-0123)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T03:25Z
Check the source to verify that this is the current version before use.