
MILITARY SPECIFICATION SHEET

# CAPACITORS, BY-PASS, RADIO-INTERFERENCE REDUCTION, PAPER DIELECTRIC, AC AND DC, (HERMETICALLY SEALED IN METALLIC CASES), STYLES CA36, CA37, AND CA38

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-12889.

**INACTIVE FOR NEW DESIGN** AFTER 30 MARCH 1979
USE MIL-C-19978

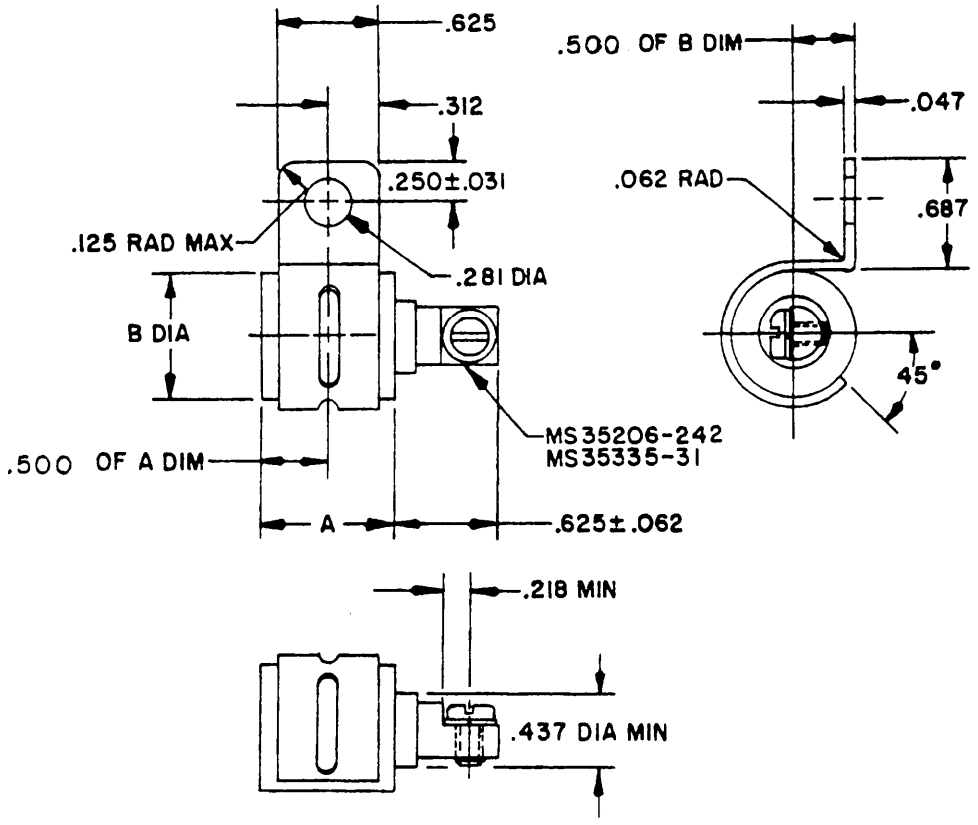


STYLE CA36

FIGURE 1. Dimensions and configurations.



FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:39Z
Check the source to verify that this is the current version before use.


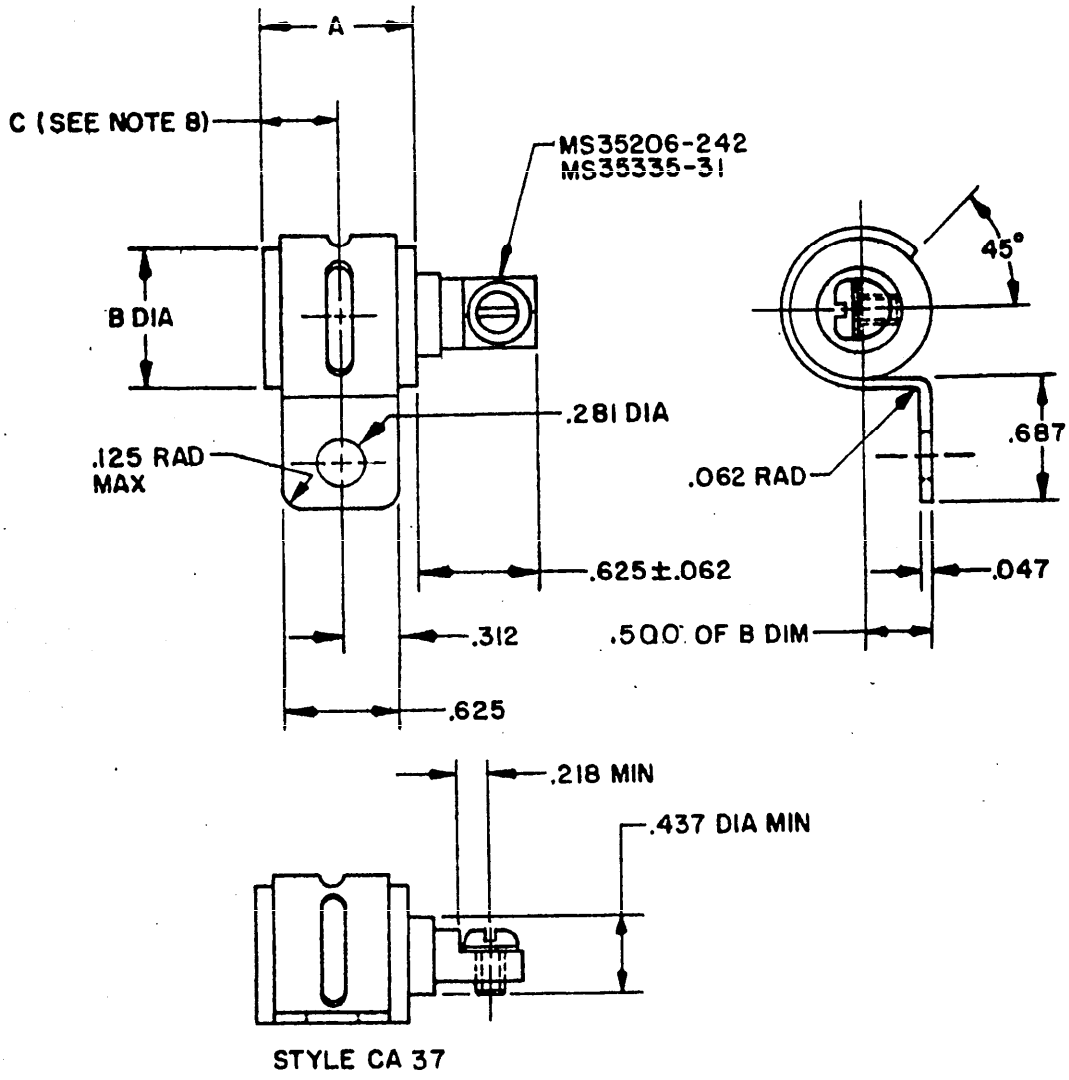



FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:39Z
Check the source to verify that this is the current version before use.

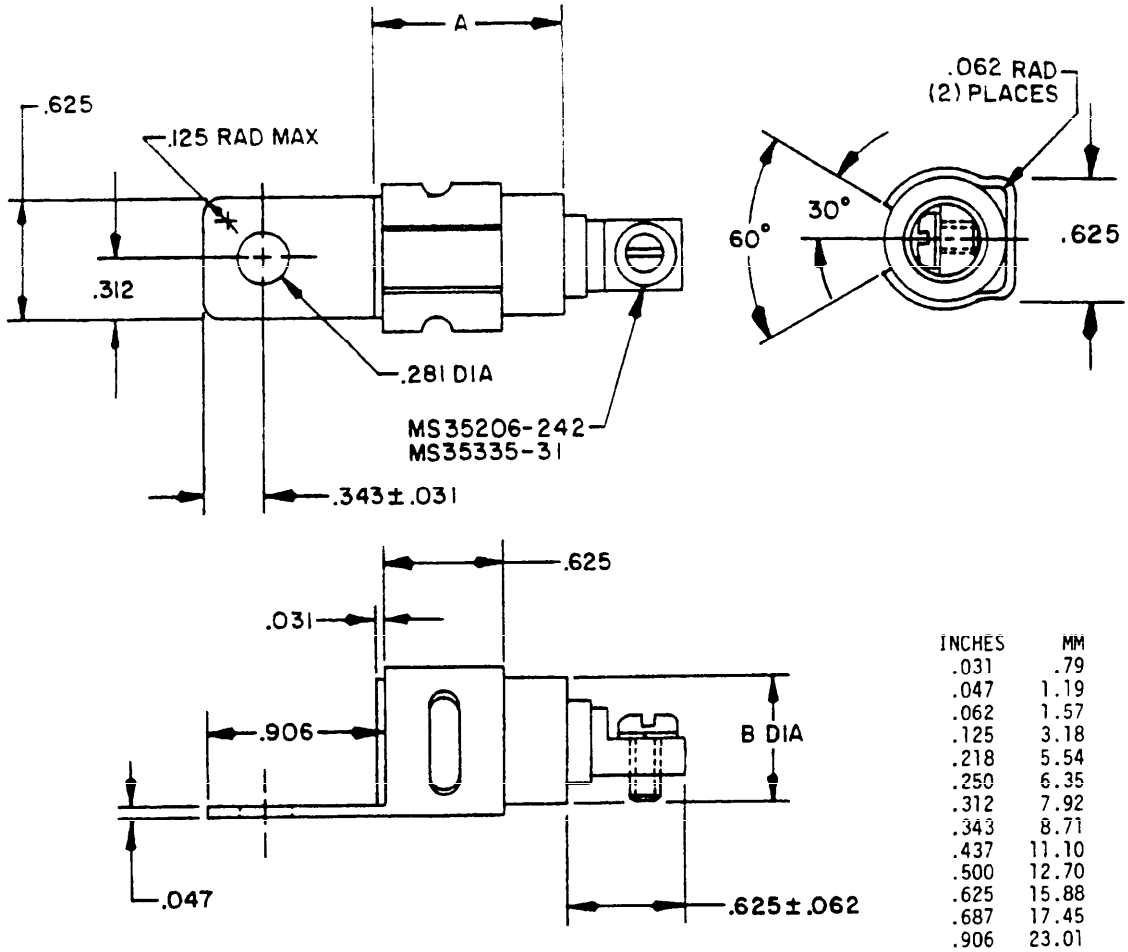


| INCHES | MM |
|---|---|
| .031 | .79 |
| .047 | 1.19 |
| .062 | 1.57 |
| .125 | 3.18 |
| .218 | 5.54 |
| .250 | 6.35 |
| .312 | 7.92 |
| .343 | 8.71 |
| .437 | 11.10 |
| .500 | 12.70 |
| .625 | 15.88 |
| .687 | 17.45 |
| .906 | 23.01 |

STYLE CA38

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerances are ±.005 (.13 mm) on decimals, and ±5° on angles.
5. Terminals to be mounted with the axis of the terminal-screw hole perpendicular within ±5° to the mounting surface.
6. Terminal design optional provided the minimum and maximum dimensions specified are not exceeded.
7. Brackets shall be securely soldered to the case by means of the solder holes.
8. "C" dimension is .5 (12.7 mm) of "A" dimension.

FIGURE 1. Dimensions and configurations - Continued.



Source: https://assist.dla.mil -- Downloaded: 202610-17T23:39Z
Check the source to verify that this is the currentversion before use.

TABLE I. Styles CA36, CA37, and CA38.

| Type designation 1/ | Capacitance | Rated voltage | Capacitance tolerance | Dimensions | |
|---|---|---|---|---|---|
| | | | | A ± .031 (0.79) | B ± .046 (1.17) |
| | µf | Volts, ac-dc | Percent | | |
| CA3-KFW103 | .01 | 500 | + 0, -30 | 1.093 (27.76) | .687(17.45) |
| CA3-KFW104 | .1 | 500 | +50, -10 | 1.593(40.46) | 1(25.4) |
| CA3-KFW254 | .25 | 500 | +50, -10 | 2.593 (65.86) | 1(25.4) |

1/ Complete type designation will include an additional digit to indicate style.

REQUIREMENTS:

Dimensions and configuration - See figure 1 and table I.

Capacitance value: See table I.

Capacitance tolerance: See table I.

DC rated voltage: See table I.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5910-1303-2)



Source: https://assist.dla.mil -- Downloaded: 202610-17T23:39Z
Check the source to verify that this is the current version before use.

# STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be compieted.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-12889/2B CAPACITORS, BY-PASS, RADIO-INTERFERENCE REDUCTION, PAPER DIELECTRIC, AC AND DC, (HERMETICALLY SEALED IN METALLIC CASES) STYLES CA36, CA37, and CA38

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202640-17T23:39Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Cdr, US Army ERADCOM
ATTN: DELET-R-S
Fort Monmouth, NJ 07703

FOLD

☆ U.S. GOVERNMENT PRINTING OFFICE: 1980—603-121/2884 2-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:39Z
Check the source to verify that this is the current version before use.