PERFORMANCE SPECIFICATION SHEET

SOCKET, PLUG-IN ELECTRONIC COMPONENTS,
FOR RELAYS, 3-POLE, 25 AMPERES
(MIL-R-6106 AND MS27743)

This amendment forms part of MIL-PRF-12883/48B, dated 28 June 1996 and is approved for use by all Departments and agencies of the Department of Defense.

PAGE 1

Figure 1, socket configuration, delete and substitute the figure with one below:

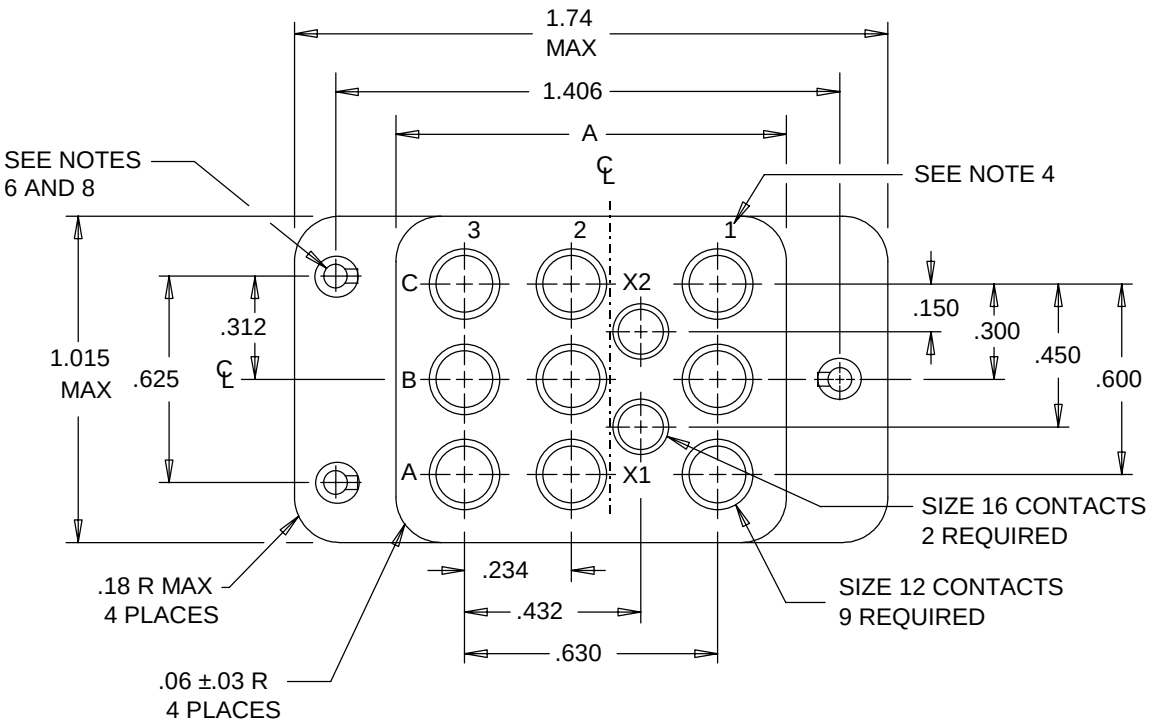

MATING FACE

-01 THROUGH -04

PAGE 5

Note 3, delete and substitute the following: Unless otherwise specified tolerances are ±.01 inch (0.25 mm) for two place decimals and ±.005 inch (0.13 mm) for three place decimals.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

Figure 3, Top mount (TYP), delete and substitute the figure with figure below.

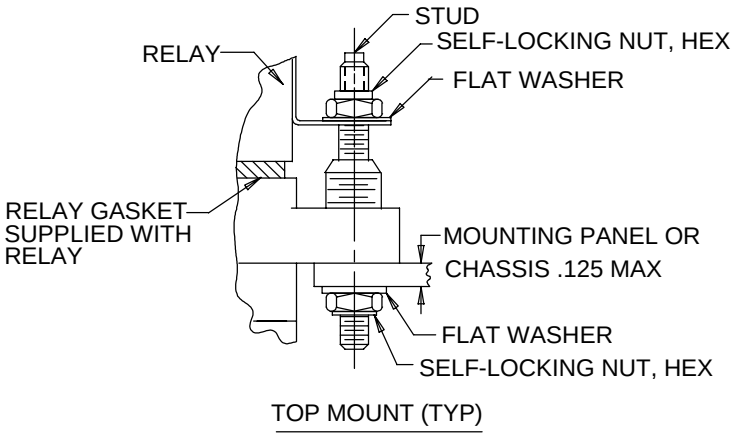

Figure 4, Stud fixed, delete and substitute the figure with figure below.

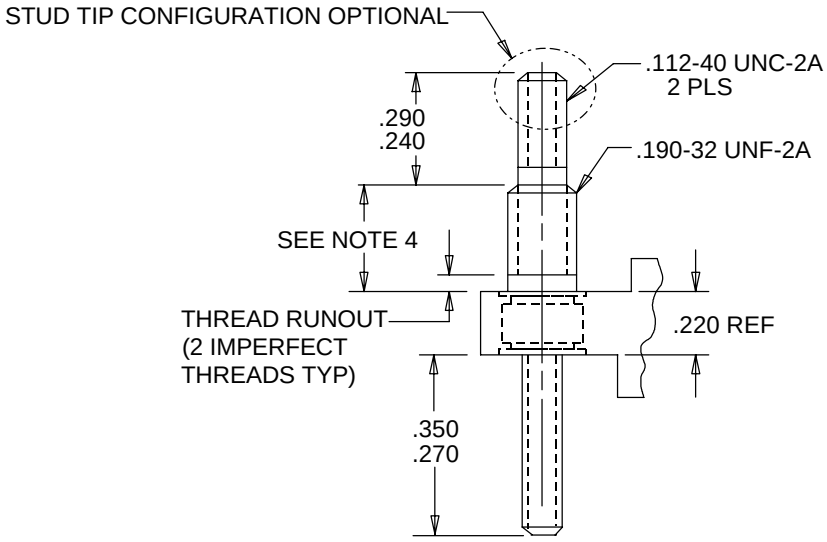

Figure 4, Stud fixed, add notes to drawing.

NOTES
1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. Unless otherwise specified, tolerances are ±.005 inch (0.25 mm) for three place decimals and ±.01 inch (0.25 mm) for two place decimals.
4. .318 ±.010 inch (8.08 ± .0.25 mm) from top of socket flange to base of .112-40 UNC-2A thread for -04 and -08, and .290 ±.010 inch (7.37 ±0.25 mm) for -02 and -06.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

5. PAGE 7

Figure 5, Stud loose, delete and substitute the figures with figures below:

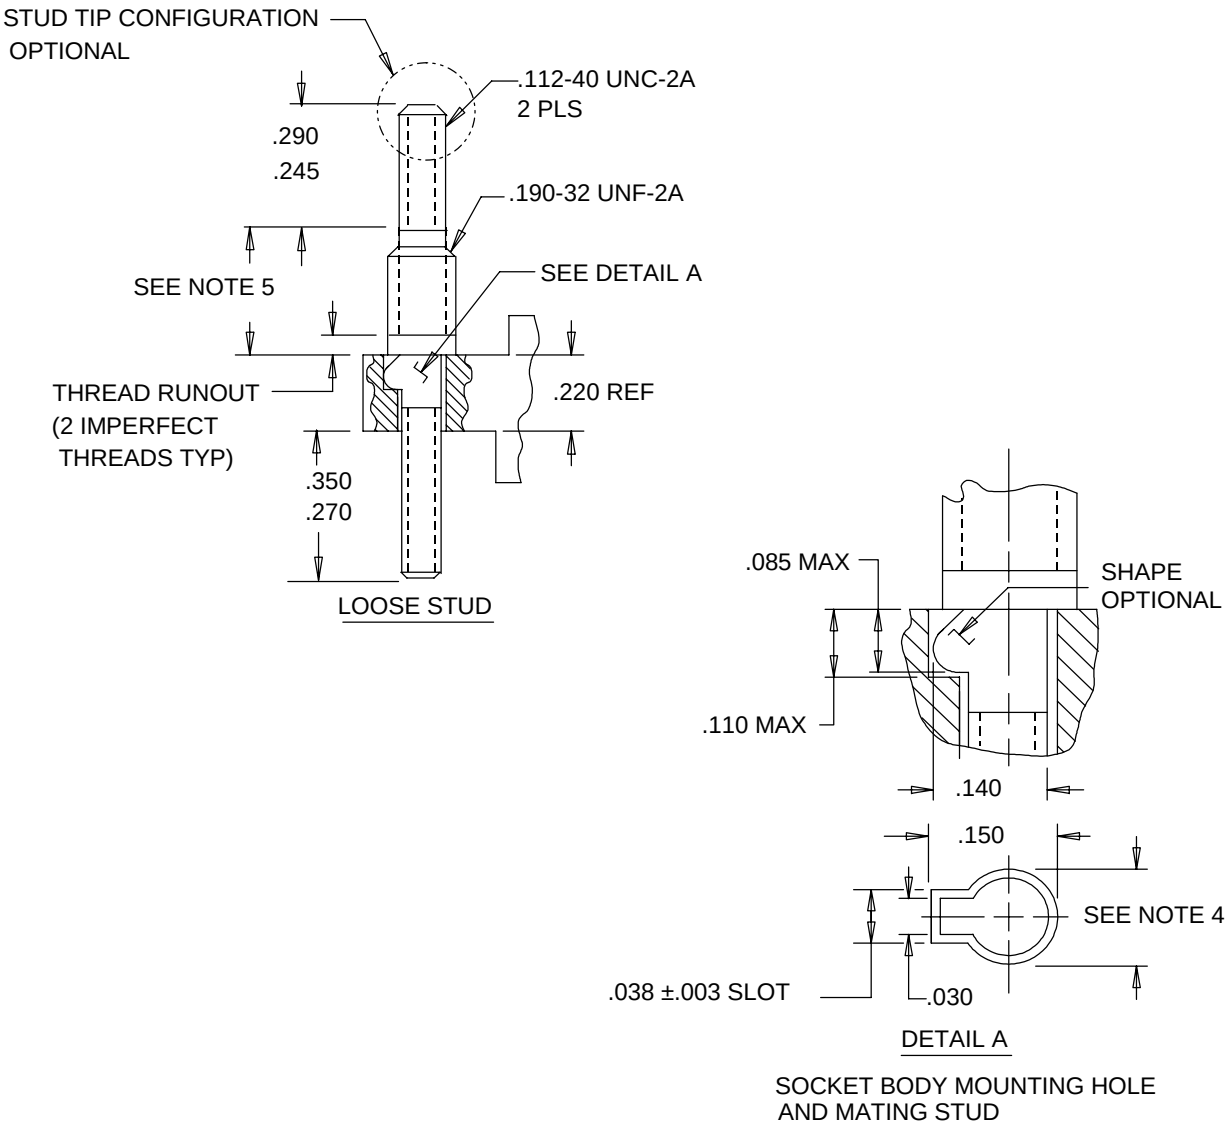

Notes 4 and 5, delete and substitute:

4. The diameter for the loose stud mating hole in the socket body shall be:
   for -03, AND -07 diameter shall be .125±.003 inch (3.18 ±0.08 mm),
   for -01, and -05, diameter shall be .116±.003 inch (2.95 ±0.08 mm).
5. .290 inch (7.37 mm) for -01, -02, -05, and -06 .318 inch (8.08 mm) for -03, -04, -07, and -08 sockets.

PAGE 8

Fifth sentence, Grommet change “silicon” to “silicone”.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

PAGE 9

Table II, delete and substitute:

TABLE II. Wire sealing range .

Contact size	Contact	Wire diameter (mm)
16-16	M39029/92-533 M39029/5-116	.065 min to.109 max (2.46 min to 2.77 max)
12-12	M39029/92-535 M39029/5-118	.097 min to .142 max (2.46 min to 3.60 max)

PAGE 10

First paragraph after table III, delete "ochassis" replace with "chassis".

Second sentence from bottom, delete,."019" and replace with ".036".
Third sentence from bottom, change ".190 flat washers" to "190-32 self locking nuts".

PAGE 11

First paragraph after table IV, second sentence, delete "Socketsshall" replace with "Sockets shall".

CONCLUDING MATERIAL

Custodian:
ARMY - CR
NAVY - EC
Air Force - 85

Review activity:
Army - AR, AT, AV
Navy - AS, MC, OS, SH
Air Force - 99

Preparing activity:
DLA - CC

(Project 5935-4134)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.