INCH-POUND
MIL-DTL-12883/48D
w/AMENDMENT 1
3 Aug 2015
SUPERSEDING
MIL-DTL-12883/48D
18 February 2003

DETAIL SPECIFICATION SHEET

SOCKET, PLUG-IN ELECTRONIC COMPONENTS, FOR RELAYS, 3-POLE, 25 AMPERES (MIL-PRF-83536/32 AND /33)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification and MIL-DTL-12883.


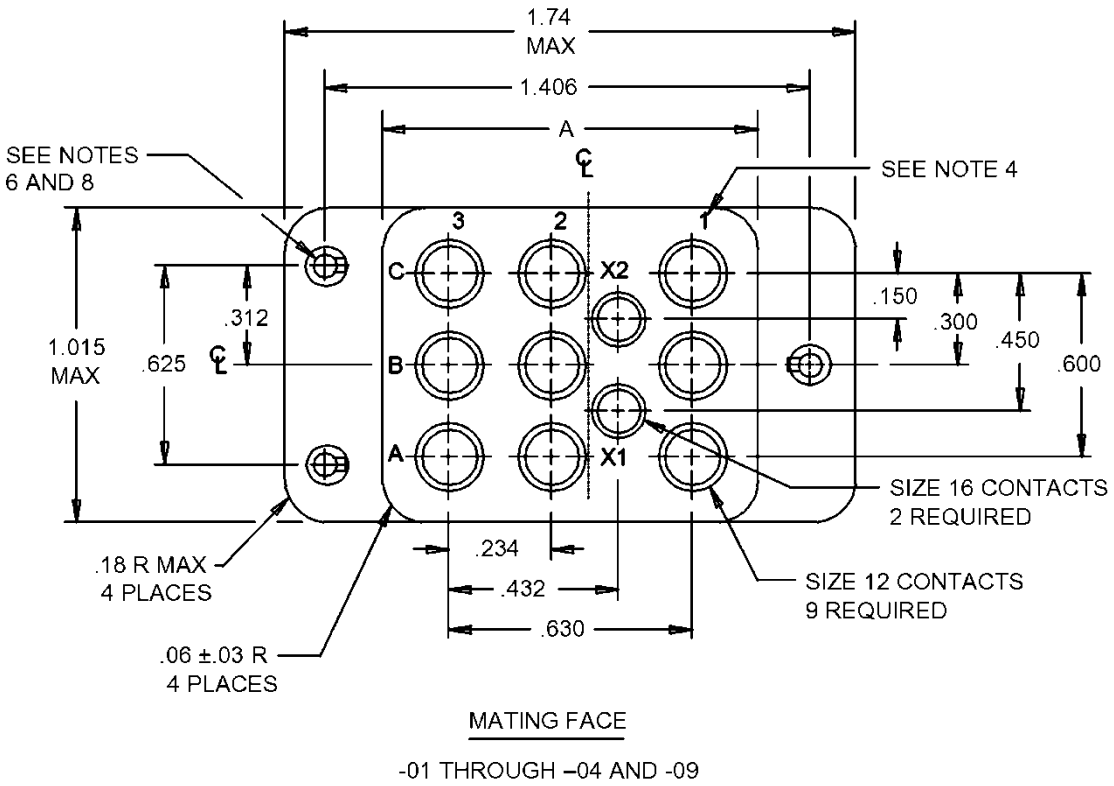


FIGURE 1. Socket configuration.

AMSC N/A


FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

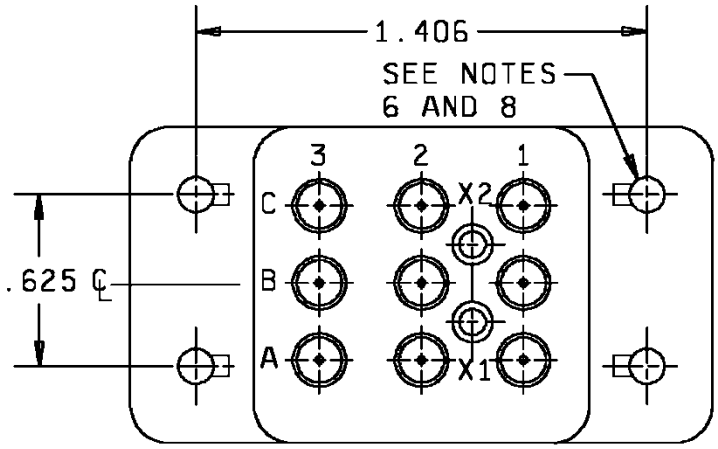

MATING FACE

-05 THROUGH -08 AND -10

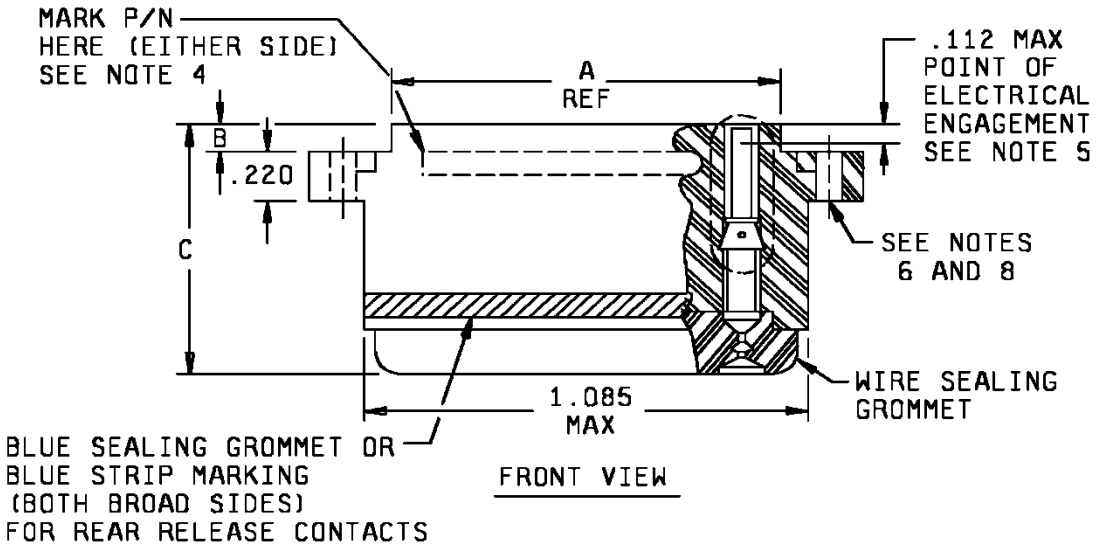

FRONT VIEW

Dimensions

Dash number	A (mm)	B (mm)	C max (mm)
-01, -02, -05, -06, 09 and -10	1.000 (25.40)	.093 (2.36)	.890 (22.61)
-03, -04, -07, and -08	1.025 (26.04)	.140 - .135 (3.56 - 3.43)	1.250 (31.75)

FIGURE 1. Socket configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.


Inches	mm	Inches	mm
.03	0.76	.312	7.92
.06	1.52	.432	10.97
.112	2.84	.450	11.43
.150	3.81	.600	15.24
.174	4.42	.625	15.88
.18	4.57	.630	16.00
.220	5.59	1.015	25.78
.234	5.94	1.085	27.56
.300	7.62	1.406	35.71

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. Unless otherwise specified tolerances are ± .01 inch (0.25 mm) for two place decimals and ± .005 inch (0.13 mm) for three place decimals.
4. Marking shall be characters, which are molded .035 inch (0.89 mm) minimum ink marking optional in accordance with MIL-STD-1285.
5. Point of electrical contact from mating face of socket insulator to the socket contact.
6. Keyway is shown for loose stud mounting configuration only (see figure 5, detail A).
7. For mating relay see table I.
8. Configuration for mounting see figures 4, 5 and table I.

FIGURE 1. Socket configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

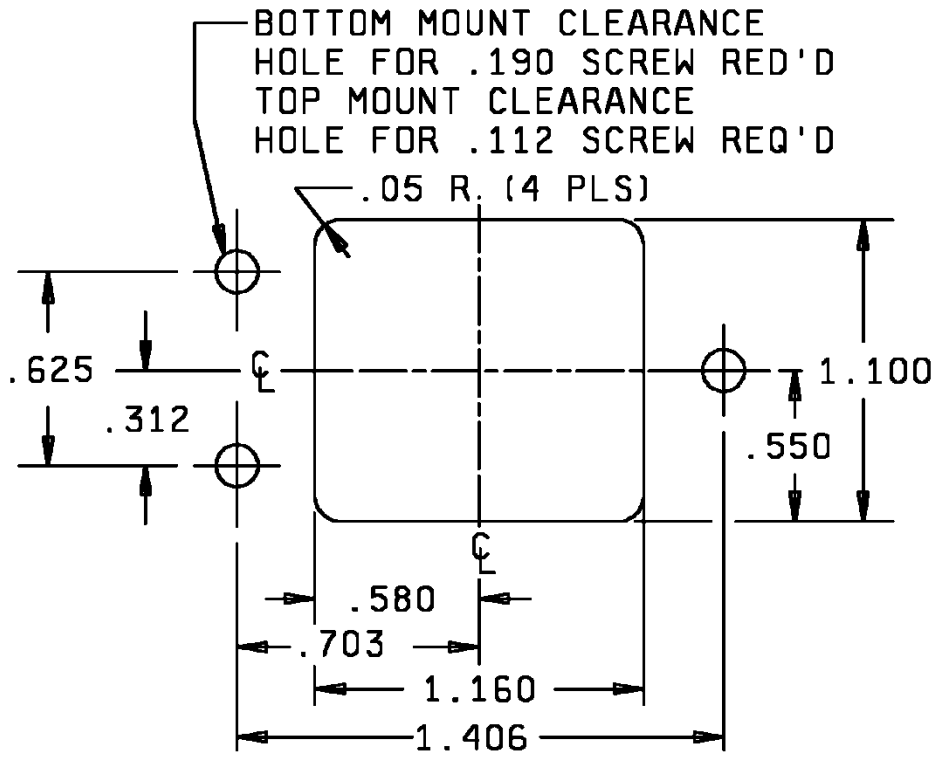


Inches	mm
.05	1.27
.112	2.84
.190	4.83
.312	7.92
.550	13.97
.580	14.73
.625	15.88
.703	17.86
1.100	27.94
1.160	29.46
1.406	35.71

RECOMMENDED MOUNTING DIMENSIONS
-01 THROUGH -04 AND -09

FIGURE 2. Recommended mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

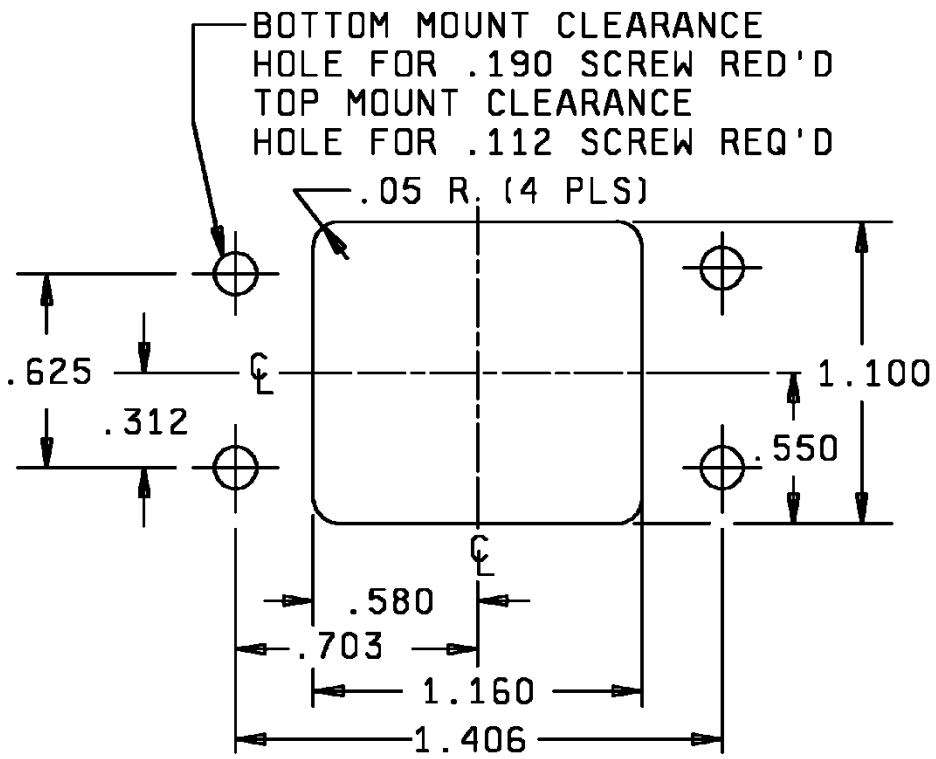

Inches	mm
.05	1.27
.112	2.84
.190	4.83
.312	7.92
.550	13.97
.580	14.73
.625	15.88
.703	17.86
1.100	27.94
1.160	29.46
1.406	35.71


RECOMMENDED MOUNTING DIMENSIONS

-05 THROUGH -08 AND -10

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified tolerances are ± .01 inch (0.25 mm) for two place decimals and ± .005 inch (0.13 mm) for three place decimals.


FIGURE 2. Recommended mounting dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

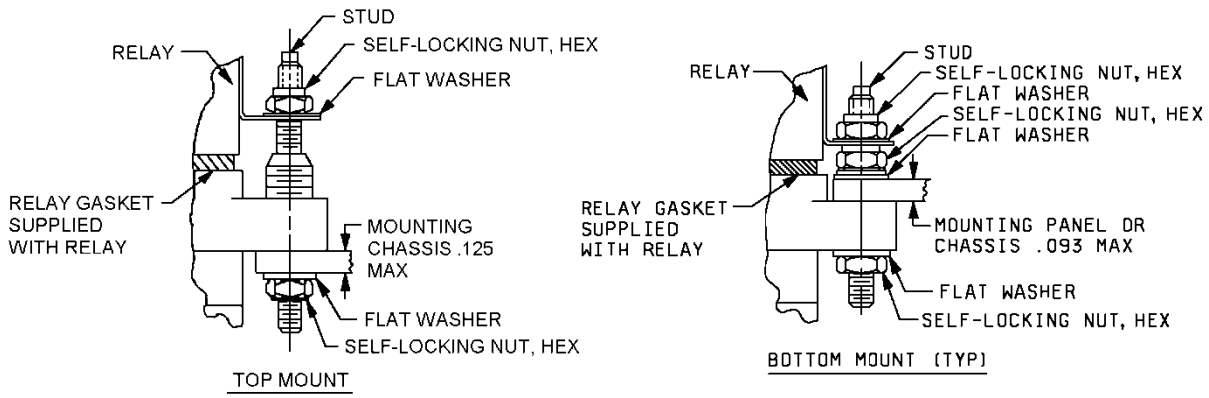

Inches	mm
.093	2.36
.125	3.18

FIGURE 3. Socket mounting, fixed and loose studs.

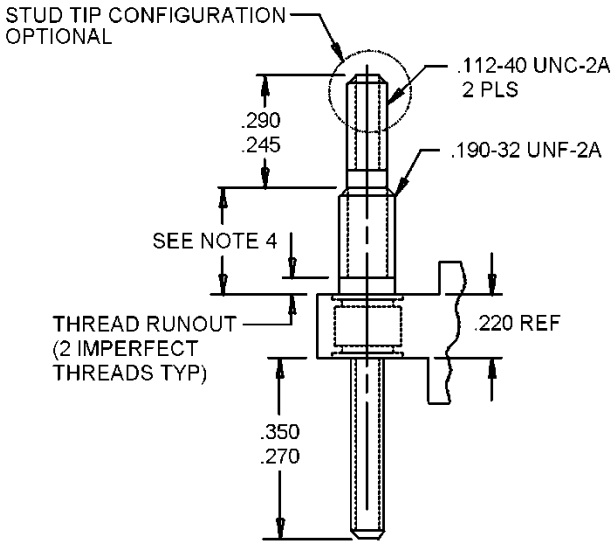


Inches	mm
.093	2.36
.112	2.84
.125	3.18
.190	4.83
.220	5.59
.245	6.22
.270	6.86
.290	7.37
.350	8.89

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. Unless otherwise specified, tolerances are ± .005 inch (0.13 mm) for three place decimals and ± .01 inch (0.25 mm) for two place decimals.
4. Length from top of socket flange to base of .112-40 UNC-20 thread fixed stud:
   -04 and -08 length shall be .318 ± .010 inch (8.08 ± 0.25 mm).
   -02 and -06 length shall be .290 ± .010 inch (7.37 ± 0.25 mm).

FIGURE 4. Stud fixed.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

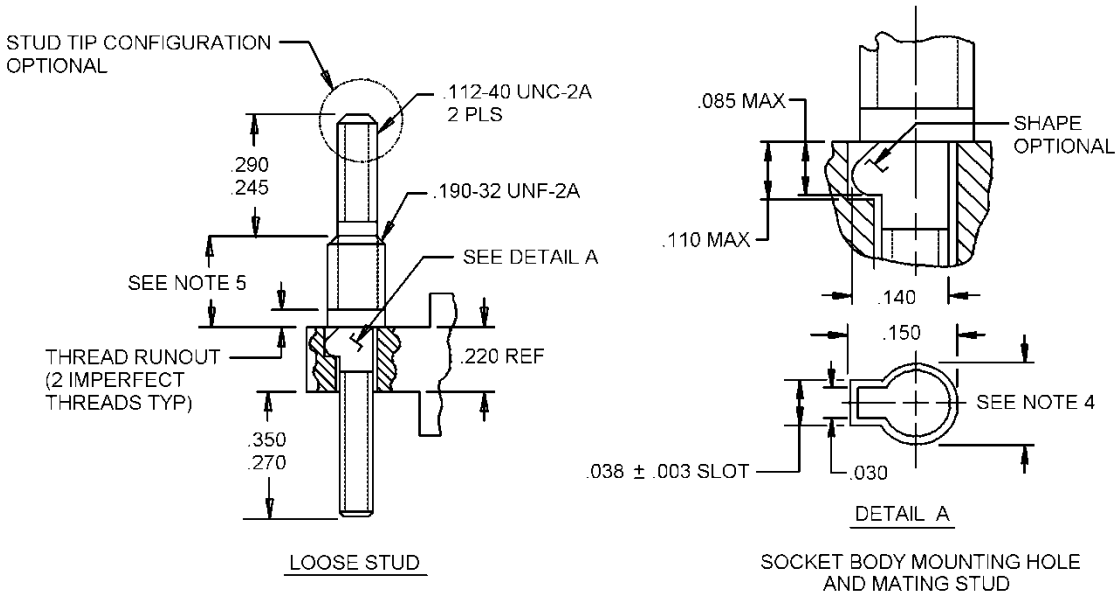

Inches	mm	Inches	mm
.003	0.08	.150	3.81
.030	0.76	.190	4.83
.038	0.97	.220	5.59
.085	2.16	.245	6.22
.110	2.79	.270	6.86
.112	2.84	.290	7.37
.140	3.56	.350	8.89

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are for general information only.
3. Unless otherwise specified, tolerances are ± .005 inch (0.13 mm) for three place decimals and ± .01 inch (0.25 mm) for two place decimals.
4. The diameter for the socket body mounting hole shall be:
   -03 and -07 diameter shall be .125 ± .003 inch (3.175 ± 0.076 mm)
   -01 and -05 diameter shall be .116 ± .003 inch (2.946 ± 0.076 mm).
5. Length from top of socket flange to base of .112-40 UNC-20 thread loose stud:
   -03, -04, -07, and –08 length shall be .318 ± .010 inch (8.08 ± 0.25 mm)
   -02, -05, -06, -09, and –10 length shall be .290 ± .010 inch (7.37 ±0.25 mm).

FIGURE 5. Stud loose.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction: See figures 1 through 5, and tables I through V.

Insulator: Diallyl phthalate, in accordance with ASTM-D5948, type SDG-F, any glass filled thermoplastic material in accordance with ASTM-D5204.

Color: Material color shall be optional providing that the color provides a contrasting background for the blue sealing grommet or blue color bands indicating rear release contacts.

Grommet: Silicone rubber.

Mounting hardware: Corrosion resistant steel or steel with cadmium/chromate finish.

Electrical:

Insulation resistance: 1000 megohms minimum. Test pin diameter, size 16, .0625 ± .0010 inch (1.588 ± 0.025 mm), size 12, .094 ± .001 inch (2.388 ± 0.025 mm).

Dielectric withstanding voltage:

Sea level, the following conditions shall apply:

a. Test voltage, 1500 V rms.

b. Test pin diameter:
Size 16, .0625 ± .0010 inch (1.588 ± 0.025 mm).
Size 12, .094 ± .001 inch (2.388 ± 0.025 mm) as appropriate.

High altitude (80,000 feet (24.4 km), the following conditions shall apply:

a. For purposes of this test an air pressure of 26 millibar (2.6 kilopascals), will be used to simulate an altitude of 80,000 feet (24.4 km).

b. Test voltage, 500 V rms.

c. Test pin diameter:
Size 16 .0625 ± .0010 inch (1.588 ± 0.025 mm).
Size 12, .094 ± .001 inch (2.388 ± 0.025 mm).

Contacts: Contacts shall be removable crimp type in accordance with SAE-AS39029/92, or SAE-AS39029/5 (see table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers and configurations.

Dash number	Mounting style	Contact size		Number of contacts	Contact designation M39029	Mating relay M83536 /32 and /33
		Mating end	Wire barrel			
01	Loose stud (figure 5)	12	12	9	/92 - 535	-003
		16	16	2	/92 - 533	
02	Fixed stud (figure 4)	12	12	9	/92 - 535	
		16	16	2	/92 - 533	
03	Loose stud (figure 5)	12	12	9	/5 - 118	
		16	16	2	/5 - 116	
04	Fixed stud (figure 4)	12	12	9	/5 - 118	
		16	16	2	/5 - 116	
05	Loose stud (figure 5)	12	12	9	/92 - 535	
		16	16	2	/92 - 533	
06	Fixed stud (figure 4)	12	12	9	/92 - 535	
		16	16	2	/92 - 533	
07	Loose stud (figure 5)	12	12	9	/5 - 118	
		16	16	2	/5 - 116	
08	Fixed stud (figure 4)	12	12	9	/5 - 118	
		16	16	2	/5 - 116	
09	Fixed stud (figure 4)	12	16	9	1/ /92-536	
		16	16	2	/92-533	
10	Fixed stud (figure 4)	12	16	9	1/ /92-536	
		16	16	2	/92-533	

1/ CAUTION: Because of the wire barrel size of M39029/92-536, current overload may be experienced at 12 amperes.

Environmental:

Temperature range: Operating temperature range -70 degrees C to +125 degrees C.

Wire sealing: A resilient grommet is permanently bonded to the wire entry face of the socket so as to provide moisture sealing capabilities. Wiring sealing range shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

TABLE II. Wire sealing range.

Contact size	Contact	Wire diameter (mm)
16-16	M39029/92-533 M39029/5-116	.065 min to.109 max (1.65 min to 2.77 max)
12-12	M39029/92-535 M39029/5-118	.097 min to .142 max (2.46 min to 3.61 max)

Mechanical:

Vibration (sinusoidal): In accordance with MIL-STD-202, method 204, test condition G, the following conditions shall apply.

a. Except that the frequency range shall be varied logarithmically between the limits of 10 Hz and 3,000 Hz.

b. Except that the procedure of MIL-STD-202, method 201 may be applied during 10 Hz to 55 Hz band of the vibration frequency range.

c. Mating relay shall be used as a test gauge.

Vibration (random): In accordance with EIA-364-28, test condition V, letter G, with a test duration 15 minutes. The mating relay shall be used as the test gage.

Shock (mechanical): In accordance with MIL-STD-202, method 213, condition C, except peak value shall be 200 g's.

Insertion and withdrawal forces: The insertion and withdrawal forces of the relay and socket shall be as specified as in table III.

TABLE III. Insertion and withdrawal forces.

Condition	Inspection	Insertion force
Initial	Insertion force (max)	21 lbf (93 newton)
	Withdrawal force (min)	2.0 lbf (8.9 newton)
After 10 insertions and withdrawals; before vibration	Insertion force (max)	23 lbf (102 newton)
	Withdrawal force (min)	2.0 lbf (8.9 newton)
After vibration	Insertion force	23 lbf (102 newton)
	Withdrawal force (min)	2.0 lbf (8.9 newton)

Mounting hardware: The mounting hardware shall allow mounting the socket above, or below the panel or chassis (see figures 3, 4 and 5), and shall allow mounting and securing the relay to the socket without disturbing the mounted socket or access to the wiring side of the socket. The hardware shall provide the nominal spacing between socket surface and relay mounting flange, regardless of mounting configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

Supplied with relay socket 12883/48-01 through M12883/48-04 and M12883/48-09.

6 each .112-40 self locking nuts (.206 max dia x .176 max height).

6 each .112 flat washers (.224 max O.D. x .021 max thick).

3 each .190-32 self locking nuts (.330 max dia x .190 max height).

3 each .190 flat washers (.360 max O.D. x.019 max thick).

3 each studs for loose mounting configuration only (see figure 5).

Supplied with relay socket M12883/48-05 through M12883/48-08 and M12883/48-10

8 each .112-40 self locking nuts (.206 maximum diameter x .176 maximum height).

8 each .112 flat washers (.224 maximum O.D. x .021 maximum thickness).

4 each .190-32 self locking nuts (.330 maximum diameter x .190 maximum height).

4 each .190 flat washers (.360 maximum O.D. x .036 maximum thickness).

4 each studs for loose mounting configuration only (see figure 5).

Fixed mounting studs: Studs shall be fixed into the mounting flange of the socket and shall be designed so as to prevent rotation of the stud within the flange (see figure 4).

Contact installation tools: see table IV, approved equivalent industry standard tools may also be used where appropriate.

TABLE IV. Contact installation tools.

Nomenclature	Part or Identifying Number (PIN)	
	Size 12	Size 16
Crimp tool	M22520/1-01, M22520/7-01	M22520/1-01, M22520/7-01
Positioner	M22520/1-02, M22520/7-03	M22520/1-02, M22520/7-03
Insertion/removal tool Unwired Wired	M81969/30-06, /30-07 M81969/8-08, /8-10, /14-04, /14-032	M81969/14-03 M81969/30-06

Torque: Relay socket and hardware shall be subjected to torque testing as specified in table V. Sockets shall be installed in mounting panel when test torque is applied. No visual evidence of physical damage shall be permitted. Torque shall be maintained for a reasonable period of time to insure stud, socket, and associated hardware have not been damaged (see table V).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.


TABLE V. Torque requirements (installed in panel conditions).

Thread size	Torque			
	Testing		Installation	
	Inch-pounds	Newton-meters	Inch-pounds	Newton-meters
.112-40	8 + 1 - 0	0.90 + 0.11 - 0	4 ±1	0.45 ± 0.11
.190-32	24 + 1 - 0	2.71 + 0.11 - 0	18 ±1	2.03 ± 0.11

Weight: .132 pound (60 grams) maximum weight of relay socket, all contacts, and all associated hardware.

PIN: The PIN shall be marked on the socket body as shown in the example (see figure 1). The PIN shall consist of the basic number of this specification sheet, the dash number from table I, and an optional modifier.

Example:

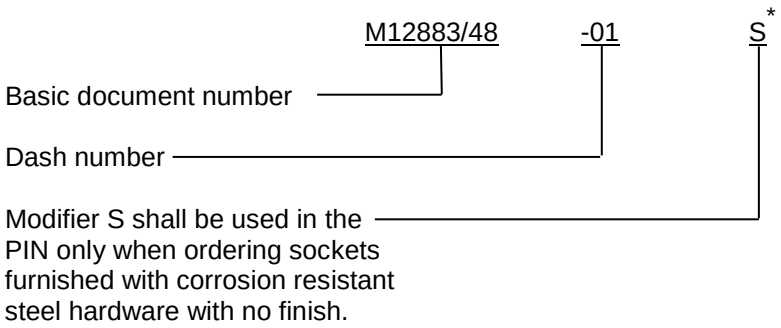

* For future acquisition of these sockets as of the effective date of revision D, 20 December 1989, parts identified with an "S": modifier shall be corrosion resisting steel (CRS), and parts without an "S" modifier shall be cadmium chromate finish. No mixing of hardware types shall be permitted.

Ordering data: Sockets without contacts may be ordered when so indicated in the ordering data (see MIL-DTL-12883). This applies only to original equipment manufacturers (OEM's) and subcontractors. All direct shipments to the government shall include all applicable contacts and mounting hardware. The PIN to be marked on the socket shall be as shown in the PIN example see figure 1 and table I.

The Government PIN, specified in table VI, supersedes the following commercial PINs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

TABLE VI. Supersession and cross reference.

Active Government PIN	Superseded manufacturers PIN	
	CAGE 58982	CAGE 99699
M12883/48-01	RSE112061	SME325-2001 AND S
M12883/48-02	RSE112063	SME325-1001 AND S
M12883/48-03	RSL112105	SE325-2002 AND S
M12883/48-04	RSL112101	SME325-2002 AND S
M12883/48-05	RSE112065	SME325-2002 AND S
M12883/48-06	RSE112067	SME3250-1002 AND S
M12883/48-07	RSL112107	SE325-2003 AND S
M12883/48-08	RSL112103	SE325-1008 AND S

Amendment notations: The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents: In addition to MIL-DTL-12883, this document references the following:

MIL-STD-202
MIL-STD-1285
MIL-PRF-83536/32
MIL-PRF-83536/33
ASTM-D5204
ASTM-D5948
EIA-364-28
SAE-AS39029/5
SAE-AS39029/92

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2015-166)

Review activities:
Army - AR, AT, CR4
Navy - AS, MC, OS, SH
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.