INCH-POUND


MIL-PRF-12883/49A
28 June 1996
SUPERSEDING
MIL-S-12883/49
24 July 1992

PERFORMANCE SPECIFICATION SHEET

SOCKETS AND ACCESSORIES FOR PLUG-IN ELECTRONIC COMPONENTS,
MOUNTING TRACKS FOR RELAYS, 10 AMPERES
(MIL-R-6106, MIL-R-83536, AND MIL-R-83726)

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-12883.

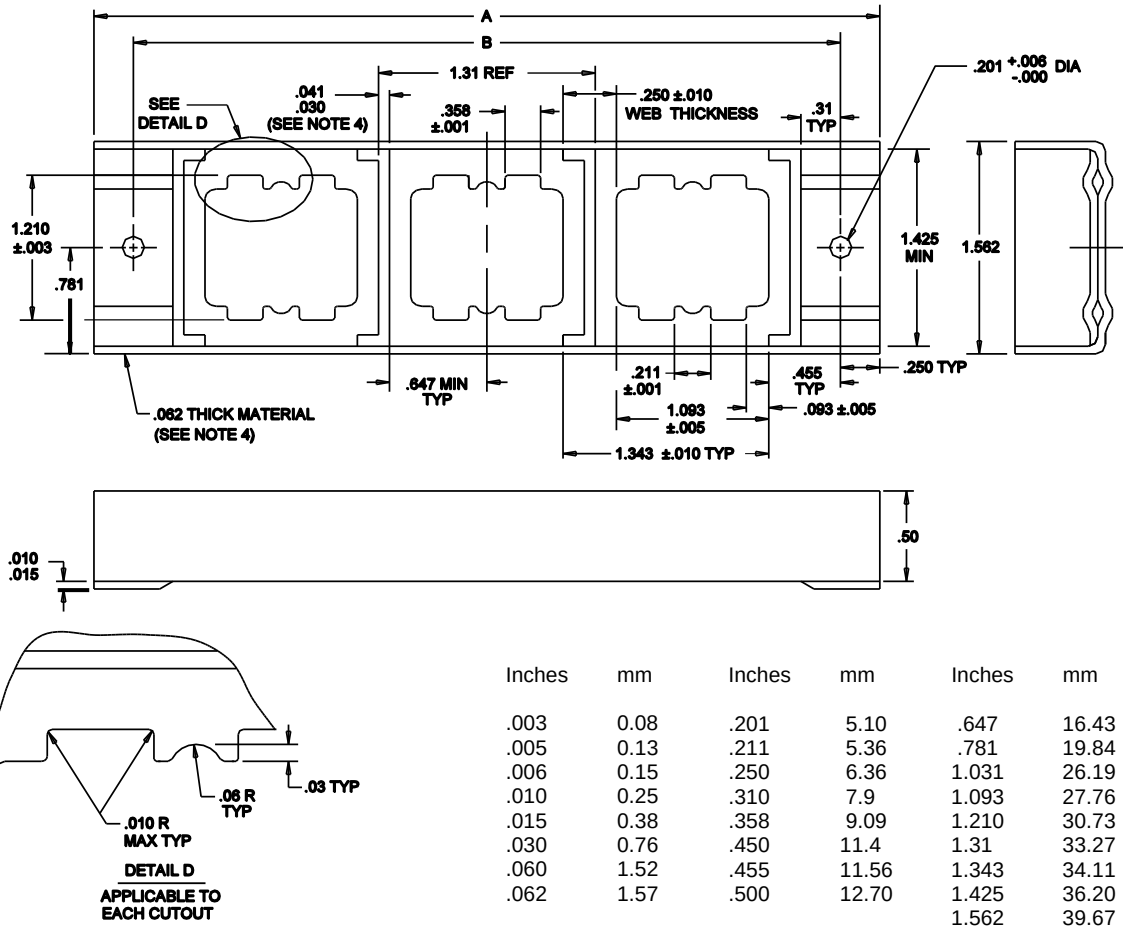

Inches	mm	Inches	mm	Inches	mm
.003	0.08	.201	5.10	.647	16.43
.005	0.13	.211	5.36	.781	19.84
.006	0.15	.250	6.36	1.031	26.19
.010	0.25	.310	7.9	1.093	27.76
.015	0.38	.358	9.09	1.210	30.73
.030	0.76	.450	11.4	1.31	33.27
.060	1.52	.455	11.56	1.343	34.11
.062	1.57	.500	12.70	1.425	36.20
				1.562	39.67

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.010 inch (0.25 mm).
4. Material shall be, 302 or 304L, annealed stainless steel.

FIGURE 1. Outline configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Reference material: (see 3.1.1 of MIL-PRF-12883)

Material: 302 stainless steel, annealed and nickel plated per QQ-N-290, or an equivalent industry standard, 100 microinches minimum, or 304L stainless steel, annealed and passivated.

Finish: Shot peen, per MIL-S-13165 or commercial equivalent.

Plating: Sulfamate nickel per QQ-N-290. Thickness shall be 100 microinches minimum.

Part or identifying number (PIN): The PIN shall consist of the basic number of this specification sheet and the dash number from table I.

Example

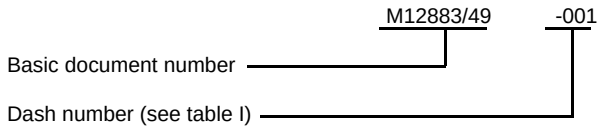


TABLE I. Dash number and characteristics.

Dash number 1/	Number of track cutouts 2/	Dimensions 3/		Max Weight ounces (grams)
		A	B	
001	1	2.50 (63.5)	2.000 (50.80)	1.78 (50.30)
002	2	3.84 (97.54)	3.343 (84.91)	2.36 (66.91)
003	3	5.19 (131.83)	4.687 (119.05)	3.2 (90.9)
004	4	6.53 (165.86)	6.031 (153.19)	4.0 (113.6)
005	5	7.87 (199.90)	7.375 (187.33)	4.18 (118.34)
006	6	9.22 (234.19)	8.718 (221.44)	5.1 (144.6)

1/ To be used in conjunction with MIL-PRF-12883/50 and MIL-PRF-12883/51.
2/ MIL-R-6106/35 shall be used to fill cutouts when socket module is not installed.
3/ Dimensions are in inches. Millimeters are in parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.

SUPERSESSION DATA: See table II.

TABLE II. Supersession data. 1/

Superseded dash number M6106/3-	Superseding PIN
001	M12883/49-001
002	M12883/49-002
003	M12883/49-003
004	M12883/49-004
005	M12883/49-005
006	M12883/49-006

1/ For Government logistics support, supersession data becomes applicable when a qualified products list becomes available.

The Government PIN, specified in table III, supersedes the following commercial part numbers.

TABLE III. Supersession and cross reference.

Active Government PIN	Superseded manufacturers part number
	CAGE 99699
M12883/49-001	2210-15
M12883/49-002	2210-16
M12883/49-003	2210-17
M12883/49-004	2210-18
M12883/49-005	2210-19
M12883/49-006	2210-20

CONCLUDING MATERIAL

Custodian:
Navy - EC
ARMY - CR
Air Force - 85

Preparing activity:
DLA - ES

(Project 5935-4015-11)

Review activity:
Air Force - 99
Army - MI

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:36Z
Check the source to verify that this is the current version before use.