INCH-POUND


MIL-PRF-12883/51A
28 June 1996
SUPERSEDING
MIL-S-12883/51
24 July 1992

PERFORMANCE SPECIFICATION SHEET

SOCKETS AND ACCESSORIES FOR PLUG-IN ELECTRONIC COMPONENTS, BRACKET AND SOCKET ASSEMBLY FOR RELAYS, 4-POLE, 10 AMPERES (MIL-R-6106, MIL-R-83536, AND MIL-R-83726)

This specification is approved for use by the Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specificat and Standards (DODISS) specified in the solicitation: MIL-PRF-12883.

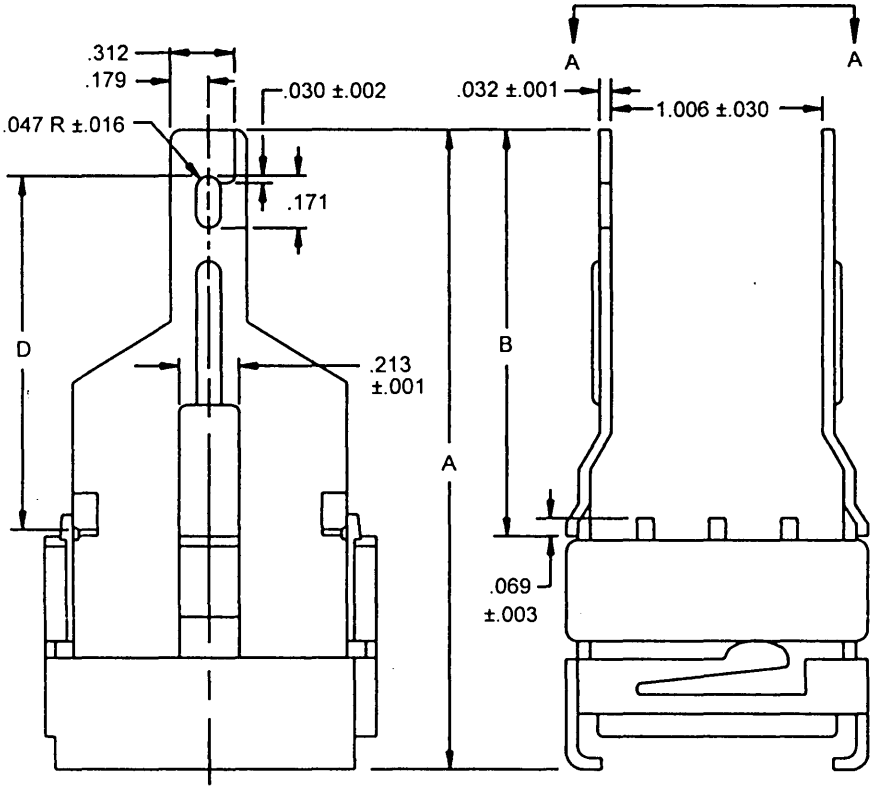

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	0.31	0.79	.171	4.34	.520	13.21
.002	0.05	0.32	0.81	.179	4.55	.800	20.32
.003	0.08	0.47	1.19	.200	5.08	1.006	25.55
.005	0.13	.060	1.52	.312	7.92	1.305	33.15
.016	0.41	.062	1.57	.320	8.13	1.437	36.50
.030	0.76	.069	2.26	.370	9.40	1.645	41.78
				.400	10.16	2.640	


FIGURE 1. Dimensions and configuration.

AMSC N/A

FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.

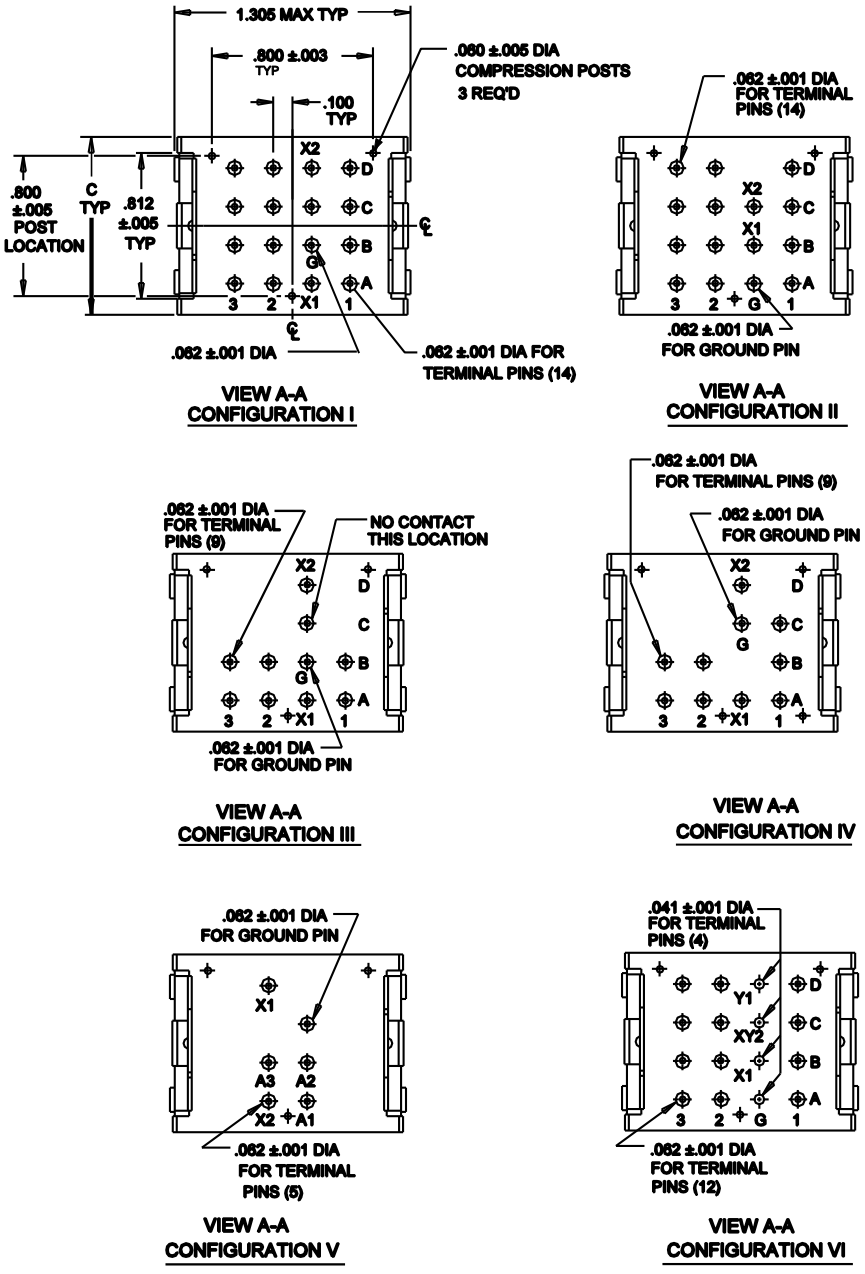

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 inch (0.25 mm).
4. Terminal markings shall be of a contrasting color to the socket surface and shall appear on both the bottom and top surface per the applicable specification.
5. Color code, top surface of socket per table I.

FIGURE 1. Dimensions and configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

TABLE I. Dimensions. 1/ 2/ 3/

Configuration	A Max	B Max	C Max	D Max
I	2.520 (64.01)	1.540 (39.12)	1.005 (25.53)	1.326 (33.68)
II	2.520 (64.01)	1.540 (39.12)	1.005 (25.53)	1.326 (33.68)
III	3.320 (84.33)	2.340 (59.44)	1.020 (25.91)	2.123 (53.92)
IV	3.320 (84.33)	2.340 (59.44)	1.020 (25.91)	2.123 (53.92)
V	3.320 (84.33)	2.340 (59.44)	1.020 (25.91)	2.123 (53.92)
VI	2.520 (64.01)	1.540 (39.12)	1.005 (25.53)	1.326 (33.68)

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only.
3/ Metric equivalents are in parenthesis.

Material:

Reference material: (see 3.1.1 of MIL-PRF-12883)

Body: Ultem or equivalent.

Bracket: 17-7 ph cres.

Plating: Sulfamate nickel per QQ-N-290, or an equivalent industry standard, 100 microinches minimum.

Grommet: Silicone rubber.


Contacts:

Use M39029/57-357 for 20 gauge (.041) terminal pins.
Use M39029/57-358 for 16 gage (.062) terminal/ground pins.
(Neither contact is supplied with the socket module.)

Minimum holding force: 3 lbs (13.34 Newton) when assembled to track (MIL-S-12883/49).

Part or identifying number (PIN): The PIN shall consist of the basic number of this specification sheet and the dash number from table II.

Example

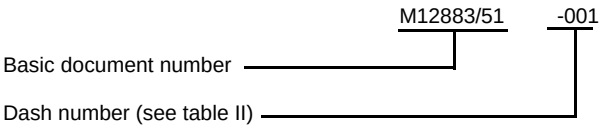

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.

TABLE II. Dash number and characteristics.1/

Dash number 2/	Socket Configuration	Applicable relay 2/ 3/	Maximum weight Pounds (grams)	Color Code FED-STD-595
001	I (dc)	MIL-R-83536/16-025	.045 (20.41)	Black 37038
002	II (ac)	MIL-R-83536/17-010	.045 (20.41)	Gray 36231
003	III (td-op)	MIL-R-83726/19	.081 (36.70)	Blue 35240
004	IV (tr-rel)	MIL-R-83726/18	.081 (36.70)	Green 34449
005	V (td voltage sensing)	MIL-R-83726/27	.115 (52.10)	Orange 32246
006	VI (dc latching)	MIL-R-83536/19-010	.045 (20.41)	Brown 30252

1/ Reference MIL-R-83536 for supersession data on MIL-R-6106 relays.
2/ To be used in conjunction with relay mounting track MIL-S-12883/49 and applicable relay.
2/ Each socket module delivered shall have a hole pattern that:
  a. Permits installation of the mating relay into the socket module when the relative orientation of the two is correct.
  b. Prevents installation of this mating relay into the socket module when the relative orientation of the two is not correct.
  c. Prevents installation of all other relays into the socket module regardless of the orientation of the socket module and the relay.
3/ Any hole molded into the socket module that results in a pattern that is not consistent with 2/ shall be filled. The filling means shall:
  a. If a non-metal, be proved to comply with the reversion resistance and hydrolytic stability requirements of MIL-STD-454, requirement 47.
  b. Be restrained from motion relative to the module material into which it is inserted.
  c. Have a hardness comparable to that of the module material into which it is inserted.

SUPERSESSION DATA: See table III.

TABLE III. Supersession data. 1/

Superseded dash number M6106/5-	Superseding PIN
001	M12883/51-001
002	M12883/51-002
003	M12883/51-003
004	M12883/51-004
005	M12883/51-005
006	M12883/51-006

1/ For Government logistics support, supersession data becomes applicable when a qualified products list becomes available.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.

The Government PIN, specified in table iv, supersedes the following commercial part numbers.

TABLE IV. Supersession and cross reference.

Active Government PIN	Superseded manufacturers part number
	CAGE 99699
M12883/51-001	BSE410-9
M12883/51-002	BSE410-10
M12883/51-003	BSCTD210-11
M12883/51-004	BSCTD210-12
M12883/51-005	BSCVSTD410-13
M12883/51-006	BSEL410-2

CONCLUDING MATERIAL

Custodian:
Navy - EC
Army - CR
Air Force - 85

Review activities:
Air Force - 99
Army - MI

Preparing activity:
DLA - ES

(Project number 5935-4015-13)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.