INCH-POUND

MIL-DTL-12883/51B
18 February 2003
SUPERSEDING
MIL-PRF-12883/51A
28 June 1996

DETAIL SPECIFICATION SHEET

SOCKETS AND ACCESSORIES FOR PLUG-IN ELECTRONIC COMPONENTS, BRACKET AND SOCKET ASSEMBLY FOR RELAYS, 4-POLE, 10 AMPERES
(MIL-PRF-6106, MIL-PRF, 83536, AND MIL-PRF-83726)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein
shall consist of this specification and MIL-DTL-12883.

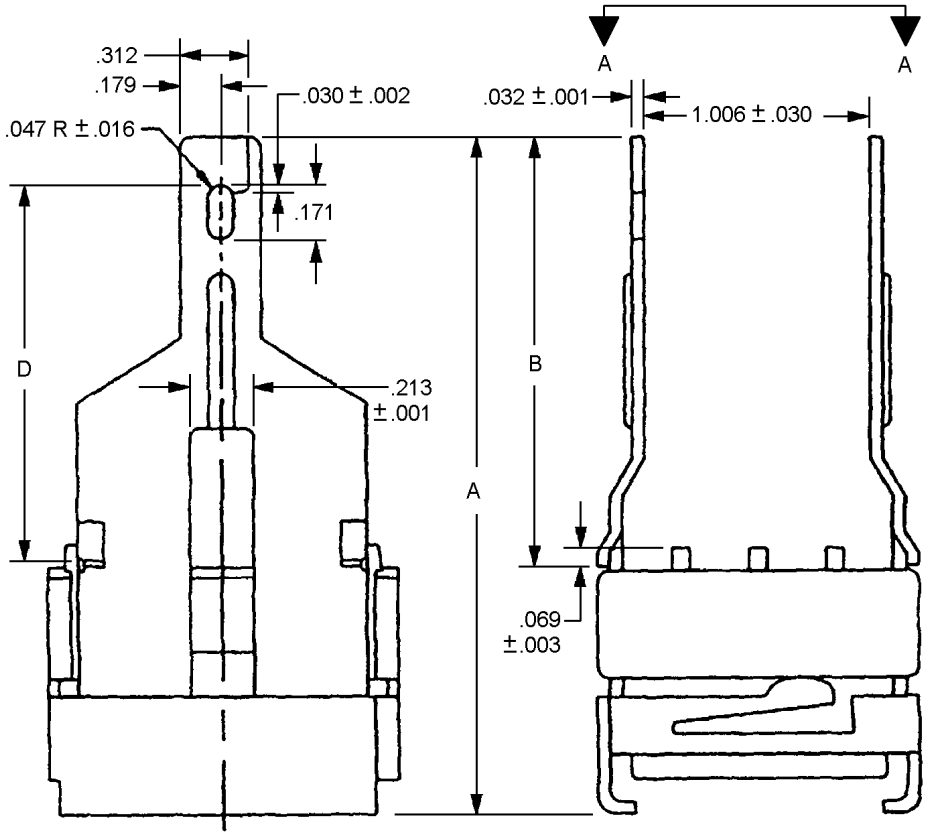


FIGURE 1. Dimensions and configurations.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.

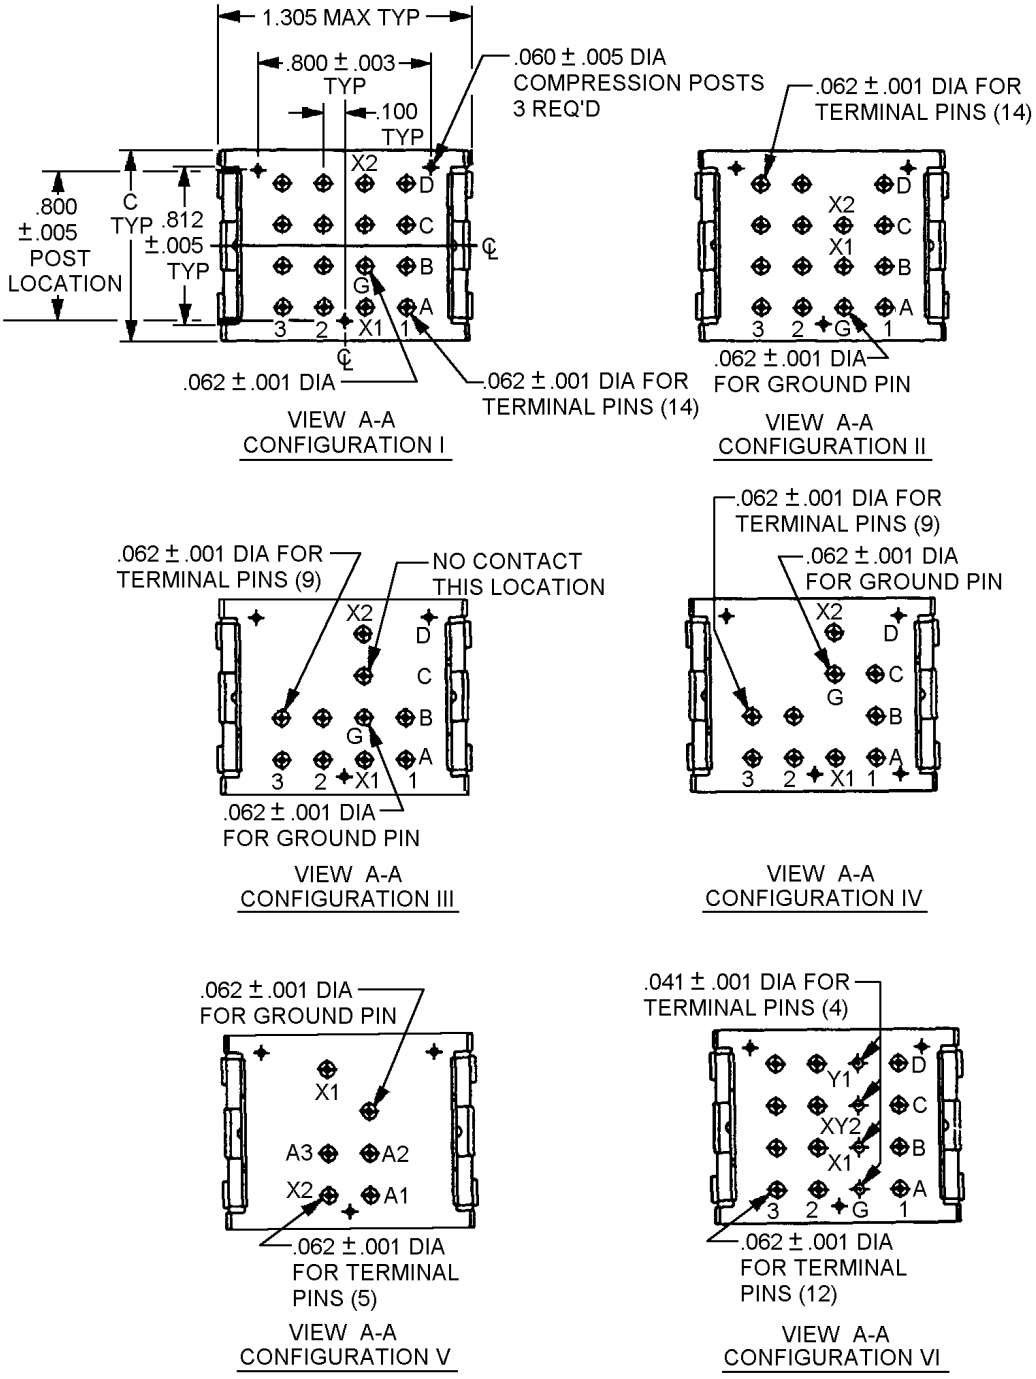


FIGURE 1. Dimensions and configurations – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.030	0.76	.062	1.57	.213	5.41
.002	0.05	.032	0.81	.069	1.75	.312	7.92
.003	0.08	.041	1.04	.100	2.54	.800	20.32
.005	0.13	.047	1.19	.171	4.34	.812	20.63
.016	0.41	.060	1.52	.179	4.55	1.006	25.54
						1.305	33.15

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ± .010 inch (0.25 mm).
4. Terminal markings shall be of a contrasting color to the socket surface and shall appear on both the bottom and top surface per the applicable specification.
5. Color code, top surface of socket in accordance with table I.

FIGURE 1. Dimensions and configurations – Continued.

REQUIREMENTS:

Dimensions and configurations: See figure 1 and table I.

TABLE I. Dimensions. 1/ 2/ 3/

Configuration	A Max	B Max	C Max	D Max
I	2.520 (64.01)	1.540 (39.12)	1.005 (25.53)	1.326 (33.68)
II	2.520 (64.01)	1.540 (39.12)	1.005 (25.53)	1.326 (33.68)
III	3.320 (84.33)	2.340 (59.44)	1.020 (25.91)	2.123 (53.92)
IV	3.320 (84.33)	2.340 (59.44)	1.020 (25.91)	2.123 (53.92)
V	3.320 (84.33)	2.340 (59.44)	1.020 (25.91)	2.123 (53.92)
VI	2.520 (64.01)	1.540 (39.12)	1.005 (25.53)	1.326 (33.68)

1/ Dimensions are in inches.
2/ Metric equivalents are given for general information only.
3/ Metric equivalents are in parenthesis.

Material:

Body: Polyetherimide.

Bracket: 17-7 ph cres passivated in accordance with SAE AMS QQ-P-35.

Plating: Sulfamate nickel in accordance with SAE-AMS-QQ-N-290, 100 microinches minimum.

Grommet: Silicone rubber.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.

Contacts: Contacts are not supplied with the socket module use the following contacts:

20 gage - M39029/57-357 for (.041) terminal pins.
16 gage - M39029/57-358 for (.062) terminal/ground pins.

Minimum holding force: 3 lbs (13.34 Newton) when assembled to track (MIL-DTL-12883/49).

Part or Identifying Number (PIN): The PIN shall consist of the basic number of this specification sheet and the dash number from table I.

Example

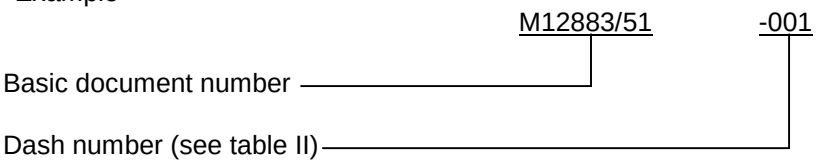


TABLE I. Dash number and characteristics. 1/

Dash number 2/	Socket configuration	Applicable relay 2 / 3/	Maximum weight pounds (grams)	Color code FED-STD-595
001	I (dc)	MIL-PRF-83536/16-025	.045 (20.41)	Black 37038
002	II (ac)	MIL-PRF-83536/17-010	.045 (20.41)	Gray 36231
003	III (td-op)	MIL-PRF-83726/19	.081 (36.70)	Blue 35240
004	IV (tr-rel)	MIL-PRF-83726/18	.081 (36.70)	Green 34449
005	V (td voltage sensing)	MIL-PRF-83726/27	.115 (52.10)	Orange 32246
006	VI (dc latching)	MIL-PRF-83536/19-010	.045 (20.41)	Brown 30252

1/ Reference MIL-PRF-89536 for supersession data on MIL-PRF-6106 relays.
2/ To be used in conjunction with relay mounting track MIL-DTL-12883/49 and applicable relay.
3/ Each socket module delivered shall have a hole pattern that:
   a. Permits installation of the mating relay into the socket module when the relative orientation of the two is correct.
   b. Prevents installation of this mating relay into the socket module when the relative orientation of the two is not correct.
   c. Prevents installation of all other relays into the socket module regardless of the orientation of the socket module and the relay.
4/ Any hole molded into the socket module that results in a pattern that is not consistent with 3/ shall be filled. The filling means shall exhibit the following characteristics:
   a. If a nonmetal, the fill material shall be proved to comply with the reversion resistance and hydrolytic stability requirements of MIL-HDBK-454, requirement 47.
   b. Shall be restrained from motion relative to the module material into which it is inserted.
   c. Shall have hardness comparable to that of the module material into which it is inserted.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.

Supersession data: See table III.

TABLE III. Supersession data. 1/

Superseded dash number	Superseding PIN
M6106/5-001	M12883/51-001
M6106/5-002	M12883/51-002
M6106/5-003	M12883/51-003
M6106/5-004	M12883/51-004
M6106/5-005	M12883/51-005
M6106/5-006	M12883/51-006

1/ For Government logistics support, supersession data becomes applicable when a qualified products list becomes available.

The Government PIN, specified in table III, supersedes the following commercial PINs.

TABLE III. Supersession and cross reference.

Active Government PIN	Superseded manufacturers PIN
	CAGE 99699
M12883/51-001	BSE410-9
M12883/51-002	BSE410-10
M12883/51-003	BSCTD210-11
M12883/51-004	BSCTD210-12
M12883/51-005	BSCVSTD410-13
M12883/51-006	BSEL410-2

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Army - MI
Air Force - 99

Preparing activity:
DLA - CC

(Project 5935-4344-16)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:37Z
Check the source to verify that this is the current version before use.