INCH-POUND

MIL-PRF-12883/53A
28 June 1996
SUPERSEDING
MIL-S-12883/53
24 July 1992

PERFORMANCE SPECIFICATION SHEET

SOCKETS AND ACCESSORIES FOR PLUG-IN ELECTRONIC COMPONENTS,
MOUNTING TRACK, FOR SOCKETS AND ELECTROMAGNETIC RELAYS

This specification is approved for use by all Departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-PRF-12883.

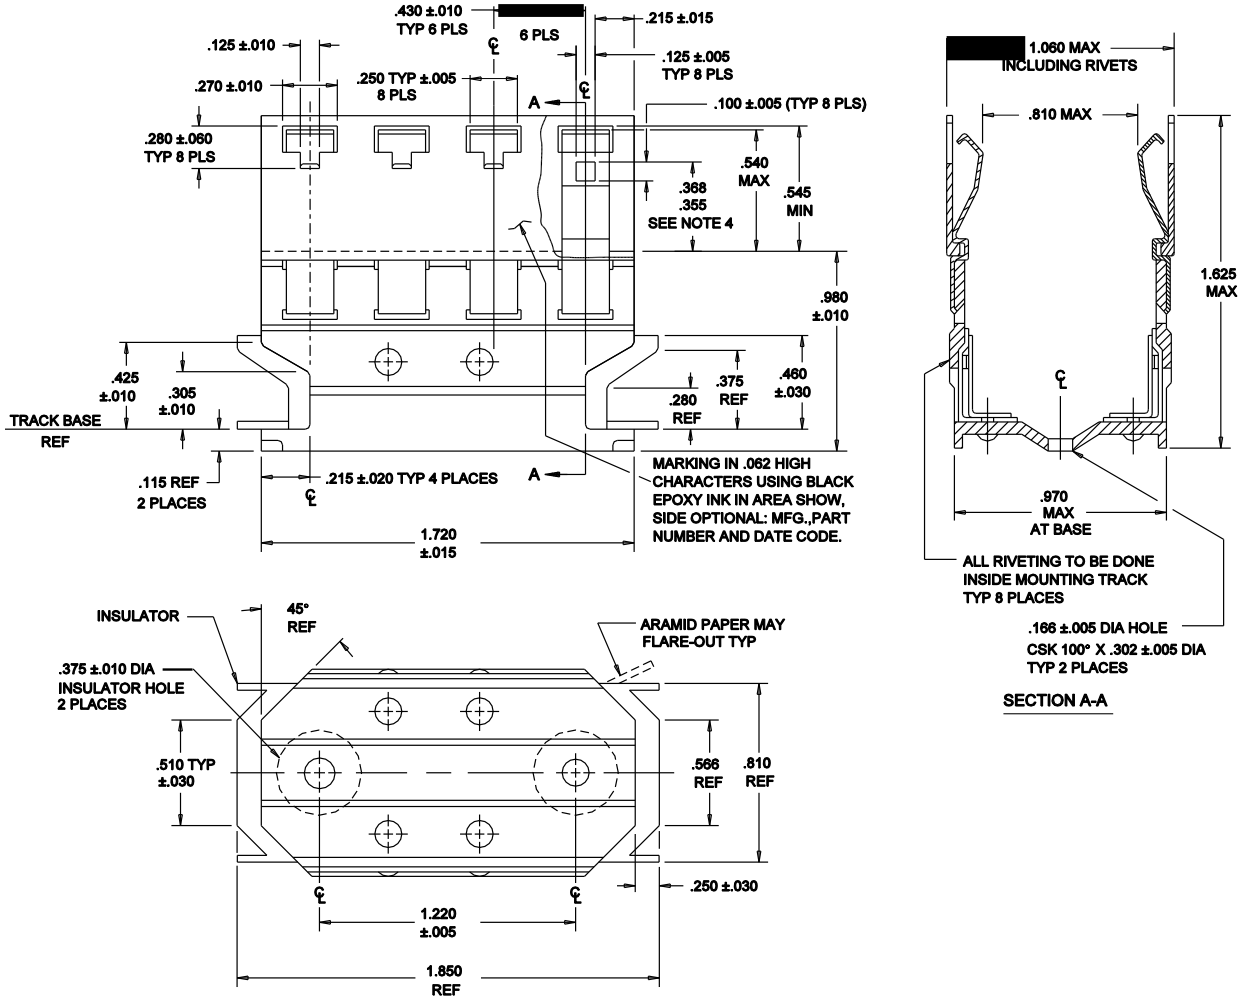


FIGURE 1. Mounting tracks

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:38Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm
.005	0.13	.270	6.86	.510	12.92
.015	0.38	.302	7.67	.540	13.72
.020	0.51	.305	7.75	.545	13.84
.100	2.54	.340	8.60	.810	20.84
.125	3.18	.355	9.02	.970	24.64
.154	3.91	.368	9.35	.980	24.89
.185	4.70	.375	9.53	1.060	26.92
.215	4.46	.425	10.80	1.220	30.99
.220	5.60	.430	10.92	1.625	41.28
.250	6.35	.460	10.68	1.720	43.69

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.010 (0.25 mm) for three place decimals and ±.030 (0.80 mm) for two place decimals.
4. When measured at .810 (20.57 mm) openings of clips.
5. Inner bracket and outer track shall be riveted together at eight places (4 side 4 bottom). The rivet projection shall not extend beyond the edges of the track (1.060 inch (26.92 mm) maximum).
6. Wiring protector shall extend beyond all metal edges as shown .05 inch (1.27 mm) minimum, .08 inch (2.03 mm) maximum and shall be bonded to the inner bracket with an adhesive that will meet the temperature range indicated in MIL-R-6101.

FIGURE 1. Mounting track - Continued.

REQUIREMENTS:

Design and construction: See figure 1.

Reference material: (see 3.1.1 of MIL-PRF-12883)

Outer track: The material shall be aluminum alloy (extruded) in accordance with QQ-A-225 or equivalent; finish, irradiate chemical conversion coating in accordance with MIL-C-5541, class 3.

Inner bracket and rivets: The material shall be corrosion resistant steel in accordance with QQ-S-766 or equivalent; finish, passivate in accordance with QQ-S-35, QQ-P-5002, MIL-F-14072 E300 or equivalent.

Latch: The material shall be beryllium copper alloy number C17200 in accordance with ASTM-B-194, heat treated to minimum temper of ASTM-TH01.

Wiring protector: The material shall be an aramid paper, in accordance with MIL-I-24202, type II, .010 inch (0.25 mm) thickness; finish, none.

Mating sockets: M12883/52-001, -002, and -003.

Operating temperature: -70° C to +125° C.

Weight: .845 ounce (24 grams) maximum.

Application data:


With relays mated to sockets attached to the mounting track assembly, the assembly shall meet the applicable mechanical, environmental, and electrical requirements of the applicable relay specifications.

Use tool M6106/32-001 to remove M12883/52 sockets.
Use tool M6106/31-001 to remove relays from this mounting bracket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:38Z
Check the source to verify that this is the current version before use.

PIN: The PIN shall be marked on the mounting track as shown in the example (see figure 1). The PIN shall consist of the basic number of this specification sheet and the dash number.

Example

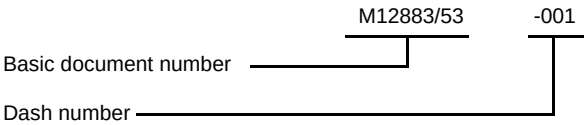

SUPERSESSION DATA: See table I.

TABLE I. Supersession data. 1/

Superseded dash number M6106/25-	Superseding PIN
001	M12883/53-001
002	M12883/53-001
003	M12883/53-001

1/ For Government logistics support, supersession data becomes applicable when a qualified products list becomes available.

The Government PIN, specified in table II, supersedes the following commercial part numbers.

TABLE II. Supersession and cross reference.

Active Government PIN	Superseded manufacturers part number
	CAGE 58982
M12883/53-001	RST145005

CONCLUDING MATERIAL

Custodian:
Navy - EC
ARMY - CR
Air Force - 85

Review activity:
Air Force - 99
Army - MI

Preparing activity:
DLA - ES

(Project 5935-4015-15)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:38Z
Check the source to verify that this is the current version before use.