MILITARY SPECIFICATION SHEET

(B) SOCKETS AND ACCESSORIES FOR PLUG-IN ELECTRONIC COMPONENTS
(TRANSISTOR, 2 CONTACT, 10 AMPERES, TØ-66)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the sockets and accessories described herein shall consist of this document and the latest issue of Specification MIL-S-12883.

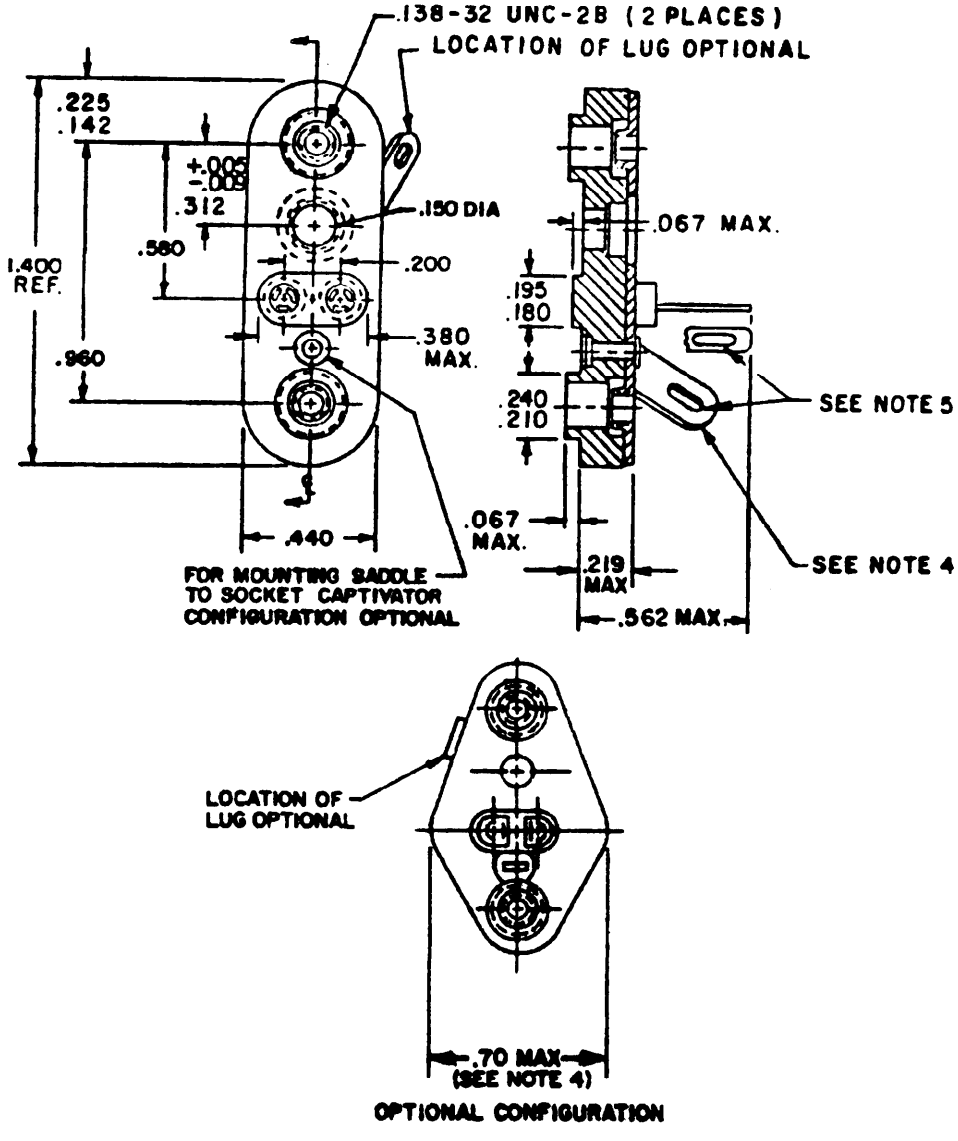


FIGURE 1. Socket configuration.

(B) denotes changes

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:34Z
Check the source to verify that this is the current version before use.

INCHES	MM	INCHES	MM	INCHES	MM
.005	.13	.195	4.95	.380	9.65
.009	.23	.200	5.08	.440	11.18
.067	1.70	.210	5.33	.562	14.27
.138	3.51	.219	5.56	.580	14.73
.142	3.61	.225	5.72	.70	17.8
.150	3.81	.240	6.10	.960	24.38
.180	4.57	.312	7.92	1.400	35.56

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are ±.005.
4. Lug shall be bent between 45 to 90 degrees and must remain in the confines of the .70 dimension and the 1.400 dimension.
5. Each contact tab shall have either 1 wire hole of .040 (1.02 mm) minimum width and .120 (3.05 mm) minimum length, or 2 holes of .040 (1.02 mm) minimum width and .075 (1.91 mm) minimum length. The hole or holes shall lie on the longitudinal centerline of the contact tab within ±.008 (.20 mm).

FIGURE 1. Socket configuration - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:34Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Material:
Insulator: Diallyl phthalate, green, per MIL-M-14, type SDG-F.
Contacts: Beryllium copper per QQ-C-533.
Contact finish: See table I.
(B) Mounting saddle and eyelet (use of eyelet optional): Brass per QQ-B-626 or QQ-B-613, plated tin-lead, 50 to 95 percent tin per MIL-P-81728.

Minimum thread strength (torque): 6 inch-pounds.

Contact clearance: Clearance between the cavity wall and the contact, with the contact in any position, shall be such that a 0.028 inch round nose pin with a force of 5 pounds will not penetrate between the cavity and contact.

Application: Sockets to accept components with 0.030, +.004 -.002 inch diameter leads.

(B) Float: With a pin of 0.034 inch diameter and .271 inch minimum length fully inserted in a socket contact, the contact shall be capable of free movement (float) within the contact cavity.

Insertion and withdrawal force: On the insertion and withdrawal of the mating component and socket, the insertion and withdrawal forces of the socket and mating component shall be as follows:
Insertion force - 6.00 pounds, maximum.
Withdrawal force - 0.18 pound, minimum; 6.00 pounds, maximum.

Insulation resistance: 1,000 megohms, minimum.
(Test pin diameter - 0.030, +.004 -.002 inch.)

Dielectric withstanding voltage:
Sea level - Test voltage, 1,500 Vrms.
(Test pin diameter - 0.030, +.004 -.002 inch.)
High altitude (80,000 feet) - Test voltage, 500 Vrms.
(Test pin diameter - 0.030, +.004 -.002 inch.)

Vibration: Sockets shall meet the requirements of method 204, test condition B, MIL-STD-202 (10-2,000 Hz) with a power transistor inserted for use as a test gage.

Contact resistance:
Average for all contacts - 0.015 ohm, maximum.
Individual contacts - 0.03 ohm, maximum.

Mechanical shock: Sockets shall meet the shock requirements specified in MIL-S-12883 with a mating power transistor for use as a test gage.

(B) Durability (50 cycles): After the durability test, the insertion force and withdrawal force shall be 6 pounds, maximum and .125 pound, minimum.

Weight (maximum): .10 pound, excluding hardware.

Test gage details: See table II and MIL-S-12883.

Marking: Sockets shall be marked on the side or the top surface.

Part number: M12883/43- (and dash number from table I).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:34Z
Check the source to verify that this is the current version before use.

Ⓑ TABLE I. Dash numbers and contact finish.

Dash number	Contact engagement area and termination finish
-01	Gold plating in accordance with MIL-S-12883
-02	Tin-lead plating, 50 to 95% tin in accordance with MIL-P-81728 (.000100 - .000300 inch)

Ⓑ TABLE II. Test-gage details.

Inspection	A (Pin length)	B (Pin dia)	M (Test-end dia)	C (Pin center to center)	N (Probe-end dia)	Total weight of gage (±5%)
	Inch	Inch	Inch	Inch	Inch	Ounces
Insertion and withdrawal force 1/	.150 min	0.0280 ±0.0001		.200 basic		
Contact resistance 2/	.150 min	0.0280 ±0.0001		.200 basic		
Contact retention 3/	.150 min		0.0280 ±0.0001		0.0340 ±0.0001	2
Durability 1/	.150 min	0.0340 ±0.0001		.200 basic		

1/ Test-gage shall be similar in construction to figure 1C, MIL-S-12883.
2/ Contact resistance shall be measured using a brass jumper having pin length, diameter and center-to-center spacing as shown. The test leads shall be attached to the terminals as close to the socket body as possible.
3/ See figure 4, MIL-S-12883.

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, AR, ME, AT, AV, ER
Navy - SH
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, WC
Navy - MC, AS, OS, CG
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-3348)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:34Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-62883/4373	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:34Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY
HQ, CECOM
ATTN: DRSEL-ED-TO
Ft. Monmouth, NJ 07703

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Communications-Electronics Command
ATTN: DRSEL-ED-TO
Ft. Monmouth, NJ 07703

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T23:34Z
Check the source to verify that this is the current version before use.