
MILITARY SPECIFICATION SHEET

CLIP, CRYSTAL HOLDER

The complete requirements for procuring the clip described herein shall consist of this document and the latest issue of Specification MIL-C-24066.

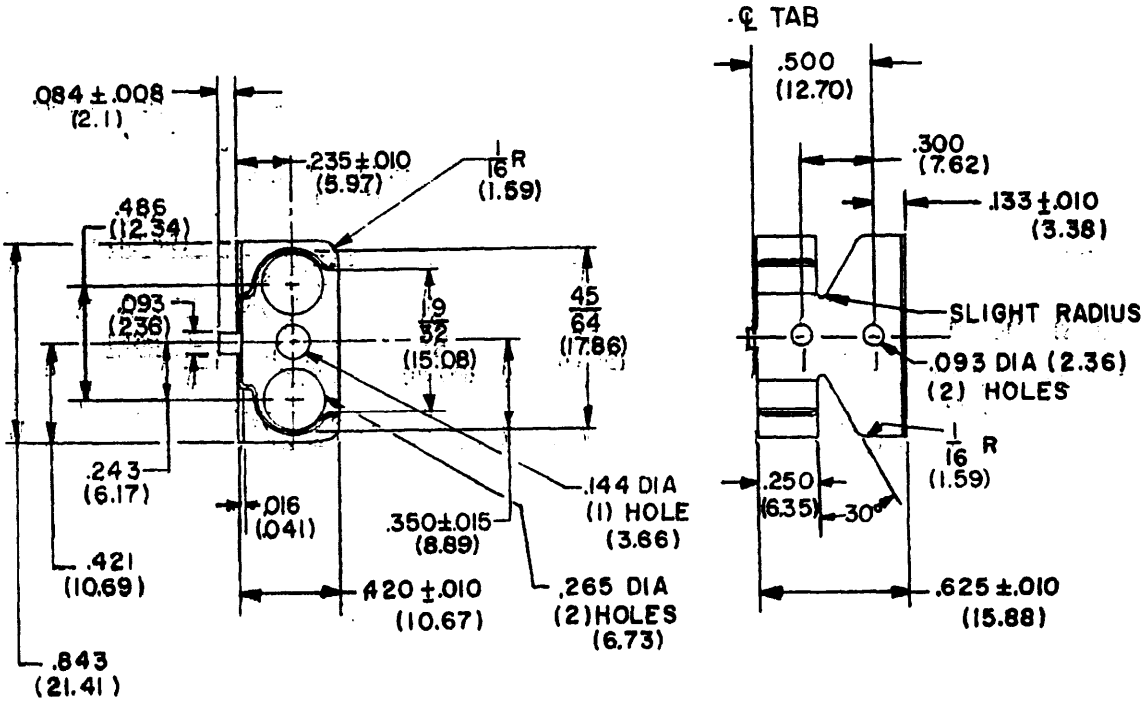

NOTES:

1. Dimensions in inches.
2. Tolerances unless otherwise specified herein, decimals: ± 0.005, fractions: ± 1/64, angles: ± 1 degree.
3. Metric dimensions in parentheses are shown on figure for general information only and are based 1 inch = 25.4 mm.

1/CHANGES FROM PREVIOUS ISSUE. THE OUTSIDE MARGINS OF THIS DOCUMENT HAVE BEEN MARKED "#" TO INDICATE WHERE CHANGES (DELETIONS, ADDITIONS, ETC.) FROM THE PREVIOUS ISSUE HAVE BEEN MADE. THIS HAS BEEN DONE AS A CONVENIENCE ONLY AND THE GOVERNMENT ASSUMES NO LIABILITY WHATSOEVER FOR ANY INACCURACIES IN THESE NOTATIONS. BIDDERS AND CONTRACTORS ARE CAUTIONED TO EVALUATE THE REQUIREMENTS OF THIS DOCUMENT BASED ON THE ENTIRE CONTENT AS WRITTEN IRRESPECTIVE OF THE MARGINAL NOTATIONS AND RELATIONSHIP TO THE LAST PREVIOUS ISSUE.

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material: Beryllium copper alloy 25 in accordance with Specification QQ-C-533 heat treated 15N-73-79 with anti-rotate tab.
2. Application: Shall mate with style 0205 ceramic crystal socket per Specification MIL-S-12883/4.

PART NUMBER:

M24066/1-001

Preparing activity:
Navy - SH
(Project 5340-N093Sh)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.