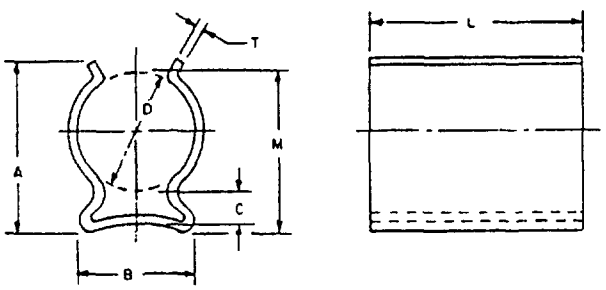
MILITARY SPECIFICATION SHEET

CLIP, SOLID, SPRING TENSION

This specification sheet is approved for use by the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the clip described herein shall consist of this document and the latest issue of Specification MIL-C-24066.






FIGURE 1




FIGURE 2




FIGURE 3

NOTES: 1. All dimensions are in inches.
2. Tolerances are not cumulative.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.

(E) Denotes change

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, Space and Naval Warfare Systems Command (SPAWAR 003-121), Washington, DC 20363-5100, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document, or by letter.

AMSC N/A

FSC 5340

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.

Requirements:

1. All dimensions are with clip secured to a flat surface with part inserted:

Part number	Part number	D 1/ ±0.010	L Length ±0.010	H MTG Hole ±0.003	T Material thick-ness ±0.003	A ±0.020	B ±0.020	C Min.	E ±0.010	F ±0.005	G ±0.005	M Max.	Superseded part number	Superseded part number
Spring Steel	Copper Beryllium	FIGURE 1 Ⓔ											Spring steel	Copper Beryllium
Cadmium Plated	Cadmium Plated												Cadmium Plated	Cadmium Plated
M24066/2-301	M24066/2-201	0.175	0.250	0.071	0 010	0.250	0.200	0.035	0.125	--	--	0.230	M24066/2-101	M24066/2-001
M24066/2-302	M24066/2-202	.195	.250	.071	.012	.270	.220	.035	.125	--	--	0.250	M24066/2-102	M24066/2-002
M24066/2-303	M24066/2-203	.195	.312	.093	.012	.270	.220	.040	.156	--	--	0.250	M24066/2-103	M24066/2-003
M24066/2-304	M24066/2-204	.235	.312	.071	.012	.320	.260	.040	.156	--	--	0.300	M24066/2-104	M24066/2-004
M24066/2-305	M24066/2-205	.260	.250	.093	.012	.340	.280	.035	.125	--	--	0.320	M24066/2-105	M24066/2-005
M24066/2-306	M24066/2-206	.260	.500	.093	.012	.340	.280	.035	.250	--	--	0.320	M24066/2-106	M24066/2-006
M24066/2-307	M24066/2-207	.312	.312	.093	.012	.380	.340	.040	.156	--	--	0.360	M24066/2-107	M24066/2-007
M24066/2-308	M24066/2-208	.375	.375	.093	.012	.450	.400	.040	.187	--	--	0.430	M24066/2-108	M24066/2-008
M24066/2-309	M24066/2-209	.400	.500	.103	.020	.500	.440	.045	.250	--	--	0.480	M24066/2-109	M24066/2-009
M24066/2-310	M24066/2-210	.500	.375	.093	.016	.600	.530	.050	.187	--	--	0.580	M24066/2-110	M24066/2-010
M24066/2-311	M24066/2-211	.562	.375	.093	.022	.690	.600	.080	.187	--	--	0.670	M24066/2-111	M24066/2-011
M24066/2-312	M24066/2-212	.875	1.000	.144	.028	1.100	.930	.105	.500	--	--	1.080	M24066/2-112	M24066/2-012
M24066/2-348	M24066/2-248	.195	.312	.103	.012	.270	.220	.040	.156	--	--	.250	-- --	-- --
M24066/2-349	M24066/2-249	.260	.250	.103	.012	.340	.280	.035	.125	--	--	.320	-- --	-- --
M24066/2-350	M24066/2-250	.260	.500	.103	.012	.340	.280	.035	.250	--	--	.320	-- --	-- --
M24066/2-351	M24066/2-251	.312	.312	.103	.012	.380	.340	.040	.156	--	--	.360	-- --	-- --
M24066/2-352	M24066/2-252	.375	.375	.103	.012	.450	.400	.040	.187	--	--	.430	-- --	-- --
M24066/2-353	M24066/2-253	500	.375	.103	.016	.600	.530	.050	.187	--	--	.580	-- --	-- --
M24066/2-354	M24066/2-254	.562	.375	.103	.022	.690	.600	.080	.187	--	--	.670	-- --	-- --

INS.	MM	INS.	MM	INS.	MM	INS.	MM	INS.	MM	INS.	MM
.010	0.25	.093	2.36	.210	5.33	.375	9.53	.562	14.27	.880	22.35
.012	0.30	.100	2.54	.216	5.54	.380	9.65	.580	14.73	.900	22.86
.016	0.41	.103	2.62	.220	5.59	.391	9.93	600	15.24	.920	23.37
.018	0.46	.105	2.67	.230	5.84	.400	10.16	.625	15.88	.930	23.62
.020	0.51	.109	2.77	.235	5.97	.410	10.41	.670	17.02	.937	23.80
.022	0.56	.110	2.79	.250	6.35	.420	10.67	.687	17.45	.938	23 83
.024	0.61	.120	3.05	.260	6.60	.430	10.92	.688	17.48		
.028	0.71	.125	3.18	.266	6.76	.437	11.10	.690	17.53		
.029	0.74	.128	3.25	.270	6.86	.438	11.13	.700	17.78		
.032	0.81	.130	3.30	.280	7.11	.440	11.18	.720	18.29		
.035	0.89	.144	3.66	.300	7.62	.450	11.43	.750	19.05		
.040	1.02	.156	3.96	.312	7.92	.460	11.68	.780	19.81		
.050	1.27	.162	4.11	.320	8.13	.468	11.89	.790	20.07		
.062	1.57	.175	4.45	.330	8.38	.469	11.91	.800	20.32		
.071	1.80	.187	4.75	.340	8.64	.480	12.19	.810	20.57		
.080	2.03	.195	4.95	.351	8.92	.500	12.70	.820	20.83		
.090	2.29	.200	5.08	.360	9.14	.530	13.46	.875	22.23		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.

Part number	Part number	D 1/ ±0.010	L Length ±0.010	H MTG Hole ±0.003	T Material thick-ness ±0.003	A ±0.020	B ±0.020	C Min.	E ±0.010	F ±0.005	G ±0.005	M Max.	Superseded part number	Superseded part number
Spring Steel	Copper Beryllium	FIGURE 2 (E)											Spring steel	Copper Beryllium
Cadmium Plated	Cadmium Plated												Cadmium Plated	Cadmium Plated
M24066/2-313	M24066/2-213	0.175	0.312	0.071	0.010	0.250	0.200	0.035	0.062	0.187	--	0.230	M24066/2-113	M24066/2-013
M24066/2-314	M24066/2-214	.175	.625	.071	.010	.250	.200	.035	.125	.375	--	.230	M24066/2-114	M24066/2-014
M24066/2-315	M24066/2-215	.195	.625	.071	.012	.270	.220	.035	.125	.375	--	.250	M24066/2-115	M24066/2-015
M24066/2-316	M24066/2-216	.235	.625	.093	.012	.320	.260	.040	.156	.312	--	.300	M24066/2-116	M24066/2-016
M24066/2-317	M24066/2-217	.260	.500	.093	.012	.340	.280	.035	.125	.250	--	.320	M24066/2-117	M24066/2-017
M24066/2-318	M24066/2-218	.312	.562	.093	.016	.380	.340	.040	.156	.250	--	.360	M24066/2-118	M24066/2-018
M24066/2-319	M24066/2-219	.312	.687	.093	.012	.380	.340	.040	.125	.437	--	.360	M24066/2-119	M24066/2-019
M24066/2-320	M24066/2-220	.312	.750	.093	.016	.380	.340	.040	.156	.437	--	.360	M24066/2-120	M24066/2-020
M24066/2-321	M24066/2-221	.375	.750	.103	.018	.460	.410	.035	.187	.375	--	.440	M24066/2-121	M24066/2-021
M24066/2-322	M24066/2-222	.391	.625	.093	.018	.480	.430	.050	.156	.312	--	.460	M24066/2-122	M24066/2-022
M24066/2-323	M24066/2-223	.400	.750	.103	.018	.500	.440	.050	.187	.375	--	.480	M24066/2-123	M24066/2-023
M24066/2-324	M24066/2-224	.500	.750	.128	.016	.600	.530	.050	.187	.375	--	.580	M24066/2-124	M24066/2-024
M24066/2-325	M24066/2-225	.562	.687	.128	.022	.690	.600	.080	.187	.312	--	.670	M24066/2-125	M24066/2-025
M24066/2-326	M24066/2-226	.562	1.000	.093	.022	.690	.600	.080	.187	.625	--	.670	M24066/2-126	M24066/2-026
M24066/2-327	M24066/2-227	.670	.500	.128	.016	.800	.700	.090	.125	.250	--	.780	M24066/2-127	M24066/2-027
M24066/2-328	M24066/2-228	.670	.750	.128	.016	.800	.700	.090	.187	.375	--	.780	M24066/2-128	M24066/2-028
M24066/2-329	M24066/2-229	.670	.937	.128	.016	.800	.700	.090	.250	.437	--	.780	M24066/2-129	M24066/2-029
M24066/2-330	M24066/2-230	.750	.750	.128	.020	.900	.790	.110	.187	.375	--	.880	M24066/2-130	M24066/2-030
M24066/2-331	M24066/2-231	.750	1.000	.156	.029	.920	.810	.109	.187	.625	--	.900	M24066/2-131	M24066/2-031
M24066/2-332	M24066/2-232	.750	1.250	.144	.029	.920	.810	.100	.250	.750	--	.900	M24066/2-132	M24066/2-032
M24066/2-333	M24066/2-233	.875	.750	.128	.028	1.100	.930	.110	.187	.375	--	1.080	M24066/2-133	M24066/2-033
M24066/2-334	M24066/2-234	.875	1.125	.144	.028	1.100	.930	.110	.250	.625	--	1.080	M24066/2-134	M24066/2-034
M24066/2-335	M24066/2-235	.875	2.000	.144	.028	1.100	.930	.110	.500	1.000	--	1.080	M24066/2-135	M24066/2-035
M24066/2-336	M24066/2-236	1.000	1.000	.144	.024	1.210	1.050	.130	.266	.468	--	1.190	M24066/2-136	M24066/2-036
M24066/2-347	M24066/2-247	.351	.625	.093	.012	.440	.330	.035	.125	.375	--	.420	M24066/2-147	M24066/2-047
M24066/2-355	M24066/2-255	.235	.625	.103	.012	.320	.260	.040	.156	.312	--	.300	-- --	-- --
M24066/2-356	M24066/2-256	.260	.500	.103	.012	.340	.280	.035	.125	.250	--	.320	-- --	-- --
M24066/2-357	M24066/2-257	.312	.562	.103	.016	.380	.340	.040	.156	.250	--	.360	-- --	-- --
M24066/2-358	M24066/2-258	.312	.687	.103	.012	.380	.340	.040	.125	.437	--	.360	-- --	-- --
M24066/2-359	M24066/2-259	.312	.750	.103	.016	.380	.340	.040	.156	.437	--	.360	-- --	-- --
M24066/2-360	M24066/2-260	.391	.625	.103	.018	.480	.430	.050	.156	.312	--	.460	-- --	-- --
M24066/2-361	M24066/2-261	.562	1.00	.103	.022	.690	.600	.080	.187	.625	--	.670	-- --	-- --
M24066/2-362	M24066/2-262	.351	.625	.103	.012	.440	.330	.035	.125	.375	--	.420	-- --	-- --

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.

Part number	Part number	D ±0 010	L Length ±0.010	H MTG Hole ±0 003	T Material thick-ness ±0.003	A ±0.020	B ±0.020	C Min.	E ±0.010	F ±0.005	G ±0.005	M Max.	Superseded part number	Superseded part number
Spring Steel	Copper Beryllium	FIGURE 3											Spring steel	Copper Beryllium
Cadmium Plated	Cadmium Plated												Cadmium Plated	Cadmium Plated
M24066/2-337	M24066/2-237	0.195	1.125	0.071	0.010	0 270	0.210	0.035	0.125	0.875	0.438	0.250	M24066/2-137	M24066/2-037
M24066/2-338	M24066/2-238	.375	1.125	103	018	.460	410	.035	.187	.750	.375	0.440	M24066/2-138	M24066/2-038
M24066/2-339	M24066/2-239	.400	1.125	.103	.020	.500	.440	.035	.187	.750	.375	0.480	M24066/2-139	M24066/2-039
M24066/2-340	M24066/2-240	.500	1.625	.128	.016	.600	.530	.050	.250	1.125	.562	0.580	M24066/2-140	M24066/2-040
M24066/2-341	M24066/2-241	.562	1.625	.128	.022	.690	.600	.080	.250	1.125	.562	0.670	M24066/2-141	M24066/2-041
M24066/2-342	M24066/2-242	.670	1.375	.128	.024	820	720	.090	.250	.875	.437	0.800	M24066/2-142	M24066/2-042
M24066/2-343	M24066/2-243	.750	2.000	.144	.029	.920	.810	.100	.250	1.500	.750	0.900	M24066/2-143	M24066/2-043
M24066/2-344	M24066/2-244	1.000	1.875	.144	.032	1.210	1.050	.120	.250	1.375	.688	1.190	M24066/2-144	M24066/2-044
M24066/2-345	M24066/2-245	1.125	1.375	.162	.032	1.340	1.190	.125	.218	.938	.469	1.320	M24066/2-145	M24066/2-045
M24066/2-346	M24066/2-246	1.250	2.000	.162	.032	1.350	1.310	.100	.250	1.500	.750	1.390	M24066/2-146	M24066/2-046

1/ Diameter of part for which clip is desired

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.

2. Material. Copper-beryllium alloy, cadmium plated conforming to QQ-P-416; spring steel, cadmium plated conforming to ASTM A 682, ASTM A 684, and QQ-P-416.

Review activity:
NAVY - AS

DLA - IS

Preparing activity
NAVY - EC

(Project 5340-N099)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

SPACE AND NAVAL WARFARE SYSTEMS COMMAND
WASHINGTON D C 20363-5100

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
SPACE AND NAVAL WARFARE SYSTEMS COMMAND
ATTN: SPAWAR 003-121
WASHINGTON, DC 20363-5100

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-24066/2E (EC)	CLIP, SOLID, SPRING TENSION

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil – Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.

NOTICE
OF VALIDATION

INCH-POUND

MIL-C-24066/2 Rev E
NOTICE 1
1 JULY 1994

MILITARY SPECIFICATION

CLIP, SOLID, SPRING TENSION

MIL-C-24066/2 Rev E dated 09-OCT-86 has been reviewed and determined to be valid for use in acquisition

Custodians
Navy - EC

Preparing activity.
DLA-IS

AMSC N/A

FSC 5340

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:54Z
Check the source to verify that this is the current version before use.