MIL-G-36645A
Amendment-1
18 February 1981

MILITARY SPECIFICATION

GOWN, HOSPITAL, COTTON

This amendment forms a part of military specification MIL-G-36645A, dated 5 June 1973, and is approved for use by all departments.

Page 1

In title: After "Cotton", add "-Polyester, Universal size".

1.1 SCOPE., Line 1: After "Cotton" add "-Polyester".

2.1 Specifications: Under "Federal" delete "QQ-5-766".

Page 3

Table I, Physical requirements: Delete entirely, and substitute the following:

"Table I. PHYSICAL REQUIREMENTS

Weight OZ. SQ. YD. Minimum	Yarns per Inch Minimum		Breaking Strength Pounds Minimum	
	Warp	Filling	Warp	Filling
3.2	98	52	75	35

3.1.3.3 Color., Line 1: Delete "290" and substitute "201".

Page 4

3.1.5 Thread., Delete entirely and substitute: "3.1.5 Thread. The thread for seaming and stitching shall be polyester, cotton-covered, ticket no. 50, 2 ply and 70, 2 ply conforming to MIL-T-43548. Spun polyester thread, ticket No. 40 or 50, 2 or 3 ply and 70, 2 or 3 ply conforming to Class 1 or 2 of MIL-T-43624 may be substituted for the Polyester, Cotton-Covered Thread."

Add new subparagraph: "3.1.5.1 Color. The thread shall be dyed to approximate the shade of the base fabric."

3.1.6 Snap Fasteners., Delete entirely and substitute the following: "3.1.6 Snap Fasteners. The snap fasterners shall conform to MIL-F-10884, Style 3, except that the snap fasteners shall be fabricated from 300 series stainless steel."

FSC 6532

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:57Z
Check the source to verify that this is the current version before use.

Page 5

3.1.7.4 Laundering Instructions., Delete entirely.

Page 6

3.4 Patterns., At end of paragraph add: "The cloth shall be cut so that the bottom of the gown shall be the selvage edge."

Table II. List of pattern parts, add "1/" to "Sleeve" and at bottom of table add: "1/ sleeve may be cut in two pattern pieces."

Page 11

Table III manufacturing operations requirements, operation 6.a., at end of paragraph add: "If desired, the fourth side may be stitched."

Page 13

Operation 8, add new subparagraph: "g. Operations a. and b. may be deleted if sleeves are cut from two pattern parts."

Operation 8.c., at end of paragraph add: "The turn under shall be 3/8 to 1/2 inches wide."

Pages 12, 13, 14 Operation Nos. 8.b., 8.F. and 9.b., in the "stitch type" column add: "512".

Page 17

Table IV. Table of Measurements, "Sleeve Length" Column: Delete "6-1/2" and substitute "7".

Page 31

6.3 Samples., Line 1: Delete "Sample of the gown and".

6.4 and 6.5, delete entirely and substitute the following: "6.4 Catalog Information. This specification is intended to cover the following item appearing in the Federal Supply Catalog:

National Stock Number	Item Identification
6532-00-117-8247	Gown, Hospital, Durable Press, Universal Size, Each

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:57Z
Check the source to verify that this is the current version before use.

Add Figure 1 GOWN, HOSPITAL, PATIENT'S

Custodians:
Army-MD
Navy-MS
Air Force-03


Preparing Activity:
DoD-MB

Agent:
DLA-DM


Project No. 6532-1149

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:57Z
Check the source to verify that this is the current version before use.

AMENDMENT-1

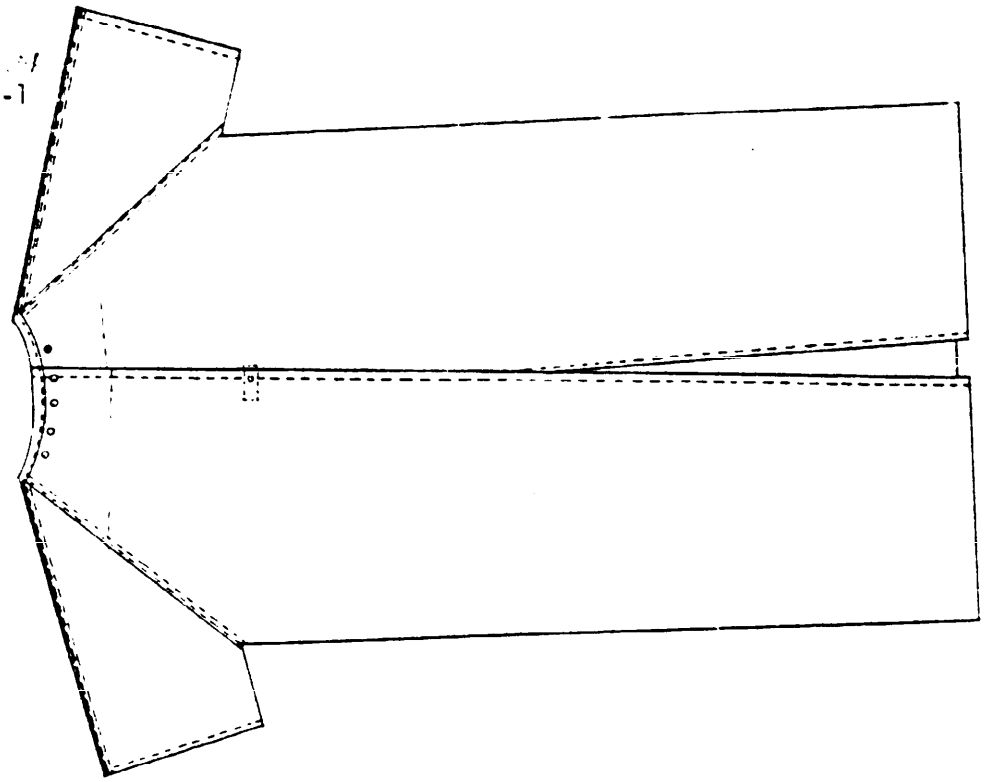

BACK

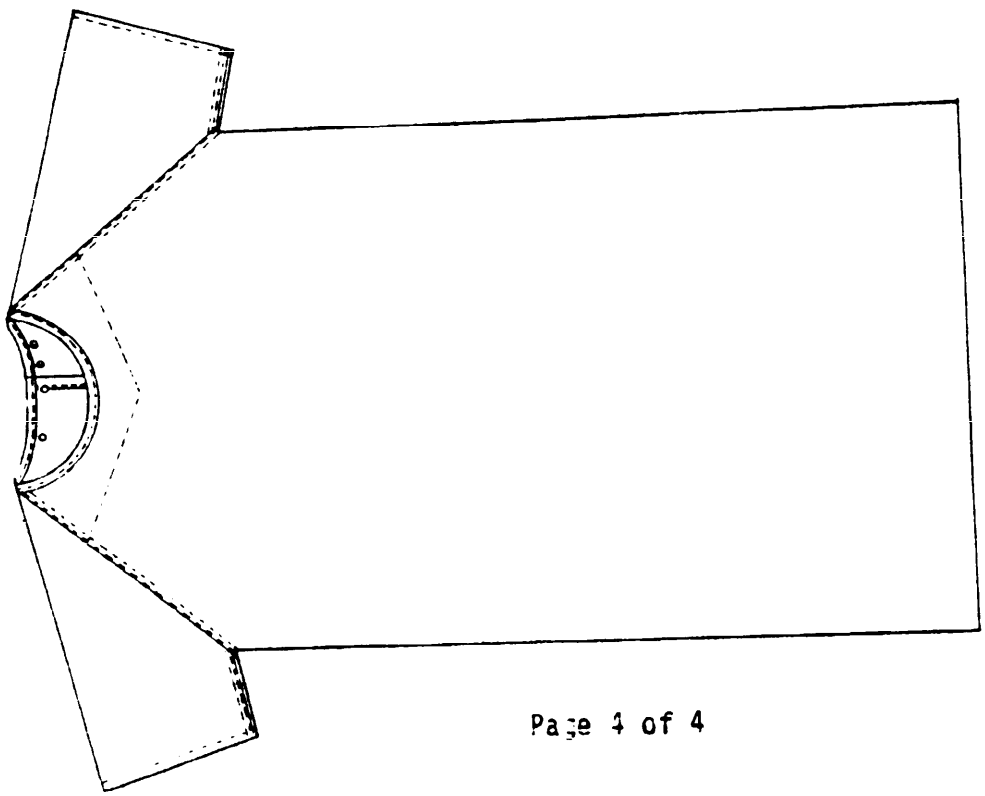

FRONT

FIGURE 1. GOWN, HOSPITAL, PATIENT'S

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:57Z
Check the source to verify that this is the current version before use.