MIL-P-36659
2 April 1970

MILITARY SPECIFICATION

PROBE, BULLET, FLUHRER, 8 Inch

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of bullet probe, of the Fluhrer design.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

GG-I-526	Instruments, Dental and Surgical; General Specifications
PPP-B-566	Boxes, Folding, Paperboard.
PPP-B-585	Boxes, Wood, Wirebound.
PPP-B-601	Boxes, Wood, Cleated-Plywood.
PPP-B-621	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	Box, Fiberboard.
PPP-B-676	Boxes, Set-Up.

Military

MIL-L-10547	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible.

FSC 6515

Source: https://assist.dla.mil -- Downloaded: 202640-21T08:58Z
Check the source to verify that this is the current version before use.

shall be packed in a appropriate size conforming to the require- nearest such multiple

STANDARDS

Military

MIL-STD-105 Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 Marking for Shipment and Storage.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 General requirements. The bullet probe shall be in accordance with the applicable requirements of GG-I-526, and as specified herein.

3.2 Material. The bullet probe shall be fabricated from class 3, copper, alloy number 110 or 122 in accordance with GG-I-526.

3.3 Style, design and dimensions. The style, design, and dimensions of the bullet probe shall be in accordance with Figure 1.

3.4 Finish. The finish shall be smooth and uniform in accordance with GG-I-526.

3.5 Corrosion resistance. Shall be in accordance with GG-I-526.

3.6 Identification marking. Shall be in accordance with GG-I-526.

3.7 Workmanship. Shall be in accordance with GG-I-526.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Shall be in accordance with GG-I-526.

4.1.1 Inspection. Shall be in accordance with GG-I-526.

4.1.2 Certificates of quality. Certificates of quality supplied by the manufacturer of the non-ferrous metal may be furnished in lieu of actual performance of such testing by the contractor, provided lot identity has been maintained and can be demonstrated to the government. The certificate shall include the name of the contractor, the contract number, the name of the manufacturer or supplier, the FSN, the item identification, the name of the component/material, the lot number, the lot size, the sample size, the date of testing, the test method, individual test results, and the specification requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:58Z
Check the source to verify that this is the current version before use.

4.2 Sampling.

4.2.1 For examination. Sampling for examination shall be conducted in accordance with MIL-STD-105. The inspection levels and acceptable quality levels shall be as indicated in Table I. The unit of product for examination shall be one bullet probe.

Table I. Sampling for Examination

Type of Defect	Inspection level	AQL (Percent defective)
Major	II	1.0
Minor	II	2.5

4.2.2 For tests. Sampling for tests shall be conducted in accordance with MIL-STD-105, and as indicated in Table II.

Table II. Sampling for Tests

Component (unit of product)	Characteristic	Req.	Test Procedure	Insp. level	AQL (percent defective)
1-Probe	Dimensions	3.3	--------	S-1	*
1-Probe	Boil Test	GG-I-526	GG-I-526	S-2	*

* Acceptance number shall be zero for all sample sizes.

4.2.3 Raw materials. Four ounces of each lot of each metal used in construction of the bullet probe shall be selected for chemical analysis.

4.2.4 Sample unit usage. Where possible, the same sample unit shall be used for the determination of two or more test characteristics.

4.3 Examination. Shall be in accordance with GG-I-526.

4.3.1 Classification of defects. Examination shall be conducted in accordance with MIL-STD-105 and the classification of defects specified in Table III. Inspection, however, shall not be restricted to the classified possible defects listed in Table III.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:58Z
Check the source to verify that this is the current version before use.

Table III. Classification of Defects

Categories	Defects
Critical	None defined.
Major	
101	Style and design not as specified.
102	Probes not free of sharp edges, rough areas, burrs, cracks, grind marks or overlaps.
Minor	
201	Identification marking not present, correct, complete, or legible.
202	Finish not as specified.

4.4 Tests. Tests shall be conducted to determine compliance with specification requirements in accordance with GG-I-526 and as specified herein.

5. PREPARATION FOR DELIVERY

5.1 Packaging.

5.1.1 Unit of issue. One probe, as specified, constitutes one unit of issue.

5.1.2 Packaging quantities. The number of units of issue indicated in Table IV shall be packaged in each unit, intermediate, and exterior container, as applicable, for the required level of protection specified in the procurement document.

Table IV. Packaging Quantities

Unit package	Intermediate package	Exterior container
1 unit	6 units	288 units

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:58Z
Check the source to verify that this is the current version before use.

5.1.2.1 Packing variation permitted. If the required number of units in the entire shipment is less than the number of units specified to be overpacked in an exterior container, such units may be packed in an exterior container of suitable size and design, acceptable to a common carrier, which shall insure safe delivery to destination.

5.1.3 Level A.

5.1.3.1 Cleaning and drying. Each unit shall be thoroughly cleaned and dried in accordance with the applicable method as outlined in MIL-P-116.

5.1.3.2 Preservative. Not required.

5.1.3.3 Intimate wrap. Each unit shall be wrapped in neutral tissue or other suitable anticorrosive materials.

5.1.3.4 Unit package. Each unit shall be packaged in accordance with MIL-P-116, method IA-8.

5.1.3.5 Intermediate package. Intermediate package shall be a box of appropriate size constructed in accordance with PPP-B-566, PPP-B-676 or PPP-B-636, class domestic. Commercial colors are acceptable on intermediate cartons and closure shall be adequate to prevent spilling of contents under normal handling.

5.1.4 Level C. Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose.

5.2 Packing.

5.2.1 Level A.

5.2.1.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-585, class 3; PPP-B-601, overseas type; PPP-B-621, class 2; or PPP-B-636, class weather-resistant, grade V3. Closure and strapping shall be as specified in the appendix of the applicable box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:58Z
Check the source to verify that this is the current version before use.

5.2.1.2 Case liner. Each Level A wood box shall be lined with a waterproof case liner conforming to MIL-L-10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto. Case liner shall not be required for fiberboard boxes.

5.2.2 Level B.

5.2.2.1 Exterior container. Exterior container shall be designed for a type 2 load and constructed in accordance with PPP-B-[illegible], class 1, style 3; PPP-B-601, domestic type, PPP-B-621, class 1; or PPP-B-[illegible]6, class domestic. Closure shall be as specified in the appendix of the applicable box specification.

5.2.2.2 Level B. The unit package shall be packed in fiberboard [illegible] containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 Interior packages. Each unit package and each intermediate package shall be marked in accordance with MIL-STD-129. When labels are utilized, waterproofing shall be required only when applicable carton is fabricated of water-resistant material. Contract or purchase order number and name of contractor shall be shown.

5.3.2 Exterior container. Exterior container shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The bullet probe, Fluhrer design, is intended to be used for determining the direction of sinus tracts and probing for foreign bodies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:58Z
Check the source to verify that this is the current version before use.

[illegible] shall be level A or C, as specified [illegible] 6.1 [illegible]

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(c) Federal stock number.

6.3 This specification is intended to cover the following item appearing in the Federal Supply Catalog: FSN 6515-356-7 OC PROBE, Bullet, Plunger, 5 Inch. It does not include all types, sizes, or grades as indicated by the title or all types which are commercially available.

6.4 Supersession data. This specification includes the requirements of Purchase Description No. 1, dated 19 March 1962.

Custodians:
Army - MD
Navy - MS
Air Force - 03


Review activities:
Army - MD
Navy - MS
Air Force - 03

Preparing activity:
Defense Supply Agency - DM

Project No. 6515-1190

Review information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:58Z
Check the source to verify that this is the current version before use.

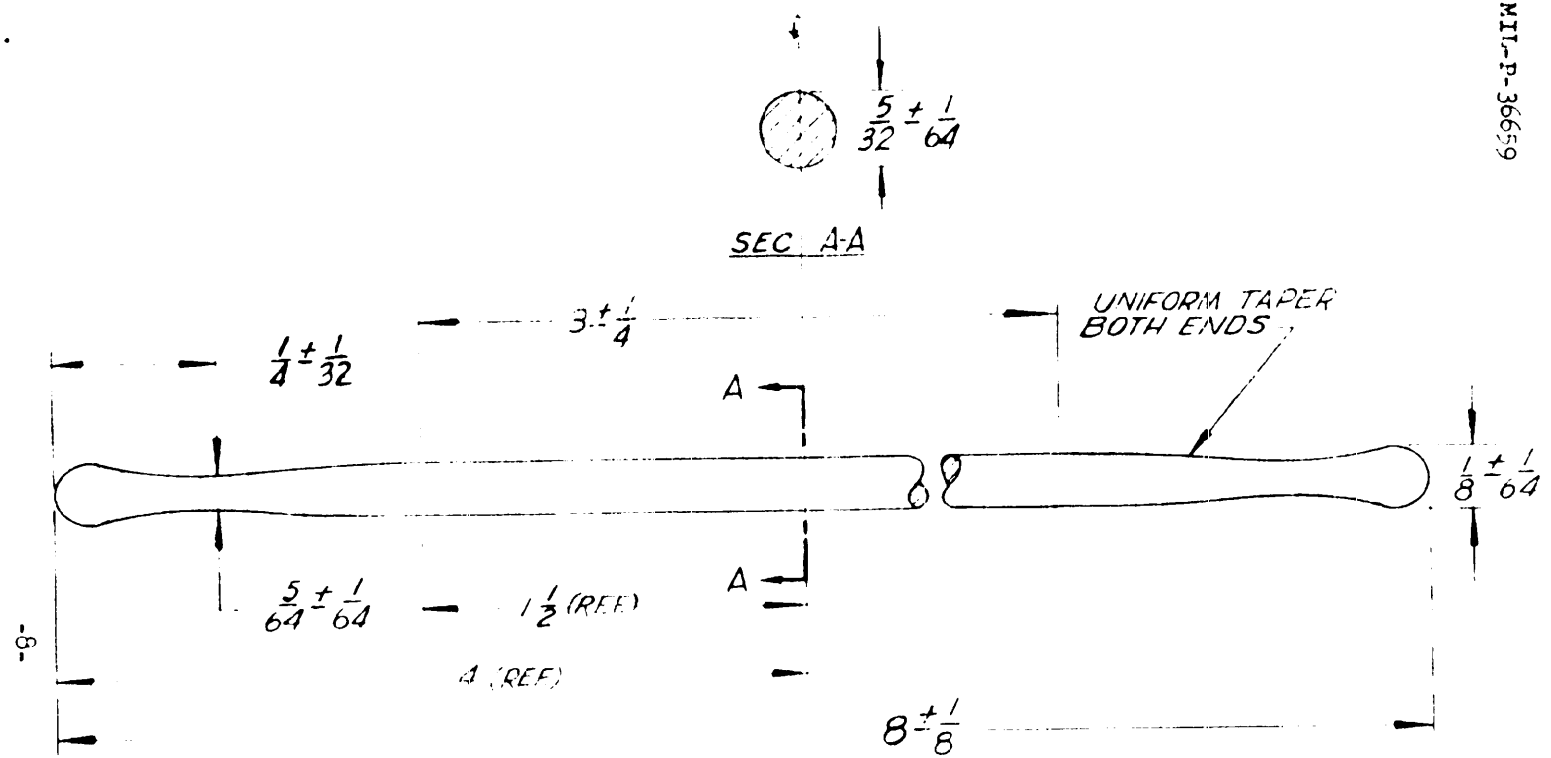

NOTE
TOLERANCES INDICATED DELINEATE ACCEPTABLE EXTREME DIMENSIONS AND ARE NOT INTENDED TO PERMIT VARIATIONS WITHIN A SINGLE INSTRUMENT WHICH WILL SACRIFICE UNIFORMITY SYMMETRY AND FIRST QUALITY WORKMANSHIP.

FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:58Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MIL-P-36659 FSN:

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO (If "yes", in what way?)

4. REMARKS (Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)

SUBMITTED BY (Printed or typed name and activity - Optional) | DATE

DD FORM 1426 REPLACES EDITION OF 1 OCT 64, WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T08:58Z
Check the source to verify that this is the current version before use.

CAUTION

NOTICE TO BIDDERS OFFERORS

DO NOT CONDITION OR BASE YOUR BID OFFER ON ANY CURRENT PROCUREMENT ON THE INFORMATION SUBMITTED ON THIS FORM SINCE ANY CHANGES OR DELETIONS IN THE SPECIFICATIONS MAY RENDER YOUR BID OFFER NON RESPONSIVE IN WHICH CASE IT CAN NOT BE CONSIDERED FOR AWARD.

Fold

DEFENSE PERSONNEL SUPPORT CENTER
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

HEADQUARTERS, DEFENSE PERSONNEL SUPPORT CENTER
ATTN: DIRECTORATE OF MEDICAL MATERIEL, CODE ATT
2800 SOUTH 20TH STREET
PHILADELPHIA, PA 19101

Fold

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T08:58Z
Check the source to verify that this is the current version before use.