INCH-POUND

MIL-DTL-8789/1
15 August 2019

DETAIL SPECIFICATION SHEET

FITTING END, STRAIGHT, ATTACHABLE, MONEL, HIGH PRESSURE OXYGEN HOSE 3000 PSI, FLARED TUBE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-8789.

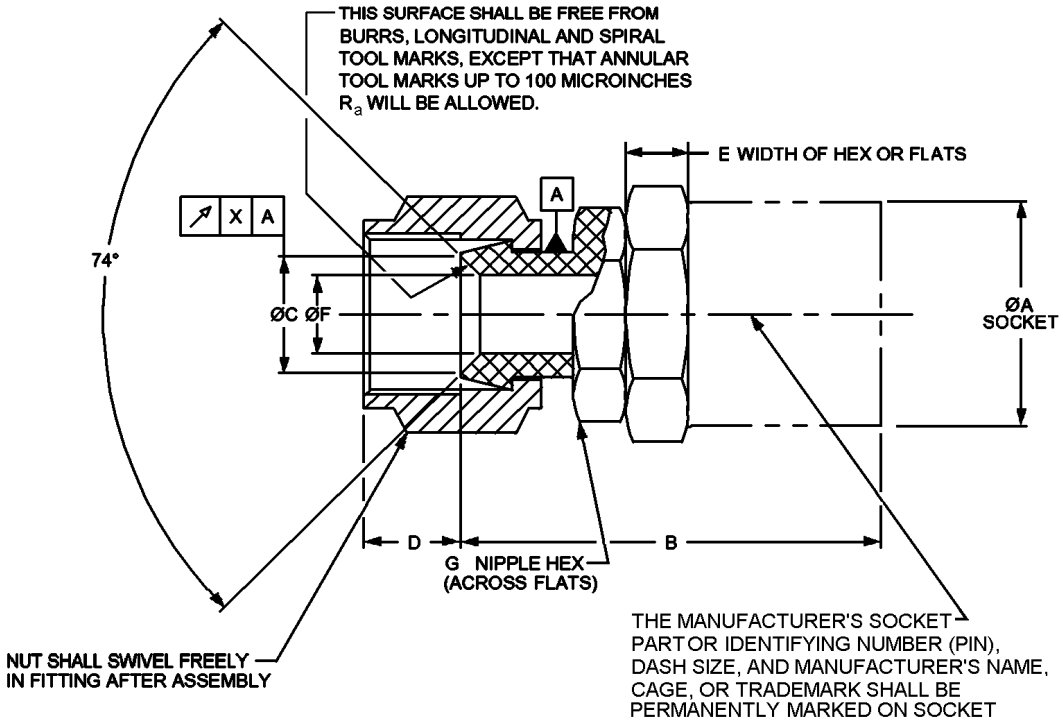


FIGURE 1. Fitting end, straight, flared tube dimensions and configuration.

AMSC N/A

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:54Z
Check the source to verify that this is the current version before use.

Size dash no.	Hose ID ref inches (mm)	Tubing OD inches (mm)	Nut PIN	A dia Max inches (mm)	B Max inches (mm)	C dia inches (mm)	
4	.219 (5.56)	.250 (6.35)	AN818-4	.875 (22.23)	2.100 (53.34)	.295 (7.49)	±.010 (0.25)
5	.281 (7.14)	.313 (7.95)	AN818-5	.937 (23.80)	2.240 (56.90)	.355 (9.02)	
6	.344 (8.74)	.375 (9.53)	AN818-6	1.160 (29.46)	2.470 (62.74)	.435 (11.05)	
8	.438 (11.13)	.500 (12.70)	AN818-8	1.375 (34.93)	2.700 (68.58)	.570 (14.48)	
10	.563 (14.30)	.625 (15.88)	AN818-10	1.550 (39.37)	3.000 (76.20)	.680 (17.27)	
12	.688 (17.48)	.750 (19.05)	AN818-12	1.740 (44.20)	3.230 (82.04)	.850 (21.59)	
16	.875 (22.23)	1.000 (25.40)	AN818-16	2.000 (50.80)	3.800 (96.52)	1.103 (28.02)	±.015 (0.38)

Size dash no.	D inches (mm)		E Min inches (mm)	F dia Min inches (mm)	G min (see note 5) inches (mm)	X inches (mm)
4	.375 (9.53)	±.016 (0.41)	.188 (4.78)	.146 (3.71)	.563 (14.30)	.005 (0.13)
5				.177 (4.50)	.625 (15.88)	
6			.250 (6.35)	.271 (6.88)	.688 (17.48)	
8	.438 (11.13)			.365 (9.27)	.875 (22.23)	.010 (0.25)
10	.515 (13.08)	±.031 (0.79)	.312 (7.92)	.455 (11.56)	1.000 (25.40)	
12	.562 (14.27)		.375 (9.53)	.508 (12.90)	1.250 (31.75)	
16	.620 (15.75)			.778 (19.76)	1.500 (38.10)	

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Unless otherwise specified, tolerances are ±.005 inch (0.13 mm).
4. The fitting identification shall be marked in accordance with MIL-DTL-8789.
5. Hex or flats shall fit standard wrench openings.
6. Threads shall be in accordance with SAE-AS8879

FIGURE 1. Fitting end, straight, flared tube dimensions and configuration - Continued.

REQUIREMENTS:

These fittings are for use with PTFE hose per MIL-DTL-26633


See figure 1 for fitting end sizes and dimensions.

Material: Nipples, nuts, and sockets shall be made of Monel (Nickel-copper alloy UNS N04400).

A non-standard Monel swivel nut may be used provided the hex and thread dimensions are in accordance with AN818 and the nut shall not be removable from the assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:54Z
Check the source to verify that this is the current version before use.

PIN:

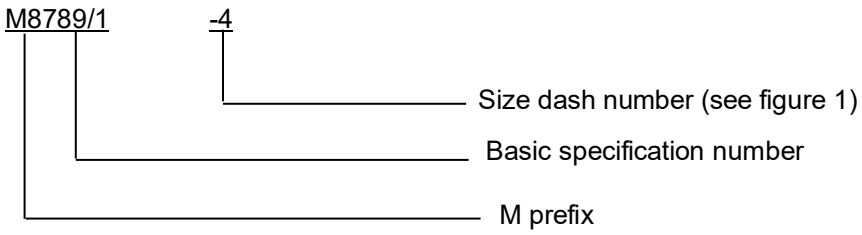

Example of a PIN: M8789/1-4 indicates a .250 inch (6.35 mm) Monel straight fitting flared to hose.

Referenced documents. In addition to MIL-DTL-8789, this document references the following:

MIL-DTL-26633
AN818
SAE-AS8879
UNS N04400

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - AS
Air Force - 71
DLA - CC

Preparing activity:
DLA - CC

(Project 4730-2019-055)

Review activities:
Army - AV, MI
Navy - CG, MC, SA, SH

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:54Z
Check the source to verify that this is the current version before use.