NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-8805/1D
24 September 1969
SUPERSEDING
MIL-S-8805/1C
18 December 1968

PERFORMANCE SPECIFICATION SHEET


SWITCHES, SENSITIVE, SPDT, UNSEALED

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the switches described herein shall consist of this document and the latest issue of Specification MIL-S-8805.

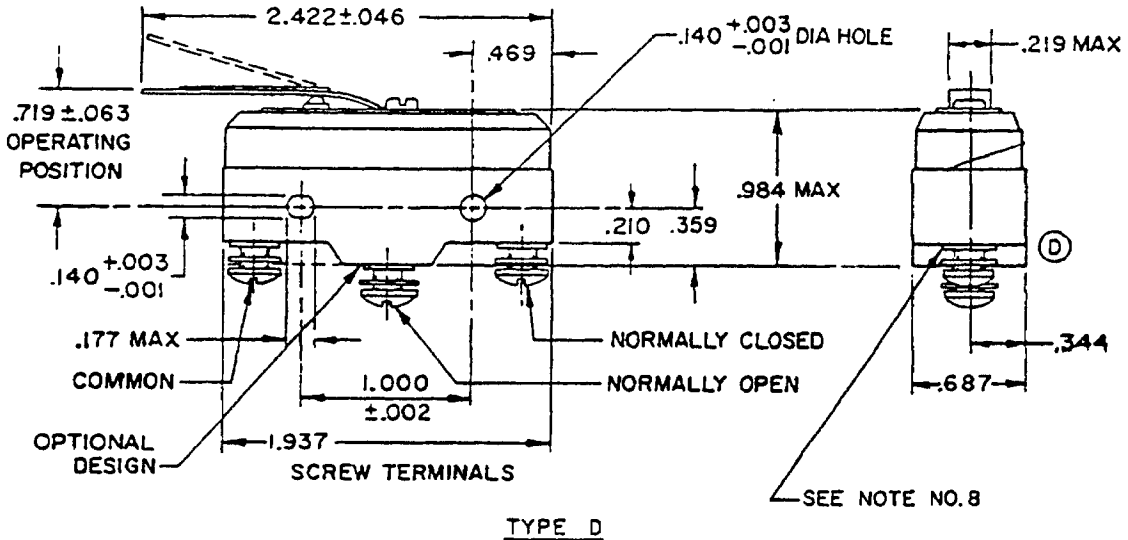

TYPE D

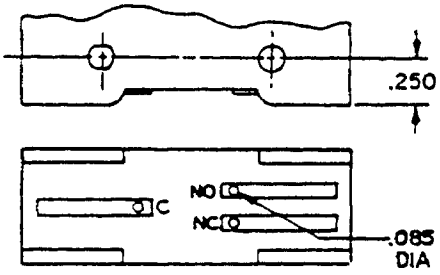


SOLDER TERMINALS


(D) denotes changes

FSC5930


Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

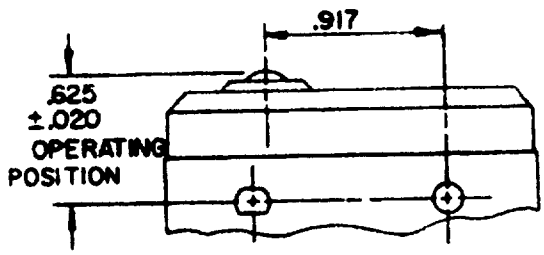


TYPE A

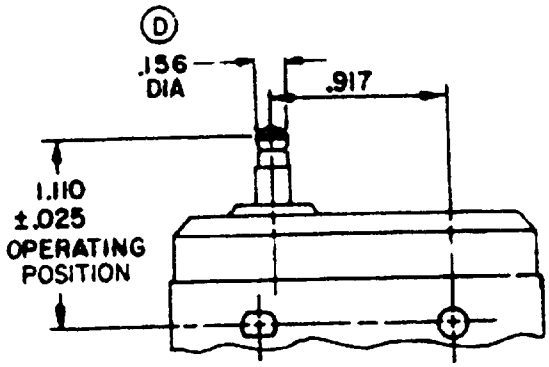


TYPE B

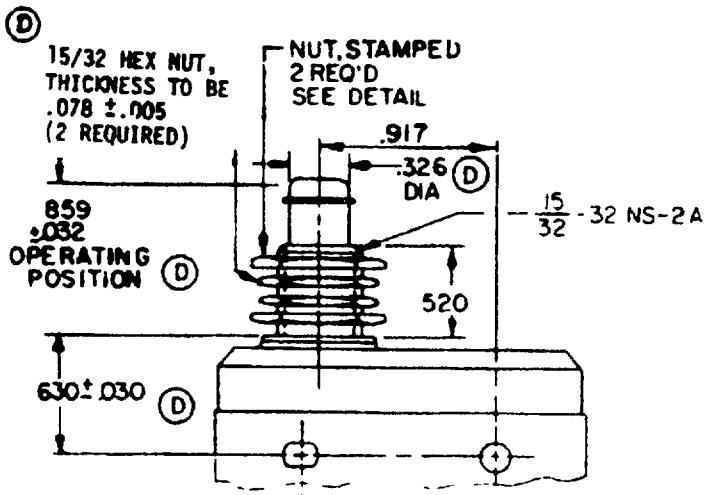

TYPE C

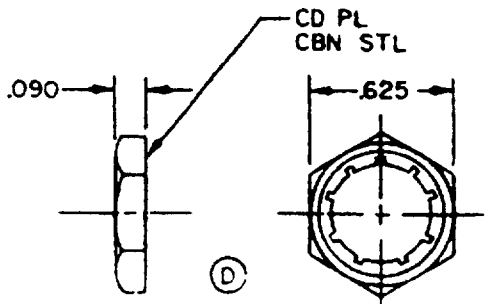



STAMPED NUT DETAIL

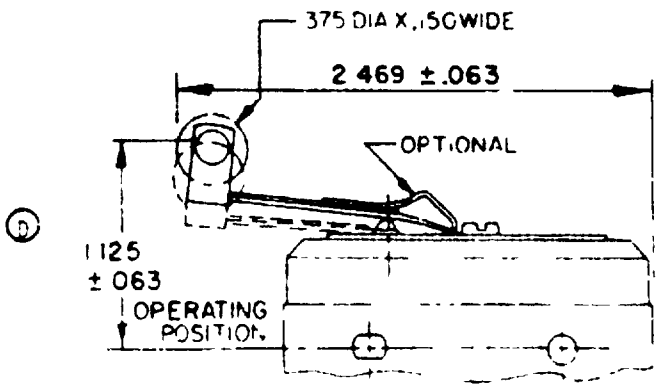



TYPE E

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

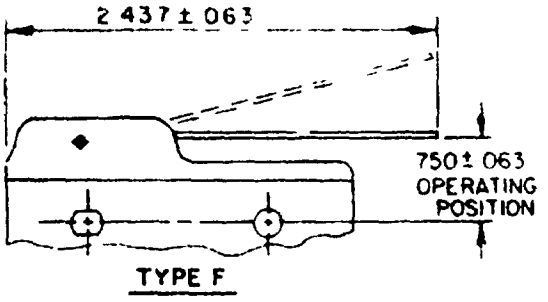

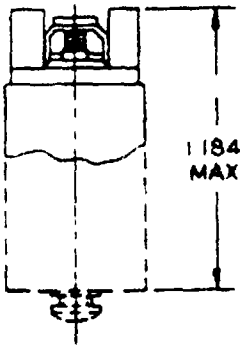

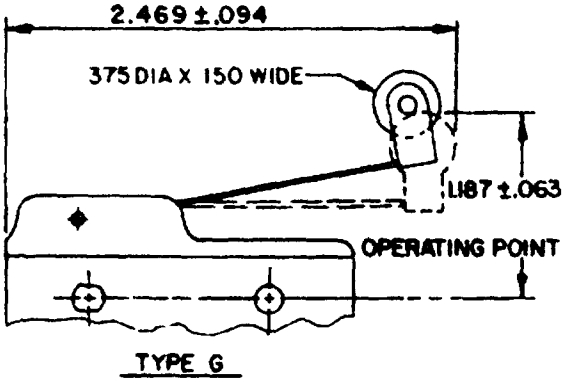

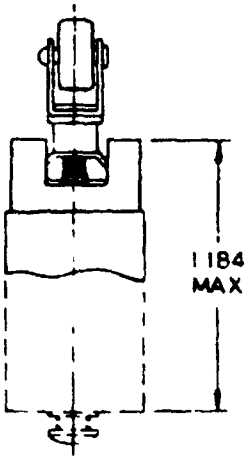

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.001	.03	.140	2.44	.469	11.91	1.110	28.19
.002	.05	.150	3.81	.520	13.21	1.125	28.58
.003	.08	.156	3.96	.625	15.88	1.184	30.07
.020	.51	.177	4.50	.630	16.00	1.187	30.15
.025	.64	.210	5.33	.687	17.45	1.937	49.20
.032	.81	.219	5.56	.719	18.26	2.422	61.52
.046	1.17	.250	6.35	.750	19.05	2.437	61.90
.063	1.60	.326	8.28	.859	21.82	2.469	62.71
.085	2.16	.344	8.74	.917	23.29		
.090	2.29	.359	9.12	.984	24.99		
.094	2.39	.375	9.53	1.000	25.40		

NOTES
1. Dimensions are in inches
2. Unless otherwise specified, tolerance is ±.015 (.38 mm).
3. Exact shape of switch optional provided envelope dimensions are not exceeded
4. Terminals: Captive construction or equivalent
   a. Screw terminals are supplied with lockwashers and No. 6-32 NC-2A, Fil HD, binder HD, or pan HD screws
   b. Solder lug terminals shall accomodate one No. 14 AWG wire.
(D) 5. Mounting holes shall accept .139 (3.53 mm) maximum diameter pins or screws on 1.000±.002 (25.40 ±.05 mm) centers
6. Actuators may be permanently affixed by threading into the plastic cover
7. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
(D) 8. Switch terminal surface shall be free of plastic flash and may extend .030 (.76 mm) max beyond plastic body surface

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration.		See figure.
Enclosure design:		1 (Unsealed).
Temperature characteristic.		1 (-55° to +85°C).
Shock type:	(D)	M(100G) (contacts not monitored during test).
Vibration grade:		1 (10 to 500 Hz) (momentary transfer of contacts permitted in free position; no contact transfer, in excess of 10 microseconds, permitted in actuated position).
Weight:		.1 pound maximum.
Operating characteristics:		See table I.
Strength of actuating means:		
Types A and B:		10 pounds.
Type C:		25 pounds.
Types D, E, F, and G:		8 ounces.
Terminal strength (solder terminals).		5 pounds.
Explosion:		Not applicable.
Contact resistance:		Not applicable.
Acceleration:		50G (except type E and type G shall be 20G).
Moisture resistance:		Minimum insulation resistance, wet condition, 1 megohm.
Dielectric withstanding voltage		
Sea level:		600 vrms.
Altitude:		300 vrms at 50,000 ft
		In qualification inspection table after electrical endurance the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.
Mechanical endurance		See table II.
Electrical ratings:		See table II.
Current ratings:		Application information (see tables IV and V).
Qualification		
Group submission:		See table III.
(D) Part numbers		See table VI

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

TABLE I. Operating characteristics[1/] and part numbers.

	Type	Nominal contact separation (See table IV.) (Inch)	Maximum operating force (Ounce)	Minimum release force (Ounces)	Maximum differential travel (Inch)	Travel		Part number[2/]	
						Maximum pretravel (Inch)	Minimum overtravel (Inch)	Terminal	
								Solder	Screw
	Pin plunger	.010	10	4	.003	.040	.005	-028	-027
	Pin plunger	.020	13	4	.005	.040	.005	-003	-004
A	Pin plunger	.040	20	4	.007	.040	.005	-005	-006
	Pin plunger	.070	28	4	.010	.040	.005	-007	-008
	Spring plunger	.010	10	4	.003	.040	.050	-009	-010
	Spring plunger	.020	13	4	.005	.040	.050	-011	-012
B	Spring plunger	.040	20	4	.007	.040	.050	-013	-014
	Spring plunger	.070	28	4	.010	.040	.050	-015	-016
	Panel mount 1/4-inch overtravel	.010	10	4	.003	.040	.203	-017	-018
	Panel mount 1/4-inch overtravel	.020	13	4	.005	.040	.203	-019	-020
C	Panel mount 1/4-inch overtravel	.040	20	4	.007	.040	.203	-021	-022
	Panel mount 1/4-inch overtravel	.070	28	4	.010	.040	.203	-023	-024
	Leaf spring	.010	5	.5	.030	.156	.031	-025	-026
	Leaf spring	.020	6	.5	.050	.156	.031	-002	-001
D	Leaf spring	.040	7	.5	.065	.156	.031	-029	-030
	Leaf spring	.070	9	.5	.080	.219	.031	-031	-032
	Roller leaf spring	.010	5	.5	.030	.188	.031	-033	-034
	Roller leaf spring	.020	6	.5	.050	.188	.031	-035	-036
E	Roller leaf spring	.040	7	.5	.070	188	.031	-037	-038
	Roller leaf spring	.070	10	.5	.080	.219	.031	-039	-040
	Hinge leaf	.010	3	.5	.060	.375	.160	-041	-042
	Hinge leaf	.020	3.5	.5	.093	.406	.156	-043	-044
F	Hinge leaf	.040	4	.5	.140	.515	.109	-045	-046
	Hinge leaf	.070	7	.75	.150	.515	.125	-047	-048
	Hinge roller leaf	.010	3	.5	.080	.281	.156	-049	-050
	Hinge roller leaf	.020	3.5	.5	.093	.312	.140	-051	-052
G	Hinge roller leaf	.040	4	.5	.131	.469	.109	-053	-054
	Hinge roller leaf	.070	7	.75	.150	.469	.125	-055	-056

1/ Characteristic may change ±25 percent after endurance test.
2/ For replacement cross reference see table VI.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical ratings.

Load	28 VDC		115 VAC - 60 Hz	
	Current amperes	Number of operations	Current amperes	Number of operations
Resistive - sea level	2	100,000	15	100,000
50,000 ft	2	100,000	15	100,000
Inductive - sea level	1	100,000	15	100,000
50,000 ft	1	100,000	15	100,000
Lamp - sea level	1.5	100,000	1.5	100,000
50,000 ft	1.5	100,000	1.5	100,000

TABLE III. Qualification inspection group submission.

Examination or test	Basic switch	Other switch samples	Extent of approval
Qualification inspection table of MIL-S-8805.	M8805/1-038 (all sample units) M8805/1-034 (2 sample units) Table VI, group II.	2 sample units each of all other samples QA is requested for. 1. Visual and mechanical examination 2. Operating characteristics	All

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

TABLE IV. Direct-current ratings. 1/
(Application information)

Nominal contact separation in inches	Direct current (volts)	Noninductive				Inductive			
		Heater load		Lamp load(tungsten)		Motor, relay, or solenoid load			
						Sea level		50,000 feet	
		Normally open contact (amperes)	Normally closed contact (amperes)	Normally open contact (amperes)	Normally closed contact (amperes)	Normally open contact (amperes)	Normally closed contact (amperes)	Normally open contact (amperes)	Normally closed contact (amperes)
.010	6-8	15	20	1.5	3.0	8.0	8.0	7.0	7.0
	12-14	15	20	1.5	3.0	5.0	5.0	5.0	5.0
	24-30	2.0	2.0	1.5	2.0	1.0	1.0	1.0	1.0
	110-115	.4	.4	.4	.4	.03	.03	.02	.02
	220-230	.2	.2	.2	.2	.02	.02	.01	.01
.020	6-8	15	20	1.5	3.0	15	20	15	15
	12-14	15	20	1.5	3.0	10	10	8.0	8.0
	24-30	6.0	6.0	1.5	3.0	5.0	5.0	2.0	2.0
	110-115	.4	.4	.4	.4	.05	.05	.03	.03
	220-230	.2	.2	.2	.2	.03	.03	.02	.02
.040	6-8	15	20	1.5	3.0	15	20	15	15
	12-14	15	20	1.5	3.0	15	20	15	15
	24-30	10	10	1.5	3.0	10	10	5.0	5.0
	110-115	.6	.6	.6	.6	.1	.1	.05	.05
	220-230	.3	.3	.3	.3	.05	.05	.03	.03
.070	6-8	15	20	1.5	3.0	15	20	15	15
	12-14	15	20	1.5	3.0	15	20	15	15
	24-30	15	20	1.5	3.0	10	10	7.5	7.5
	110-115	.75	.75	.75	.75	.4	.4	.2	.2
	220-230	.3	.3	.3	.3	.2	.2	.1	.1

1/Maximum inrush current 30 amperes for normally closed contacts and 15 amperes for normally open contacts.

MIL-S-8805/12D

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

TABLE V. Alternating-current rating at 60 Hz. 1/
(Application Information)

Alternating current (Volts)	Heater load		Lamp load (tungsten)		Motor, relay, or solenoid load	
	Normally open contact (amperes)	Normally closed contact (amperes)	Normally open contact (amperes)	Normally closed contact (amperes)	Normally open contact (amperes)	Normally closed contact (amperes)
110-125	15.0	15.0	1.5	3.0	15.0	15.0
220-250	15.0	15.0	1.25	2.5	15.0	15.0
440-460 2/	3.0	3.0	.75	1.0	2.5	2.5
600 2/	2.0	2.0	.50	.8	2.0	2.0

1/ Maximum inrush current 30 amperes for normally closed contacts and 15 amperes for normally open contacts.

2/ These ratings apply only to sensitive switches having a characteristic of .020, .040, or .070 inch. Characteristic .010 is not rated for service at 440 volts or above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

TABLE VI. Replacement cross reference.

Part number	Replaces JAN-S-63, unless otherwise noted	Part number	Replaces JAN-S-63, unless otherwise noted
M8805/1-001	SS04B20	M8805/1-029	S804A40
M8805/1-002	SS04A20	M8805/1-030	S804B40
M8805/1-003	MS35061(SigC) SS01A20	M8805/1-031	SS04A70
M8805/1-004	MS35061(SigC) SS01B20	M8805/1-032	S804B70
M8805/1-005	SS01A40	M8805/1-033	SS05A10
M8805/1-006	SS01B40	M8805/1-034	S805B10
M8805/1-007	MS35061(SigC) SS01A70	M8805/1-035	MS35063(SigC) S805A20
M8805/1-008	MS35061(SigC) SS01B70, MS25026	M8805/1-036	MS35063(SigC) S805B20
M8805/1-009	SS02A10	M8805/1-037	S805A40
M8805/1-010	SS02B10	M8805/1-038	SS05B40
M8805/1-011	SS02A20	M8805/1-039	MS35063(SigC) SS05A70
M8805/1-012	SS02B20	M8805/1-040	MS35063(SigC) SS05B70
M8805/1-013	SS02A40	M8805/1-041	SS06A10
M8805/1-014	SS02B40	M8805/1-042	SS06B10
M8805/1-015	SS02A70	M8805/1-043	SS06A20
M8805/1-016	SS02B70	M8805/1-044	S806B20
M8805/1-017	SS03A10	M8805/1-045	S806A40
M8805/1-018	SS03B10	M8805/1-046	SS06B40
M8805/1-019	MS35062(SigC) SS03A20	M8805/1-047	SS06A70
M8805/1-020	MS35062(SigC) SS03B20	M8805/1-048	SS06B70
M8805/1-021	SS03A40	M8805/1-049	SS07A10
M8805/1-022	SS03B40	M8805/1-050	S807B10
M8805/1-023	MS35062(SigC) SS03A70	M8805/1-051	SS07A20
M8805/1-024	MS35062(SigC) SS03B70	M8805/1-052	SS07B20
M8805/1-025	SS04A10	M8805/1-053	SS07A40
M8805/1-026	SS04B10	M8805/1-054	SS07B40
M8805/1-027	SS01B10	M8805/1-055	SS07A70
M8805/1-028	SS01A10	M8805/1-056	S807B70

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army - MU
Navy - SH, AS, OS
Air Force - 17, 85
DSA-ES

User activities:
Army - MI, AV
Navy - MC
Air Force - 19

Preparing activity:
Navy - EC
(Project 5930-0668)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No 22-R255

INSTRUCTIONS The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors government activities or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government Fold on lines on reverse side staple in corner, and send to preparing activity Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3 IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4 REMARKS

TELEPHONE NO

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.

R

POSTAGE AND FEES PAID

OFFICIAL BUSINESS
ALTY FOR PRIVATE USE $300

Commander
Naval Electronic Systems Command
Attn: ELEX 5043
Department of the Navy
Washington, DC 20360

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T10:58Z
Check the source to verify that this is the current version before use.