MIL-G-45178A(MO)
5 April 1966
SUPERSEDING
MIL-G-45178(ORD)
12 September 1958

MILITARY SPECIFICATION

GUN, SELF-PROPELLED, FULL TRACKED: TWIN 40MM, M42 and M42A1; PREPARATION FOR STORAGE AND SHIPMENT OF

1. SCOPE

1.1 Scope. This specification covers processing of the Gun, Self-Propelled, Full Tracked: Twin 40MM, M42 and M42A1; for storage outside of buildings, for immediate use shipment, and for domestic or oversea shipment, including carloading; meeting the requirements of levels A, B, and C preservation (see 1.2).

1.2 Classification. Processing shall be of the following levels as specified (see 6.1):

Level A	-	Processing for domestic or oversea shipment and any storage outside of buildings in excess of 90 days from date of processing (periodic care and preservation during storage required).
Level B and C	-	Limited processing for immediate use shipment and for domestic or oversea shipment (excluding open deck loading) and any storage not to exceed 90 days from date of processing.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

Federal

O-E-760	-	Ethyl Alcohol (Ethanol); Denatured Alcohol: and Proprietary Solvent.
O-S-576	-	Sodium Bicarbonate, Technical.
P-C-431	-	Cleaning Compound, Synthetic Detergent, Non-Abrasive, All Purpose.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

MM-L-751	-	Lumber, and Timber, Softwood.
NN-P-530	-	Plywood; Flat Panel.
QQ-A-250/1	-	Aluminum Alloy 1100, Plate and Sheet.
QQ-A-250/2	-	Aluminum Alloy, 3003, Plate and Sheet.
QQ-S-633	-	Steel Bars, Carbon, Cold Finished and Hot Rolled, (General Purpose).
QQ-S-698	-	Steel, Sheet and Strip, Low-Carbon.
QQ-S-700	-	Steel, Sheet and Strip, Medium and High Carbon.
QQ-S-741	-	Steel, Carbon: Structural Shapes, Plates and Bars.
QQ-S-777	-	Steel, Carbon Strip, Cold Rolled, Untempered Spring.
QQ-S-781	-	Steel Strapping, Flat.
RR-W-360	-	Wire Fabric, Industrial.
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
TT-E-489	-	Enamel; Gloss, Synthetic (for Exterior and Interior Surfaces).
TT-E-529	-	Enamel, Alkyd, Semi-Gloss.
TT-P-636	-	Primer Coating, Alkyd, Wood and Ferrous Metal.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
UU-P-271	-	Paper, Wrapping, Waterproofed Kraft.
UU-T-81	-	Tags, Shipping and Stock.
UU-T-106	-	Tape, Pressure-Senstive Adhesive, Masking Paper.
VV-L-800	-	Lubricating Oil, General Purpose, Preservative, (Water-Displacing, Low Temperature).
CCC-C-429	-	Cloth, Osnaburg, Cotton.
NNN-P-40	-	Paper, Lens Tissue.
PPP-B-636	-	Box, Fiberboard.
PPP-C-843	-	Cushioning Material, Cellulosic.
PPP-P-291	-	Paperboard, Wrapping, Cushioning.
PPP-T-60	-	Tape: Pressure-Sensitive Adhesive, Waterproof for Packaging.

Military

MIL-P-116	-	Preservation, Methods of.
MIL-B-117	-	Bags and Sleeves, Interior Packaging.
MIL-B-121	-	Barrier Material, Greaseproofed, Waterproofed, Flexible.
MIL-A-148	-	Aluminum Foil.
MIL-S-207	-	Sulfuric Acid, Electrolyte: Packaging, Packing, and Marking for Shipment and Storage of.
MIL-C-450	-	Coating Compound, Bituminous Solvent Type, Black (For Ammunition).
MIL-W-1511	-	Wire Rope, Steel (Carbon) Flexible Preformed.
MIL-P-3420	-	Packaging Materials, Volatile Corrosion Inhibitor Treated, Opaque.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

MIL-G-5572 - Gasoline, Aviation: Grades 80/87, 91/96, 100/130, 115/145.
MIL-I-8574 - Inhibotors, Corrosion, Volatile, Utilization of.
MIL-G-10924 - Grease, Automotive and Artillery.
MIL-P-12841 - On Vehicle Equipment (OVE) For Military Vehicles, Packaging of.
MIL-S-13281 - Steel: Carbon, Alloy and High Strength Low Alloy, For Welded Structure.
MIL-P-13988 - Paper, Lens, Tissue, Antitarnish, Wrapping.
MIL-P-14232 - Parts, Equipment and Tools for Ordnance Materiel, Packaging of.
MIL-E-15599 - Electrodes, Welding, Covered; Low- And Medium-Carbon Steel.
MIL-C-16173 - Corrosion Preventive, Compound, Solvent Cutback, Cold-Application.
MIL-C-16555 - Coating Compound, Strippable, Sprayable.
MIL-D-16791 - Detergents, General Purpose (Liquid, Nonionic).
MIL-L-21260 - Lubricating Oil, Internal-Combustion Engine, Preservative.
MIL-L-46002 - Lubricating Oil, Contact and Volatile Corrosion Inhibited.
MIL-T-50036 - Talc, Technical, Tl.

STANDARDS
Military
MIL-STD-129 - Marking, for Shipment and Storage.
MIL-STD-647 - Packaging Standards, Preparation and Use of.
MIL-STD-1261 - Welding Procedures for Constructional Steels.

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document forms a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

ASSOCIATION OF AMERICAN RAILROADS PUBLICATION

Section No. 1 - General Rules Governing Loading of Commodities on Open Top Cars.
Section No. 6 - Rules Governing the Loading of Department of Defense Materiel on Open Top Cars.

(Application for copies should be addressed to the Association of American Railroads, 59 East Van Buren, Chicago 5, Illinois.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Level A.

3.1.1 First production processed vehicle. Unless otherwise specified (see 6.1), the first production processed vehicle shall be subjected to the inspection specified in 4.2. Approval of the first production processed vehicle shall not relieve the contractor of his obligation to process all vehicles in accordance with this specification. Except as otherwise specified by the procuring activity, any change to materials or design after approval of the first production processed vehicle shall require submission of an additional production processed vehicle to the inspection specified in 4.2.

3.1.2 One of the next 10 production processed vehicles. After approval of the first production processed vehicle (see 3.1.1), one of the next 10 production processed vehicles shall be selected by the Government representative, for inspection specified in 4.2.

3.1.3 Materials.

3.1.3.1 Stock numbers. Materials to be obtained through Government supply channels shall be ordered by stock numbers or specifications.

3.1.3.2 Volatile corrosion inhibitor (VCI). When a VCI - type barrier material is specified, it shall conform to type I, class 3, style A, of MIL-P-3420 and shall be used in accordance with MIL-I-8574.

3.1.3.3 Exterior overspray. When exterior surfaces of vehicle and such items as tape and shrouds are to be oversprayed, coating compound conforming to MIL-C-16555 shall be used. Thickness of coating shall be such as to result in a minimum thickness of 0.040 inch, measured after four hours of drying (see 4.6.1). Specified thickness shall extend not less than two inches beyond tape or other bridging material.

3.1.4 Preparation prior to processing. Except as otherwise specified herein, and to the maximum extent consistent with production efficiency, economy and safe storage and shipment, vehicle shall be prepared for storage and shipment in a completely assembled condition after test runs, and completion and approval of all necessary repairs. Specified equipment shall be installed and all adjustments made so that the vehicle may be operated, shipped, and placed into service with a minimum of delay.

3.1.4.1 Processing records. Records of vehicle processing shall be maintained, and shall be readily available for review by the Government inspector.

3.1.5 Cleaning and drying.

3.1.5.1 Interior of vehicle. Vehicle interior surfaces shall be cleaned in accordance with process C-1 of MIL-P-116, except that cleaning compounds shall be in accordance with detergents conforming to P-C-431 or MIL-D-16791, in warm water

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

solution. Liquids under pressure shall be used only in the engine compartment. Drying shall be in accordance with any applicable procedure of MIL-P-116.

3.1.5.1.1 Battery supports and retainers. Battery supports and retainers shall be cleaned with a solution composed of 1/2 pound of sodium bicarbonate, conforming to O-S-576, per gallon of water, and shall be flushed with clear water and dried. Battery supports and retainers shall be coated with coating compound conforming to MIL-C-450.

3.1.5.1.2 Fire control instruments. Exposed optical glass components of fire control instruments shall be cleaned by blowing exposed optical glass surfaces with air from a hand syringe, or by use of a clean, camel's hair brush, followed by the use of ethyl alcohol conforming to O-E-760. In cases of contamination not removed by alcohol, cleaning shall be accomplished by use of a solution consisting of two ounces of detergent conforming to MIL-D-16791, 1/2 gallon of alcohol conforming to O-E-760, and one gallon distilled water. Using a swab made of paper conforming to type I or II of NNN-P-40, optical glass surfaces shall be washed with the cleaning agent; and washing shall be repeated, using a clean swab each time, until no dirt or other foreign matter remains on the surface. Cleaning shall be accomplished with a minimum of pressure and rubbing, and without use of cloth or rubber materials. Immediately after cleaning, the optics shall be covered or wrapped with lens tissue conforming to MIL-P-13988, and secured with tape conforming to UU-T-106.

3.1.5.1.3 Fuel filter sediment bowl. Fuel filter sediment bowl shall be disconnected from fuel line. Sediment bowl shall be cleaned in accordance with process C-1 of MIL-P-116, and dried by any applicable procedure specified therein. Sediment bowl shall be flushed with lubricating oil conforming to VV-L-800 and reinstalled.

3.1.5.1.4 Backrests, seats and protective pads. Cushioned components of installed backrests, seats and protective pads shall be washed with a solution of soap and water, rinsed with clear water and dried, and immediately packaged (see 3.1.18).

3.1.5.2 Exterior of vehicle. Using a mild detergent, vehicle exterior surfaces shall be cleaned in a manner which will assure removal of all foreign matter, including cleaning material. Cleaning shall be followed by a complete rinsing with clear water, then thoroughly dried. Vehicle shall be cleaned without directing steam or water jet at or above ring opening between turret and upper hull, against any armament, or into exhaust openings.

3.1.5.2.1 Cannon. When inspection indicates the need for reprocessing of cannon (see 4.5.2.2), cannon shall be cleaned in accordance with process C-3 of MIL-P-116 and shall be thoroughly dried in accordance with procedure D-4 as specified therein.

3.1.6 Relubrication. When vehicle has been operated in excess of 50 miles since previous lubrication, or after a liquid or steam cleaning, vehicle shall be lubricated using materials in accordance with drawings, specifications or lubrica-

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

tion order pertinent to the vehicle. All exposed oil can points such as: hinges, latches, control rod clevises and pins, control levers, brake linkage and throttle control linkage shall be lubricated with lubricating oil conforming to VV-L-800. Excess lubricating material shall be removed after lubrication.

3.1.7 Transmission and final drives. Transmission and final drives shall contain preservative oil only. Preservative oil in transmission shall conform to grade 1 of MIL-L-21260, filled to operating level. Final drives shall contain preservative oil conforming to grade 1, 2 or 3, as applicable, of MIL-L-21260, filled to operating level. DD Form 1397 (see 3.1.21) shall be completed to indicate grade of preservative oil used.

3.1.8 Main and auxiliary engine crankcases. Engine crankcases shall contain preservative oil only, conforming to grade 1, 2 or 3, as applicable, of MIL-L-21260, filled to operating level. DD Form 1397 shall be completed to indicate grade of preservative oil used.

3.1.9 Main engine.

3.1.9.1 Preservation through fuel system and carburetor. A frame-supported container with two compartments (see figures 1 and 2) shall have one compartment filled with lubricating oil conforming to grade 1 of MIL-L-46002 and the other compartment filled with fuel conforming to MIL-G-5572. Vehicle fuel tank selector valve shall be placed in the "OFF" position. A tag bearing the information, "REFILL FUEL TANK BEFORE CHANGING POSITION OF THE SELECTOR VALVE", shall be securely attached to the fuel tank selector valve handle. The fuel-intake line shall be disconnected from the fuel-tank side of engine-driven fuel pump, at the quick-disconnect coupling. The female quick-disconnect coupling on the line from the container shall be connected to the male quick- disconnect coupling of fuel-intake line. (For injector type engine, injector fuel return line shall be disconnected at quick-disconnect coupling. A line shall be provided and connected to the fuel-return line to permit draining into a recovery container. Recovered fuel-oil mixture shall not be used for processing other engines). Container valve shall be turned to the "FUEL" position. Engine shall be started and operated at minimum idle for one minute. The engine shall be accelerated to 3/4 speed, without load, at which time the container valve shall be turned from the "FUEL" to the "OIL" position. The instant engine begins to misfire the magneto switches shall be turned to the "OFF" position. Container fuel-return line shall be disconnected from the engine and vehicle fuel line reconnected.

3.1.9.2 Preservation through spark plug openings. After preservation through fuel system, engine shall be cooled for 24 hours or until a maximum cylinder head temperature, measured at spark plug seats, of 100°F. is reached. Induced air currents may be used to accelerate cooling of engine. The fuel-filter housing shall be drained. One spark plug shall be removed from each cylinder. Protection shall be provided to assure maximum care in handling of spark plugs to avoid damage to electrodes and threads during processing. While the engine is being cranked with the starting motor, two ounces of preservative oil conforming to grade 1 of MIL-L-46002

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

shall be atomized sprayed into each cylinder through the spark plug opening. Equipment shown in figures 3 and 4 has proved satisfactory for this operation. Two additional ounces of the grade 1 preservative oil shall be atomized sprayed into each cylinder, without cranking. Threaded ends of removed spark plugs shall be coated with preservative oil conforming to grade 1 of MIL-L-46002 and plugs shall be reinstalled. A red warning tag containing the following information shall be located within the driver's compartment: "ENGINE PRESERVED FOR STORAGE; DO NOT CRANK". DD Form 1397 shall be completed to indicate the grade of preservative oil used.

3.1.10 Auxiliary engine.

3.1.10.1 Preservation through fuel system and carburetor. Using the same container, fuel, and oil specified for the main engine, the auxiliary engine flexible fuel line shall be disconnected at the quick disconnect located at rear of the auxiliary engine. Container coupling (see figure 2) shall be attached to the female end of the quick-disconnect leading to the fuel filter. Engine shall be started and operated on fuel until running smoothly, at which time the valve on container shall be switched from "FUEL" to "OIL". Engine shall be operated until it begins to misfire, at which time the magneto shall be switched to "OFF" position. Container fuel return line shall be disconnected from the engine, and flexible fuel line reconnected.

3.1.10.2 Preservation through spark plug opening. After preservation through fuel system, engine shall be cooled to 100°F, or less. Spark plug shall then be removed and while cranking engine with the starter, one ounce of preservative oil conforming to grade 1 of MIL-L-46002, shall be atomized sprayed into the cylinder through the spark plug opening. Engine shall be cranked an additional five revolutions after spraying of preservative. After engine has stopped, one additional ounce of the same preservative oil shall be sprayed through the spark plug opening. Engine shall not be cranked during or after spraying of the second ounce of preservative oil. Threaded end of spark plug shall be coated with grade 1 preservative oil and spark plug reinstalled.

3.1.11 Air cleaners. Air cleaners shall be filled to operating level with oil in accordance with applicable drawings, specifications, or lubrication order. When operating oil is not specified, preservative oil conforming to grade 1 or 2, as applicable, of MIL-L-21260 shall be used.

3.1.12 Fuel tanks. Fuel tanks shall be completely drained of fuel. Tanks shall be filled to maximum capacity with preservative oil conforming to grade 2 of MIL-L-21260, drained until flow ceases, and the drain plugs reinstalled. Fuel tank cap and filler screens shall be coated with preservative oil conforming to grade 2 of MIL-L-21260 and reinstalled. The drained preservative oil may be reused for processing additional fuel tanks provided not more than 10 percent of the resultant fluid is gasoline when tested as specified in 4.6.3.

3.1.13 Turret ring bearing. Plugs shall be removed from grease fitting openings in turret ring bearing, and grease fittings installed. Grease conforming to MIL-G-10924 shall be pumped through grease fittings until grease is visible between the two sections around the circumference of the ring (grease fitting is located under the access openings in the cannon mount sub-floor, near the elevating mechanism).

Source: https://assist.dla.mil -- Downloaded: 202640-22T02:31Z
Check the source to verify that this is the current version before use.

The turret shall be rotated five times in each direction and again lubricated to replace displaced lubricant. Grease fittings shall then be removed and plugs reinstalled. Excess grease shall be removed from the outside surfaces. The DD Form 1397 tag shall be marked with information: "TURRET BEARING COMPLETELY FILLED WITH GREASE - MIL-G-10924."

3.1.14 Cannon and mount.

3.1.14.1 Flash suppressor. Flash suppressor shall be removed. Unpainted machined threaded surfaces of flash suppressor shall be coated with grease conforming to MIL-G-10924. Flash suppressor shall be wrapped in barrier material conforming to type II, grade A, class 2 of MIL-B-121, placed in a box conforming to PPP-B-636, and secured within the vehicle hull.

3.1.14.2 Cannon preservation. Immediately after cleaning (see 3.1.5.2.1), the bore and chamber of the cannon shall be coated with preservative oil conforming to VV-L-800. Excess preservative shall be allowed to drain from coated surfaces. The bore and chamber shall be protected by inserting a strip of VCI barrier material conforming to MIL-P-3420 (see 3.1.3.2). Material shall be of a size that will provide a continuous cover for the bore and chamber surfaces. Treated side of VCI material shall be adjacent to bore and chamber surfaces. Exterior unpainted surfaces of the muzzle end of the cannon shall be coated with preservative oil conforming to VV-L-800, and covered with a wrap of VCI barrier material conforming to MIL-P-3420. The wrap shall extend 2 inches from the muzzle end to three inches on the painted surface beyond the finished surface. Seams and edges shall be sealed with tape conforming to PPP-T-60. Plugs shall be provided for the muzzle and breech ends of the cannon (see figure 5). All cannon contacting surfaces of the plugs shall be coated with coating compound conforming to MIL-C-16555 (see 3.1.3.3). The coated muzzle plug shall then be positioned in the end of the cannon and secured in place with tape conforming to class 1, of PPP-T-60. The joint between plug and cannon shall be completely sealed with tape conforming to class 1 of PPP-T-60. The exposed surfaces of plug and VCI barrier material shall be over-wrapped with aluminum foil conforming to MIL-A-148. All seams and edges shall then be sealed with tape conforming to class 1 of PPP-T-60. After taping, foil overwrap shall be coated with coating compound conforming to MIL-C-16555. Chamber plug shall be inserted in cannon chamber and breech block shall then be raised. Recuperator spring, recuperator spring seat washer, retaining collar and cannon surface adjacent to recuperator spring shall be coated with grease conforming to MIL-G-10924. Exterior phosphated surface of the cannon, from the end of the VCI wrap to the recuperator retaining collar, shall be coated with grease conforming to MIL-G-10924; and overwrapped with barrier material conforming to type I, grade C, of MIL-B-121. Overwrap shall be coated with coating compound conforming to MIL-C-16555. Unpainted surfaces, including phosphated surfaces; of breech ring mechanism, breech block assembly, breech operating mechanisms, and breech closing spring assembly shall be coated with grease conforming to MIL-G-10924.

3.1.14.3 Exercising of recoil mechanism. Prior to preservation as specified in 3.1.14.2, and when the recoil cylinders have not been exercised, proof fired, overhauled, or manufactured within four months prior to preparation for storage or

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

shipment, the recoil cylinders shall be exercised a minimum of three cycles with a four inch movement out of battery for each cycle. Recoil cylinder anchor brackets shall be removed. Cannon shall be elevated approximately 25 degrees with the hand operating elevation crank. After reassembly, breech ring lug and exposed surface of the recoil piston rod shall be coated with grease conforming to MIL-G-10924. Record of exercising shall be entered on DA Form 2408-4 "Weapon Record Data", and proof testing of the weapon shall be entered on DA Form 2408-9 "Proof Acceptance Record" (see 3.1.20).

3.1.14.4 Cannon mounts. The exposed, unpainted surfaces of elevating cylinder, trunnions, trunnion caps, and trunnion bearings including phosphated surfaces, shall be coated with grease conforming to MIL-G-10924.

3.1.14.5 Miscellaneous armament and related items. Except as otherwise specified herein, all exposed unpainted metal surfaces, including phosphated surfaces, of the following items shall be coated with grease conforming to MIL-G-10924:

(a) Equilibrators.
(b) Traversing ring gear and pinion.
(c) Traversing bearing.
(d) Elevating mechanism.
(e) Traversing mechanism.
(f) Elevating sector and pinion.
(g) Automatic loader assembly.
(h) Loader tray assembly.
(i) Breech casing.
(j) Firing lever assembly.
(k) Firing rod assembly and related parts.
(l) Cartridge case chute.
(m) Deflector assembly.

3.1.15 Batteries, electrolyte, and cables.

3.1.15.1 Dry charge batteries and cables. Positive battery cables shall be taped to the battery-to-ground cable with tape conforming to class 1 of PPP-T-60. Battery supports, retainers and related hardware shall be grouped together and secured to battery cables with the same type and class tape. Dry charge batteries shall be packaged and packed in accordance with the level A requirements of Packaging Data Sheet MS-35000-3. Instructions for activation of batteries shall be packed with the battery. Dry charge batteries shall be stowed with On Vehicle Equipment (OVE) and secured independently in a manner to prevent movement and damage in transit.

3.1.15.2 Electrolyte. Electrolyte shall be packaged, packed, and marked in accordance with type IV, class 1, or 2 unit, of MIL-S-207.

3.1.16 Miscellaneous preservation. Except as otherwise specified herein, all exposed, unpainted, metal surfaces on the outside of the vehicle, except tracks, shall be coated with compound conforming to grade 4 of MIL-C-16173. All interior, exposed, unpainted, unplated metal surfaces shall be coated with compound conforming to grade 4 of MIL-C-16173.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

3.1.17 Hatches and doors. Rubber seals around hatches and doors shall be coated with powdered talc conforming to MIL-T-50036. Hatches shall be closed and locked from the inside, except that the driver's hatch shall be secured with an approved railroad seal placed through the locking lugs.

3.1.18 Seats, backrests and protective pads. Immediately after cleaning (see 3.1.5.1), cushioned components of seats shall be covered with paper conforming to grade B of UU-P-268 having a minimum basis weight of 60 pounds. Paper shall be secured with tape conforming to UU-T-106.

3.1.19 Fire control items.

3.1.19.1 Periscope and instrument lights. If installed periscopes M13, M19, reflex sight M24C, computing sight M38, and instrument lights without batteries shall be removed and packaged in accordance with level A requirements of MIL-P-14232 and MIL-STD-647, the packaged items shall be packed and stowed in accordance with MIL-P-12841.

3.1.19.2 Ring sights. If installed, ring sights shall be removed from vehicle and packaged method IC-3 of MIL-P-116.

3.1.20 Record forms. A copy of "The Equipment Log Book" consisting of Binder (FSN 7510-889-3494) with required forms, and two copies of "Processing and Deprocessing Record for Shipment, Storage and Issue of Vehicles and Spare Engines", DD Form 1397 and including single copies of DA Form 2408-4, Weapon Record Data and DA Form 2408-9, Proof Acceptance Record (see 6.2) shall be furnished and completed with each vehicle. Instructions for preparation and attachment or location of "The Equipment Log Book" shall be supplied by the Government Representative. One copy of DD Form 1397 shall be placed in a bag conforming to type II, class B of MIL-B-117. Bag shall be closed by stapling, identified and secured to headlamp. The duplicate copy shall be placed in the bag with the log book.

3.1.21 Vehicle sealing. Vehicle closure shall be of the rigid, or the flexible type, as specified (see 6.1), and shall conform to the following:

3.1.21.1 Rigid closure.

3.1.21.1.1 Engine compartment. The engine compartment shall be covered with barrier material conforming to CCC-C-429. All projecting areas and sharp corners shall be cushioned with cushioning material conforming to type II, class B, of PPP-C-843 prior to installation of barrier. Barrier shall overlap edges a minimum of three inches and secured in position with tape conforming to PPP-T-60. Barrier and tape shall be oversprayed with compound conforming to MIL-C-16555 with overspray extending three inches beyond edges.

3.1.21.1.2 Cannon mount compartment. Cannon mount shall be covered with a layer of barrier material conforming to CCC-C-429. All projecting areas and sharp corners shall be cushioned with cushioning material conforming to type II, class B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

of PPP-C-843 prior to installation of closure, and secured in position with tape conforming to class 1 of PPP-T-60. Closure shall be secured in position by 3/4 by .020 inch steel strapping conforming to QQ-S-781, around the outer perimeter of cannon mount and oversprayed with coating compound conforming to MIL-C-16555.

3.1.21.1.3 Ventilators.

3.1.21.1.3.1 For cannon mount compartment. An adapter conforming to figure 19 shall be installed and securely attached in closure of cannon mount compartment. A ventilator conforming to figure 20 shall then be installed and secured on ventilator adapter. Ventilator and adapter shall be installed in the closure at the highest point possible without increasing the overall cube of the vehicle. Openings around adapter and closure shall be sealed with tape conforming to class 1 of PPP-T-60 and oversprayed with coating compound conforming to MIL-C-16555.

3.1.21.1.3.2 For driving compartment. Periscope guard shall be removed from commander's periscope mount. A ventilator adapter assembly conforming to figure 21, shall be installed in the periscope opening. Opening around outside of adapter shall be oversprayed with coating compound conforming to MIL-C-16555. Periscope guard shall be reinstalled on commander's periscope mount by securing the front legs on the rear mounting lugs. The two remaining nuts shall be secured on the front mounting lugs.

3.1.21.1.4 Exterior brake operating device. Vehicles shall have a special brake operating device installed (see figures 23 through 28), prior to vehicle sealing, in accordance with figure 22. Gear shift lever shall be placed in neutral, and blocked in that position. Brakes shall be fully applied. Front drain valve assembly, seal, and bolts shall be removed and stowed in right rear stowage box. Cable guide shall be installed with two 3/8 inch bolts. Cable assembly shall be attached to brake rod clevis at parking brake drum. Yellow painted end of cable shall be passed out of vehicle through hole in cable guide. Unused drain valve openings shall be coated with preservative conforming to grade 1 of MIL-C-16173. A warning tag shall be attached to cable guide.

3.1.21.1.4.1 Releasing brake from outside. To release brake, bolt shall be removed from front of guard at parking brake drum, rear bolt shall be loosened, and guard shall be moved away from the drum. End of release wire shall be twisted around end of parking brake control rod, routed around right side of front guard support and end wire shall be passed out of vehicle through opening in cable guide. A two inch diameter loop shall be made for releasing brake. Guard shall be replaced and secured.

3.1.21.2 Flexible closure.

3.1.21.2.1 Chassis. A closure consisting of a frame assembly and a cover assembly shall be fabricated, assembled, and installed in accordance with Appendix I, figures 6A through 119.

3.1.22 Ventilation. All access plates and gaskets on underside of vehicle shall be removed. All drain valves in hull and stowage boxes shall be opened for ventilation. All unpainted, metal surfaces shall be coated with preservative conforming to grade 4 of MIL-C-16173. Removed items shall be placed in a box conforming to PPP-B-636 and stowed within vehicle. Unpainted threaded portions exposed by removal

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

of items shall be coated with preservative, conforming to grade 4 of MIL-C-16173. Screens constructed of wire cloth, 0.047 inch diameter, 4 by 4 mesh conforming to type I, class 1 of RR-W-360 shall be installed in access plate openings and secured with existing bolts. The following information shall be stenciled on exterior of vehicle. "REMOVE SCREENS, INSTALL ACCESS PLATES, COVERS AND GASKETS, CLOSE DRAIN VALVES IN HULL AND STOWAGE BOXES BEFORE DEEP WATER FORDING OR OFF SHORE LOADING".

3.1.23 Fire extinguishers. Fixed fire extinguisher cylinders shall have a minimum of 90 percent of rated full charge. All seals shall be intact and WD Form 253 shall be completed and securely attached to the extinguisher.

3.1.24 OVE saddle. Unless otherwise specified (see 6.1), an OVE saddle shall be constructed and installed in accordance with figures 29 through 52. Saddle shall be painted with two coats of olive drab enamel conforming to TT-E-529.

3.2 Levels B and C. Vehicles shall be processed the same as specified for level A with the following exceptions:

3.2.1 Transmission and final drives. Transmission and final drives shall be filled to operating level with lubricants in accordance with applicable drawings, specifications, or lubrication orders; except when transmission contains preservative oil conforming to grade 1 of MIL-L-21260 or final drives contain grade 2 or 3 of the same preservative oil, operating level shall be attained by the addition of the applicable grade of preservative oil. Operating and preservative lubricants shall not be mixed. DD Form 1397 shall be completed to indicate grade of lubricant or preservative oil used.

3.2.2 Main and auxiliary engine crankcases. Engine crankcases shall be filled to operating level with oil in accordance with applicable drawings, specifications or lubrication orders, or preservative oil conforming to grade 1 or 2, as applicable, of MIL-L-21260. Operating and preservative lubricants shall not be mixed. DD Form 1397 shall be completed to indicate grade of preservative oil used.

3.2.3 Fuel tanks. Unless otherwise specified (see 6.1), vehicles shall be shipped without draining residual fuel from the fuel tanks.

3.2.4 Vehicle sealing.

3.2.4.1 Engine compartment. For level C only, vehicle shall be provided with engine compartment cover of barrier material conforming to class E-3 or L-4 of UU-P-271. Cover shall be affixed to the grille deck. The barrier material shall extend beyond the end of the hull a minimum of four inches, and shall be extended over the edge of the vehicle, covering engine exhaust grilles, to the stationary shield and sealed. Barrier material shall be provided with grommets spaced a minimum of 16 inches apart and applied to the barrier material edge through a double

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

thickness of the material. Cover shall be secured to the vehicle by tying with rope through the cover grommets. All sharp corners and edges beneath the cover shall be cushioned with fiberboard conforming to PPP-P-291 and secured with tape conforming to UU-T-106. Cushioning shall be applied only to the immediate corner or sharp edge requiring cushioning.

3.3 All levels.

3.3.1 On vehicle equipment (OVE). Except as otherwise specified herein, all spare parts, tools, equipment and other loose items shall be preserved and packaged level A in accordance with applicable packaging data sheets, MIL-P-12841 and MIL-P-14232. Packaged items shall then be packed in accordance with level A requirements of MIL-P-12841 and containers identified to pertinent vehicle by serial number. Containers shall be marked in accordance with MIL-STD-129 and stowed, stored, loaded or shipped in conformance with MIL-P-12841 for level specified in 6.1.

3.3.2 Loading. Vehicles shall be blocked, braced and anchored on open top railroad cars in accordance with Association of American Railroad Rules governing loading on open top cars, Section No. 1 and figure 79 of Section No. 6. Parking brake shall be set. (See figures 37 and 43.)

3.3.2.1 Reprocessing engine after loading. If engine is operated in connection with loading or moving vehicle to loading area, the engine shall be reprocessed as specified in 3.1.9. An auxiliary fuel tank shall supply the fuel. The engine grille covers shall be removed before operation of engines, and engine shall be warmed before vehicle is moved under its own power. After reprocessing of engine, engine grille covers shall be reinstalled and sealed as specified herein.

3.3.3 Marking. In addition to any special marking required herein or in the contract or order (see 6.1), vehicles shall be marked in accordance with MIL-STD-129. The information "LIFT HERE" shall be stenciled adjacent to each lifting eye, using white enamel conforming to TT-E-529. Stenciling shall be in characters a minimum of 3/4 inch high and shall be readily visible when OVE is loaded on OVE saddle.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 First production processed and one of next 10 production processed vehicles. The first production processed vehicle (see 3.1.1), and one of the next 10 production processed vehicles (see 3.1.2) shall be subjected to inspection specified in 4.5 through 4.6.2.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

4.3 Production processed vehicles. Except as otherwise specified herein, all production processed vehicles shall be subjected to inspection specified in 4.5 through 4.5.2.3.

4.4 Rejection. Failure of the first production, one of the next 10, or any production processed vehicle to conform to the requirements of this specification shall be cause for rejection of the vehicle, and refusal to continue acceptance of vehicles, by the Government, until objective evidence has been provided, by the contractor, that corrective action has been taken to eliminate the conditions which caused rejection.

4.5 Quality conformance inspections.

4.5.1 Materials. Except for materials which have been Government inspected at the source, all materials to be used in processing of vehicles shall be inspected in accordance with the material specification; or certified inspection and laboratory test reports shall be furnished which show that materials, as furnished, conform to the detailed specification.

4.5.2 Processing. All vehicle processing shall be inspected to determine conformance to this specification. Inspection of processing shall include all items specified in table I, and 4.5.2.1 through 4.5.2.3.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

Table I. Processing inspection
(See indicated paragraphs for Level A, Level B, and Level C requirements)

	Cleaning	Preservation		Packaging
	Levels	Level	Levels	Levels
	A, B and C	A	B and C	A, B and C
Battery supports and retainers	3.1.5.1.1	3.1.5.1.1		
Fire control items	3.1.5.1.2			3.1.19
Fuel filter sediment bowl	3.1.5.1.3	3.1.5.1.3		
Backrests, seats and protective pads	3.1.5.1.4			3.1.18
**Cannon and mount	3.1.5.2.1	3.1.14		
Relubrication		3.1.6		
*Transmission and final drives		3.1.7	3.2.1	
*Crankcases		3.1.8	3.2.2	
*Main engine	3.1.5.1	3.1.9		
Auxiliary engine	3.1.5.1	3.1.10		
Air cleaners		3.1.11		
Fuel tanks		3.1.12	3.2.3	
Turret ring bearing		3.1.13		
Batteries and cables		3.1.15		3.1.15
Miscellaneous preservation		3.1.16		
Hatches and doors	3.1.5.1, 3.1.5.2	3.1.17		
Record forms		3.1.20		3.1.20
Vehicle sealing				3.1.21, 3.2.4
Ventilation				3.1.22
Fire extinguishers				3.1.23
OVE saddle				3.1.24
OVE items				3.3.1
Loading		3.3.2.1		3.3.2
Marking				3.3.3

*Inspect DD Form 1397
**Inspect DA Form 2408-4 and DA Form 2408-9

4.5.2.1 Cleaning. To determine conformance to 3.1.5.1, interior of vehicles shall be examined for cleanliness, and one vehicle each day shall be tested for cleanliness in accordance with the applicable provisions of MIL-P-116. To determine conformance to 3.1.5.2, exterior of vehicle shall be examined for cleanliness. Surfaces to which tape is to be applied shall be examined for cleanliness before applying tape.

4.5.2.2 Cannon. Cannon shall be examined to determine condition and effectiveness of processing. When reprocessing has been accomplished, it shall be examined for conformance to 3.1.5.2.1 and 3.1.14.2.

4.5.2.3 Fuel tanks. To determine conformance to 3.1.12, interior of fuel tanks shall be examined and visual inspection shall assure that complete processing, as specified, has been accomplished.

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

4.6 Quality conformance tests.

4.6.1 Coating compound thickness. A minimum of one vehicle per day shall be inspected for thickness of coating compound to determine conformance to 3.1.3.3. After four hours of drying, four 1 inch square specimens of barrier material shall be cut from areas (flat and contour) selected at random by the Government inspector, and measured for specified thickness, using equipment conforming to figure 53.

4.6.2 Spray test. When specified (see 6.1), vehicles shall be subjected to a spray test. Prior to test, drain plug shall be removed and any accumulation of water drained, then drain plug shall be reinstalled. Areas within reach from exterior of vehicle around access and inspection openings shall be examined to assure removal of moisture. Vehicle shall be subjected to a continuous spray of water for four hours, produced by means of nozzles located five feet from vehicle surfaces. One nozzle shall be provided for each 10 square feet of vehicle surface, front, rear, sides, and top. Water shall not be directed at any surface below bottom edge of closure. Nozzles shall be standard spray nozzles with single 3.5 MM orifice. Water pressure of spray shall be 60 psi measured at nozzle.

4.6.2.1 Evaluation. Exterior surfaces near hatches and other sealed areas shall be wiped dry before deprocessing for evaluation. Vehicle closure shall be removed from vehicle. Interior of closure and exterior vehicle surfaces within closure shall be examined for any indication of leakage. Interior of vehicle shall be examined for any accumulation of water and if any is present the causes of water leakage shall be determined.

4.6.3 Fuel and oil mixture test. When preservative oil conforming to MIL-L-21260 is reused for processing of fuel tanks, the drained preservative oil from one out of every five vehicles shall be tested to determine conformance to 3.1.12. An American Petroleum Institute hydrometer shall be used to measure dilution of preservative oil with fuel. A.P.I. indicated degrees shall be converted to percent dilution in accordance with the following:

Percent dilution	A.P.I. degrees
0.	23.0°
5.	24.4°
10.	26.4°

5. PREPARATION FOR DELIVERY

This section is not applicable to this specification.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type of processing required (see 1.2).
(c) If inspection of first production processed vehicle is other than specified (see 3.1.1).

Source: https://assist.dla.mil -- Downloaded: 202640-22T02:31Z
Check the source to verify that this is the current version before use.

(d) If relubrication is required (see 3.1.6).
(e) Type of closure required (see 3.1.21).
(f) If OVE saddle is to be used (see 3.1.24).
(g) If draining of residual fuel from tanks is required (see 3.2.3).
(h) Special marking required (see 3.3.3).
(i) If spray test is to be used (see 4.6.2).

6.2 Forms. A copy of the "The Equipment Log Book" and all required forms will be furnished the contractor by the Government at least 30 days before shipment of the equipment as required by the contract delivery schedule (see 3.1.20).

6.3 Safety precautions. Caution should be exercised in handling CO_2 fire extinguisher cylinders. Cylinders should not be dropped, permitted to strike each other, or be handled roughly. Extreme care should be exercised during the reinstallation operation to avoid tripping fire extinguisher control system (see 3.1.23).

Custodian:
Army - MO

Preparing activity:
Army - MO(ATAC)

Project No. 2350-A162

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


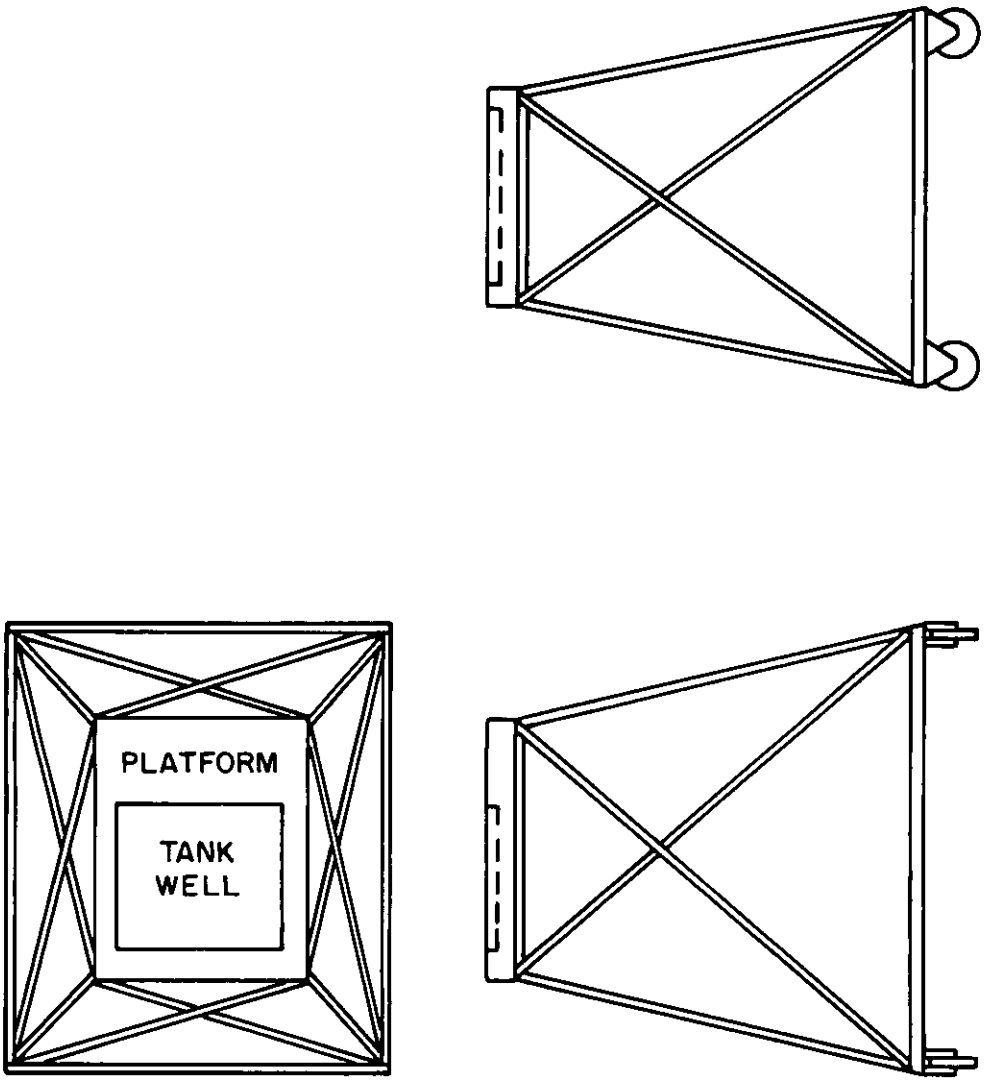


FIGURE 1 - CONTAINER SUPPORT


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

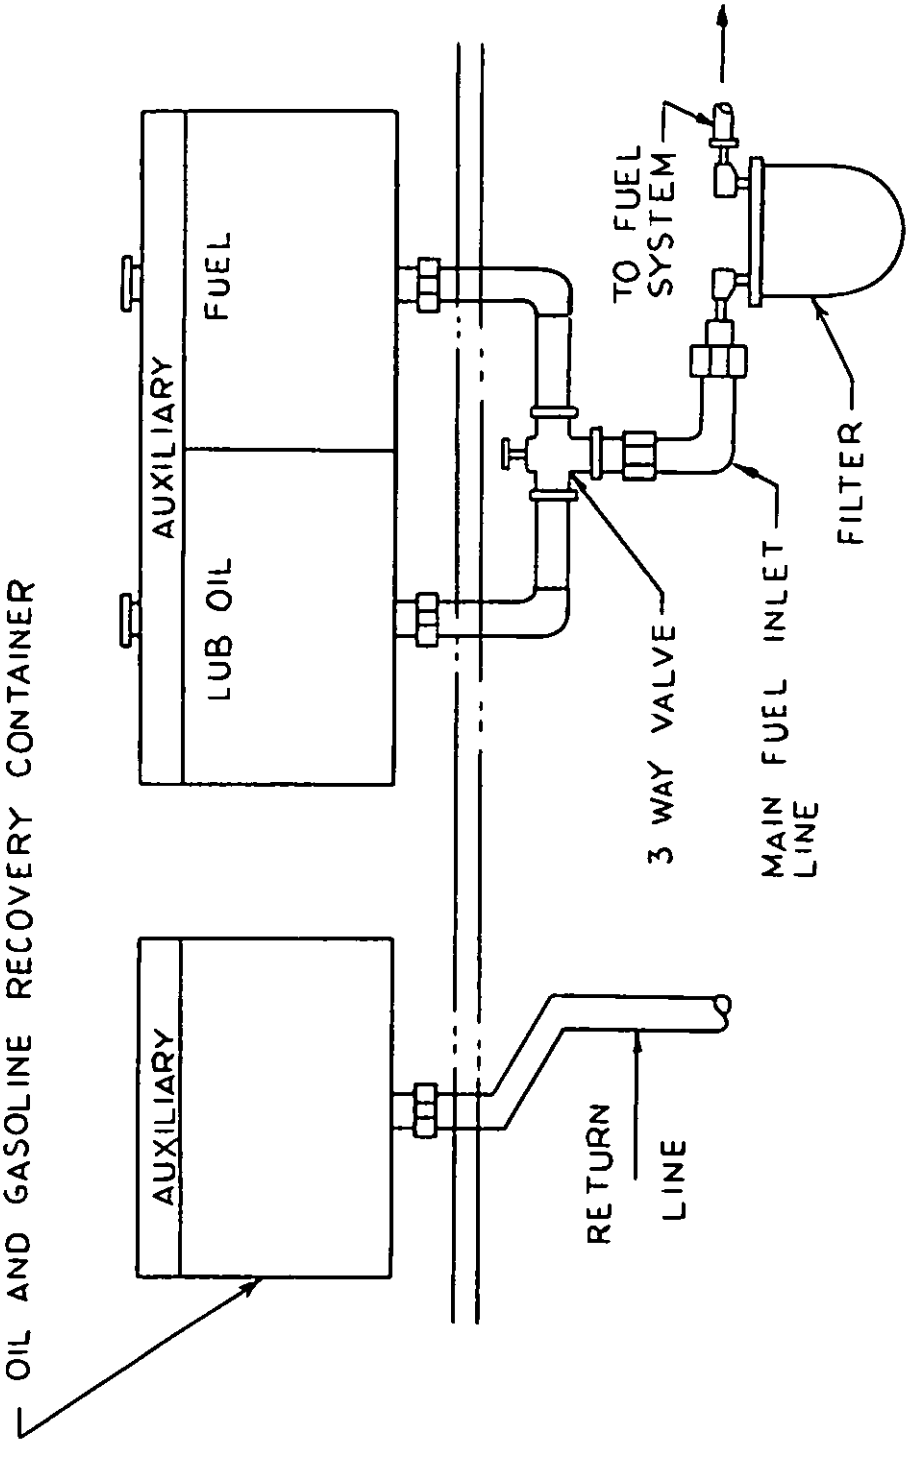

ENGINE PROCESSING

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

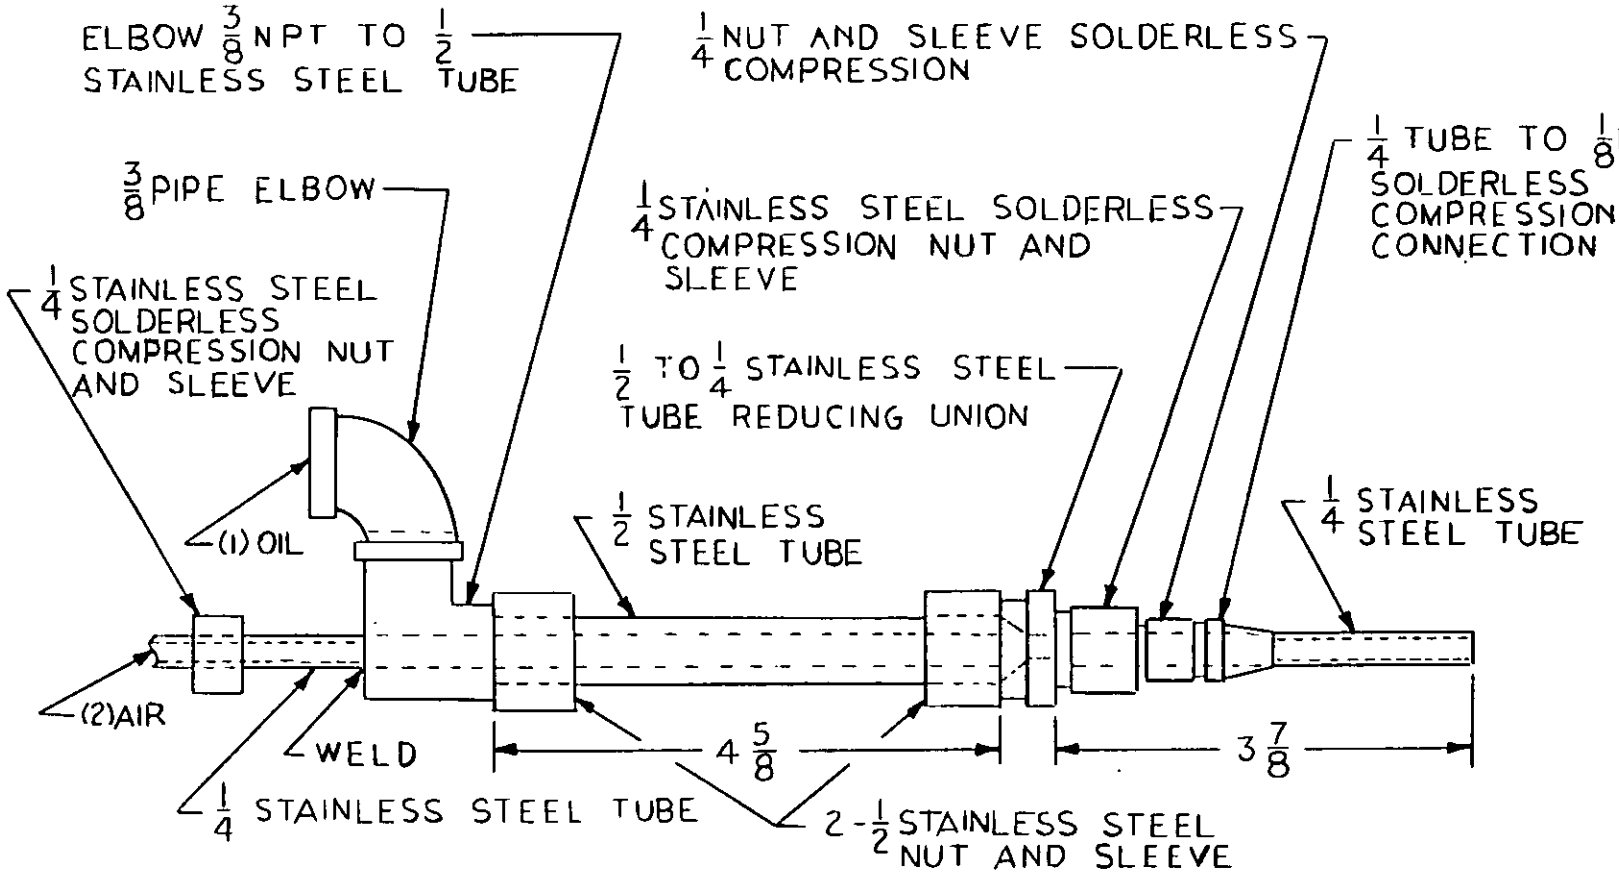

NOTE:

(1) AND (2) CONNECT TO CORRESPONDING LINES ON FIGURE 3


NOTE:

THIS EQUIPMENT HAS PROVEN SATISFACTORY FOR PROCESSING ENGINE THRU SPARK PLUG OPENING

INJECTION DEVICE
FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

1 AIR LINE
2 AIR PRESSURE REGULATOR
3 AIR PRESSURE GAGE
4 SOLENOID VALVE
5 MOISTURE SEPARATOR
6 OIL PRESSURE GAGE
7 TWO DOUBLE TAPED LINES
8 SOLENOID VALVE
9 OIL TANK LEVEL GAGE
10 ELECTRIC JUNCTION BOX
11 ELECTRIC LINE
12 MOTOR 1/4 H.P.
13 SHAFT
14 POSITIVE DISPLACEMENT OIL PUMP
15 OIL TANK

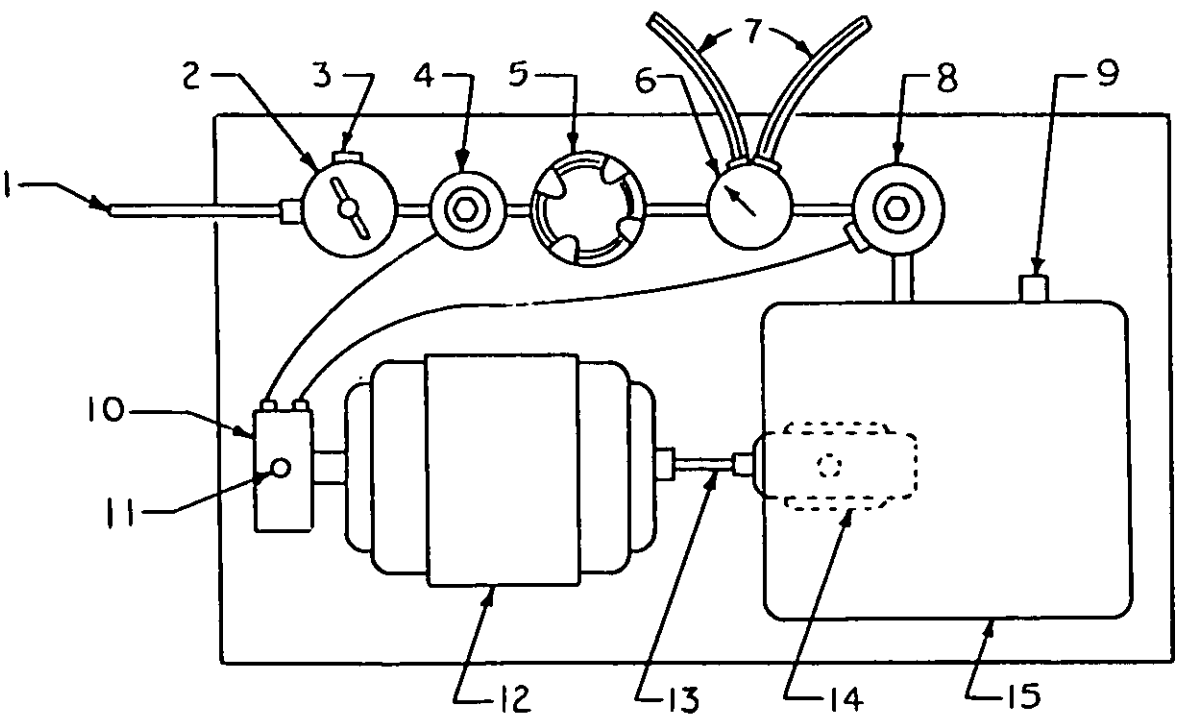

NOTE:
THIS EQUIP. HAS PROVEN SATIS. FOR PROCESSING ENG. THRU SPARK PLUG OPENINGS IN CONJ. WITH FIG. 2

FIGURE 1 - PRESSURE PUMP

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.


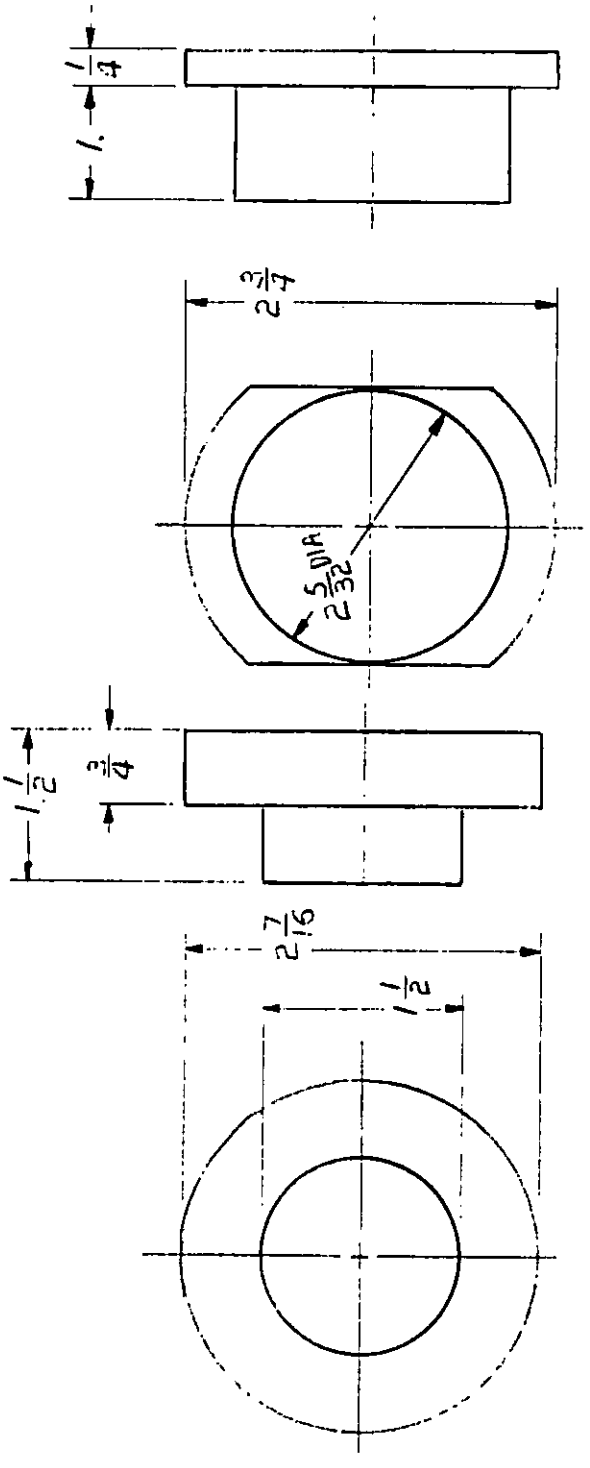


FIGURE 5 - MUZZLE AND BREECH PLUG, GUN 40MM

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

FIGURES 6 THRU 18 NOT USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

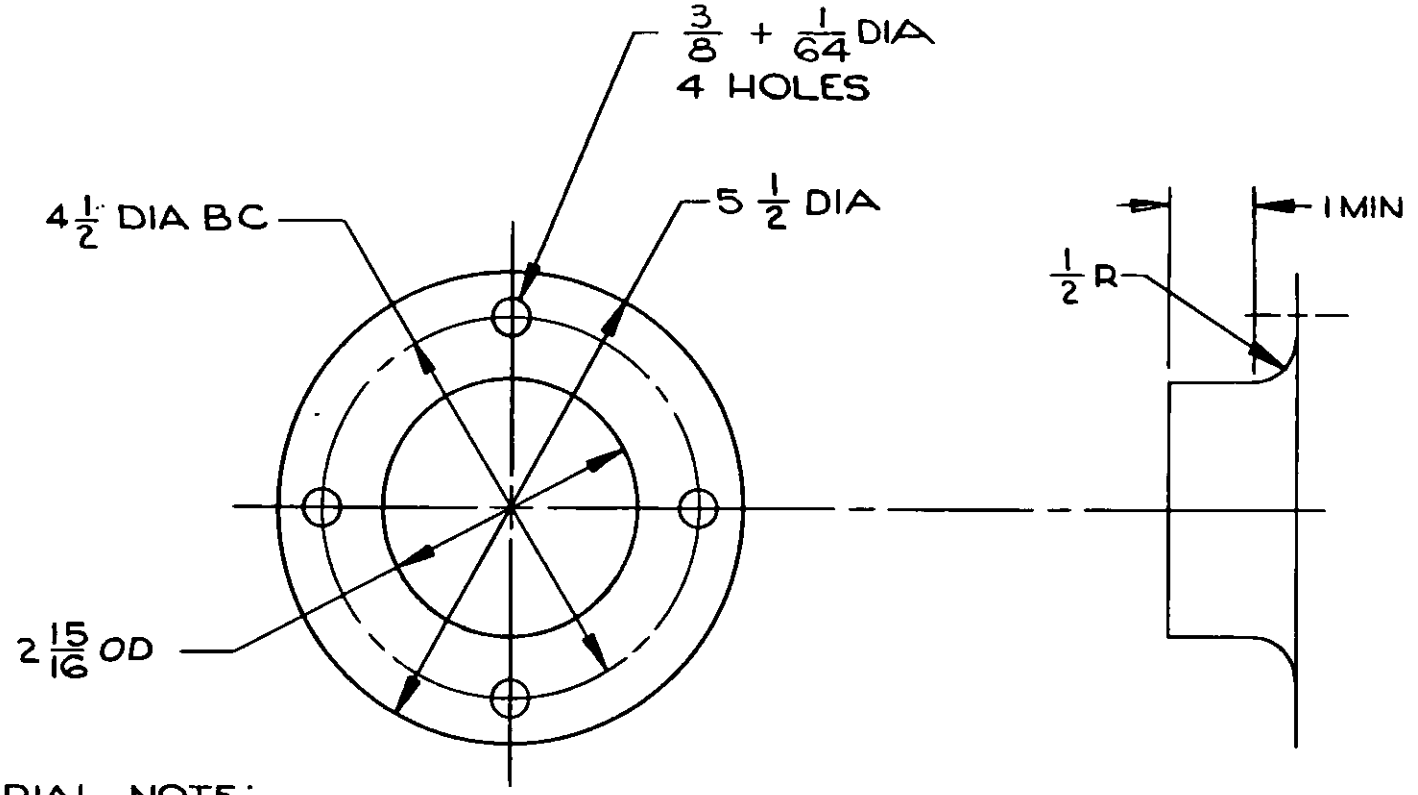


MATERIAL NOTE:
ALUM (AL2) TEMPER O
SPEC QQ-A-250/1
20 TO 22 GAGE
OPTIONAL:
ALUM ALLOY (AL3)
CONDITION ANNEALED
SPEC QQ-A-250/2

VENTILATOR ADAPTER

FIGURE 19

Source: https://assist.dla.mil -- Downloaded: 2026-02-22T02:31Z
Check the source to verify that this is the current version before use.

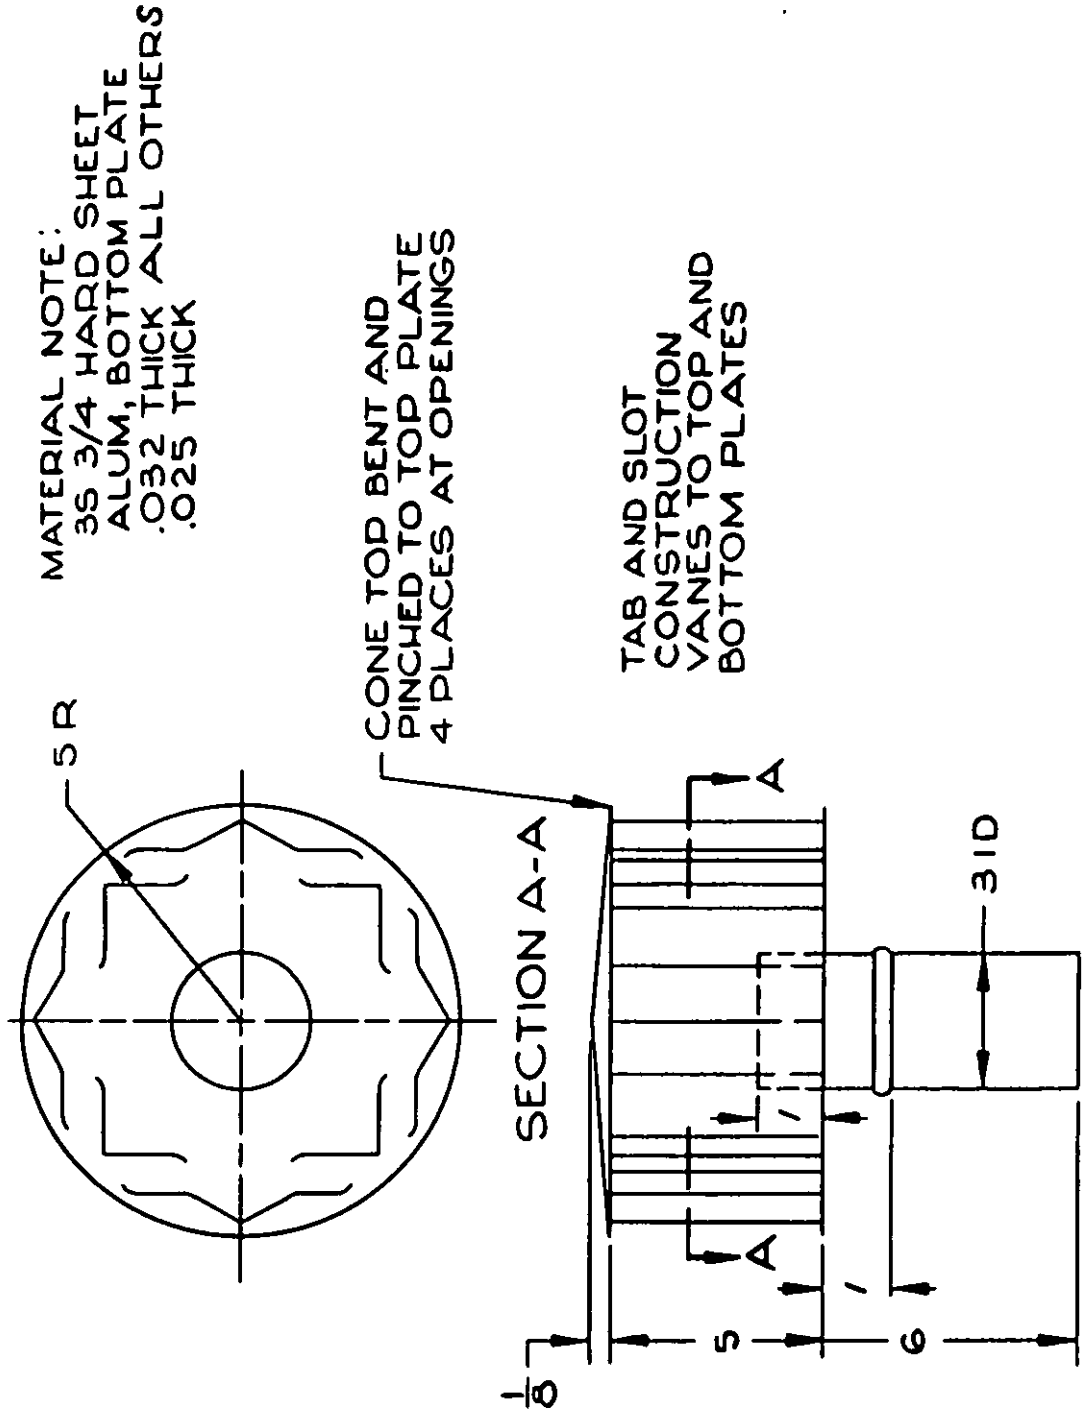

VENTILATOR, SHIPPING & STORAGE

FIGURE 20

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

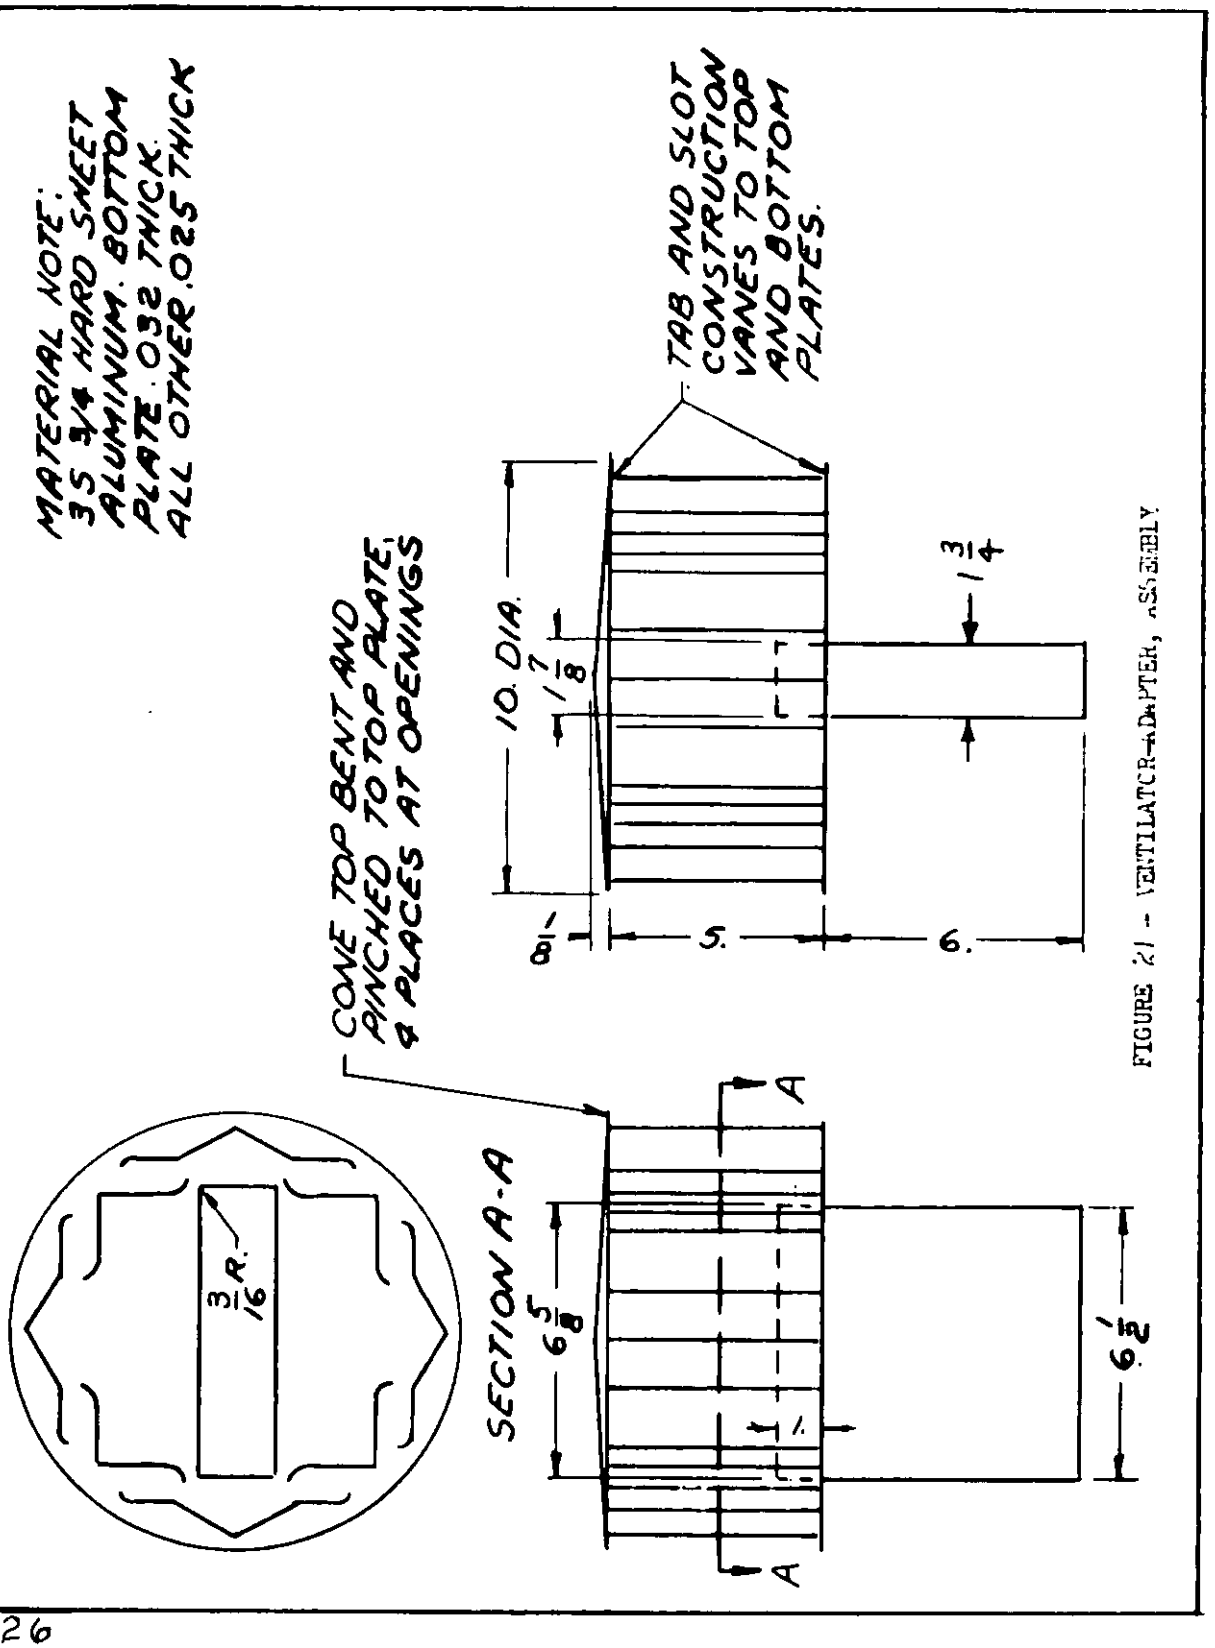


FIGURE 21 - VENTILATOR-ADAPTER, ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

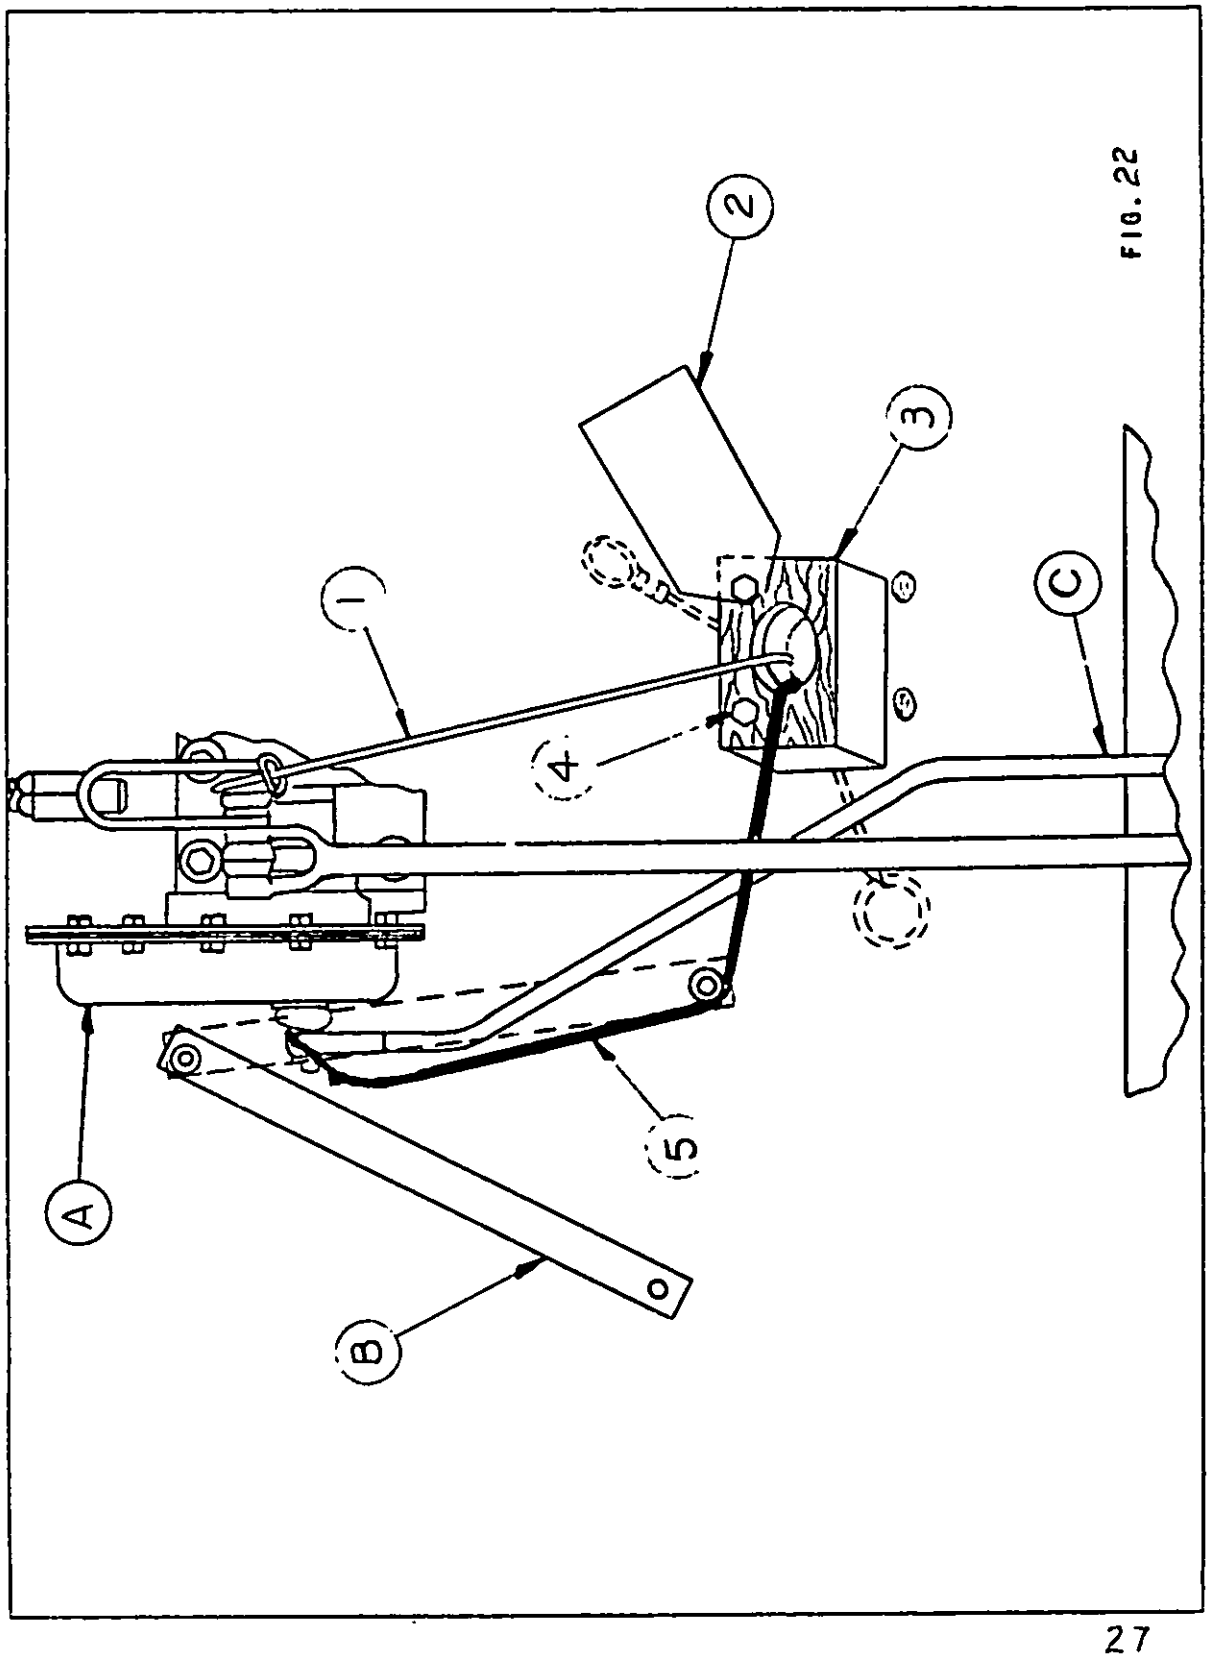


FIG. 22

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

INSTALLATION OF EXTERIOR BRAKING DEVICE,

ITEM NO.	FIG. NO.	PART NAME	REQ'D
1	40	CABLE ASSEMBLY	1
2	42	TAG, WARNING	1
3	43	GUIDE	1

REFERENCE ITEMS


ITEM NO.	PART NAME
A	PARKING BRAKE DRUM
B	PARKING BRAKE GUARD
C	PARKING BRAKE CONTROL ROD

STANDARD HARDWARE ITEMS

ITEM NO.	REQ'D.	PART NAME	SIZE	ORDNANCE NO.
4	2	SCREW, CAP, HEX. HD.	3/8-24 X 2-1/4	MS35294-67
5	1	WIRE	.063 X AS REQUIRED	22W-1656-170

FIG NO.23

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

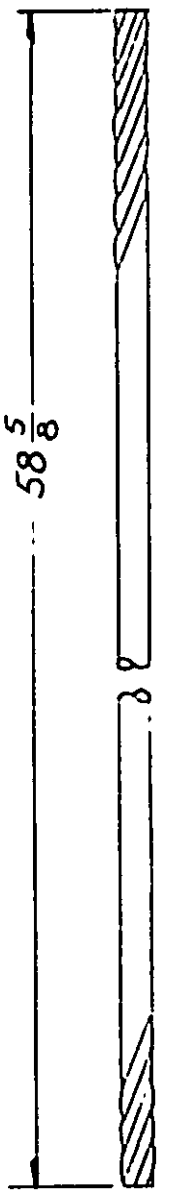

MATERIAL NOTE:

WIRE CABLE (GALVANIZED)
SPEC. MIL-W-1511

3/16 NOMINAL DIA.

TOLERANCE: ± 1/8

FIG. 24

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

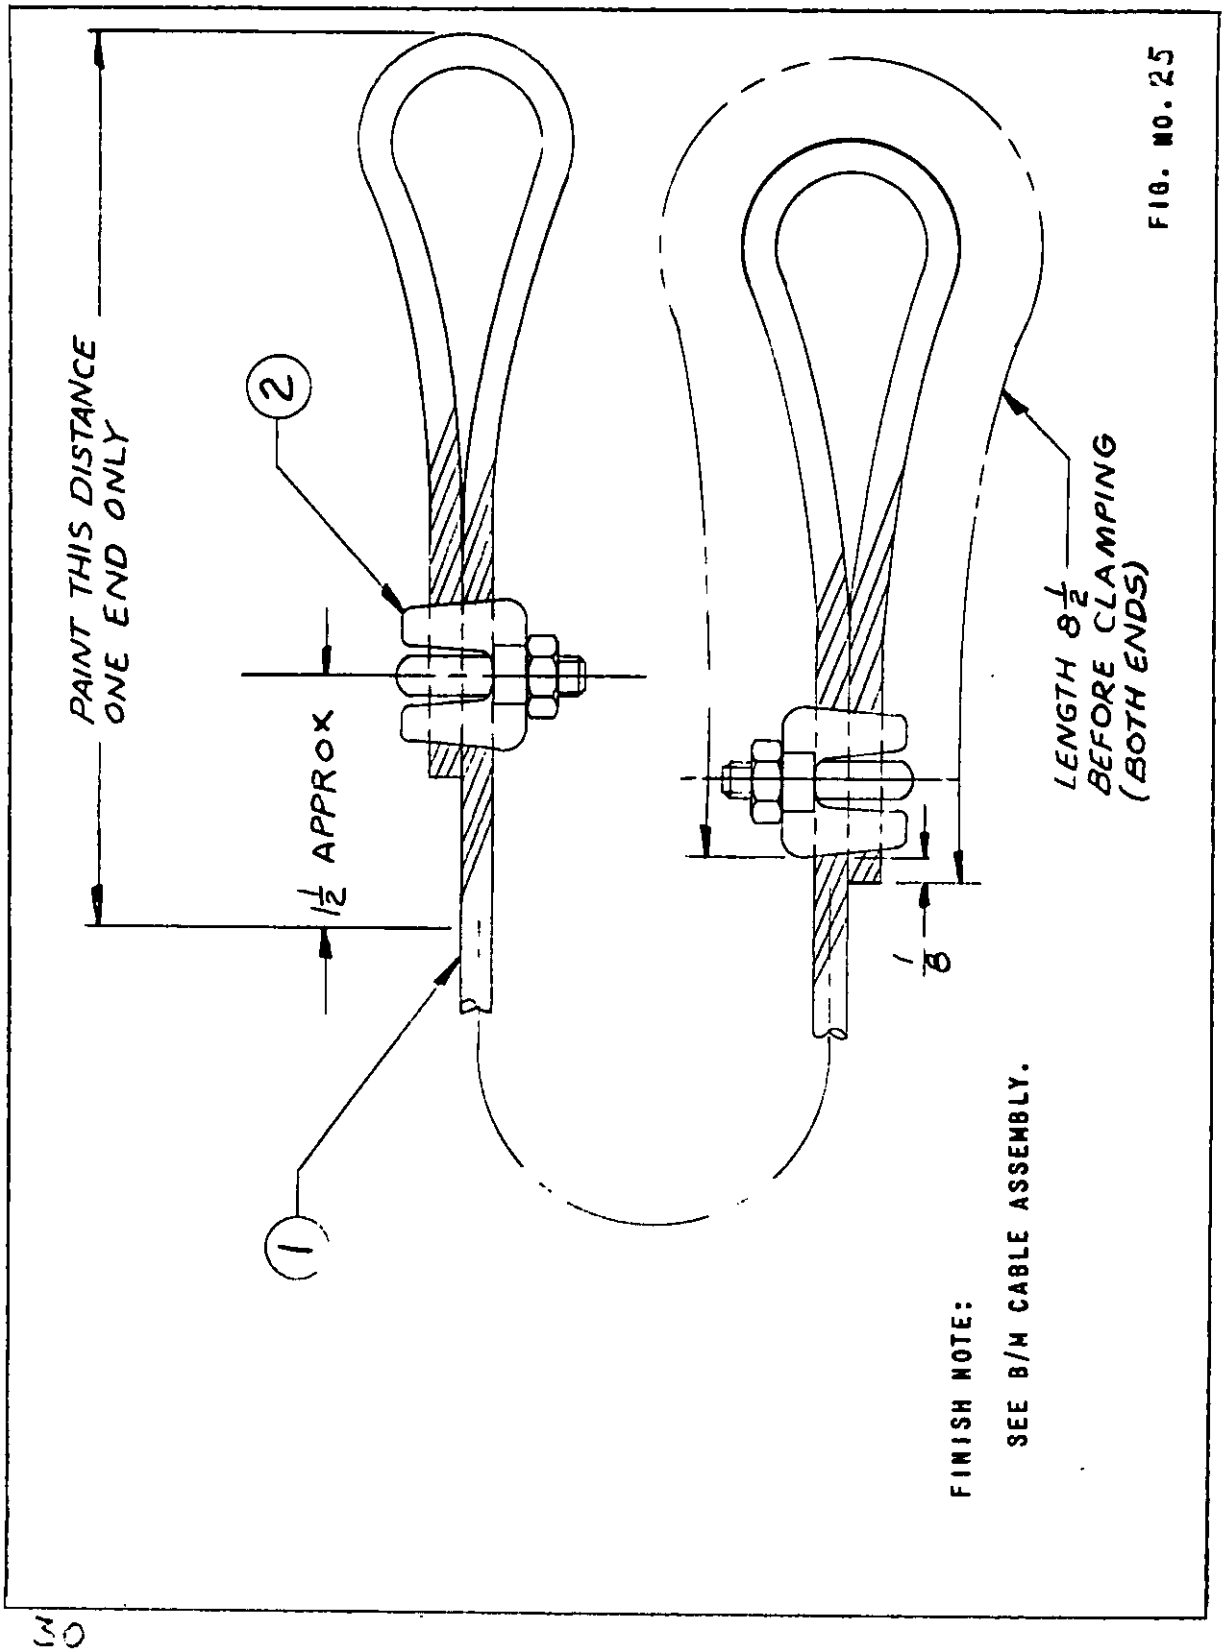


FIG. NO. 25

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

BILL OF MATERIALS - CABLE ASSEMBLY, PARKING BRAKE RESET.

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	39	CABLE	1

STANDARDS HARDWARE ITEMS

ITEM NO.	REQ'D.	PART NAME	SIZE	ORDNANCE NO.
2	2	CLIP, WIRE ROPE	3/16	570501


FINISH NOTE:

ENAMEL GLOSS, YELLOW
CLASS A OR B
SPEC. TT-E-489

TOLERANCE: ± 1/16

FIG. NO. 26

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

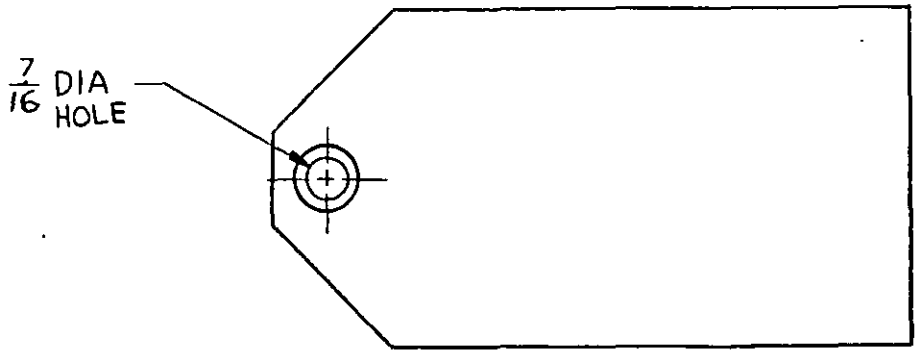

NOTE:

LEGEND TO APPEAR ON TAG:

EXTERIOR BRAKE CONTROL-WARNING

DRIVER - REMOVE THIS BLOCK, WIRE,

AND CABLE BEFORE VEHICLE OPERATION.

MATERIAL NOTE:

TAG, SHIPPING, TYPE B
SIZE NO. 6
SPEC. UU-T-81

FIG. 27

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

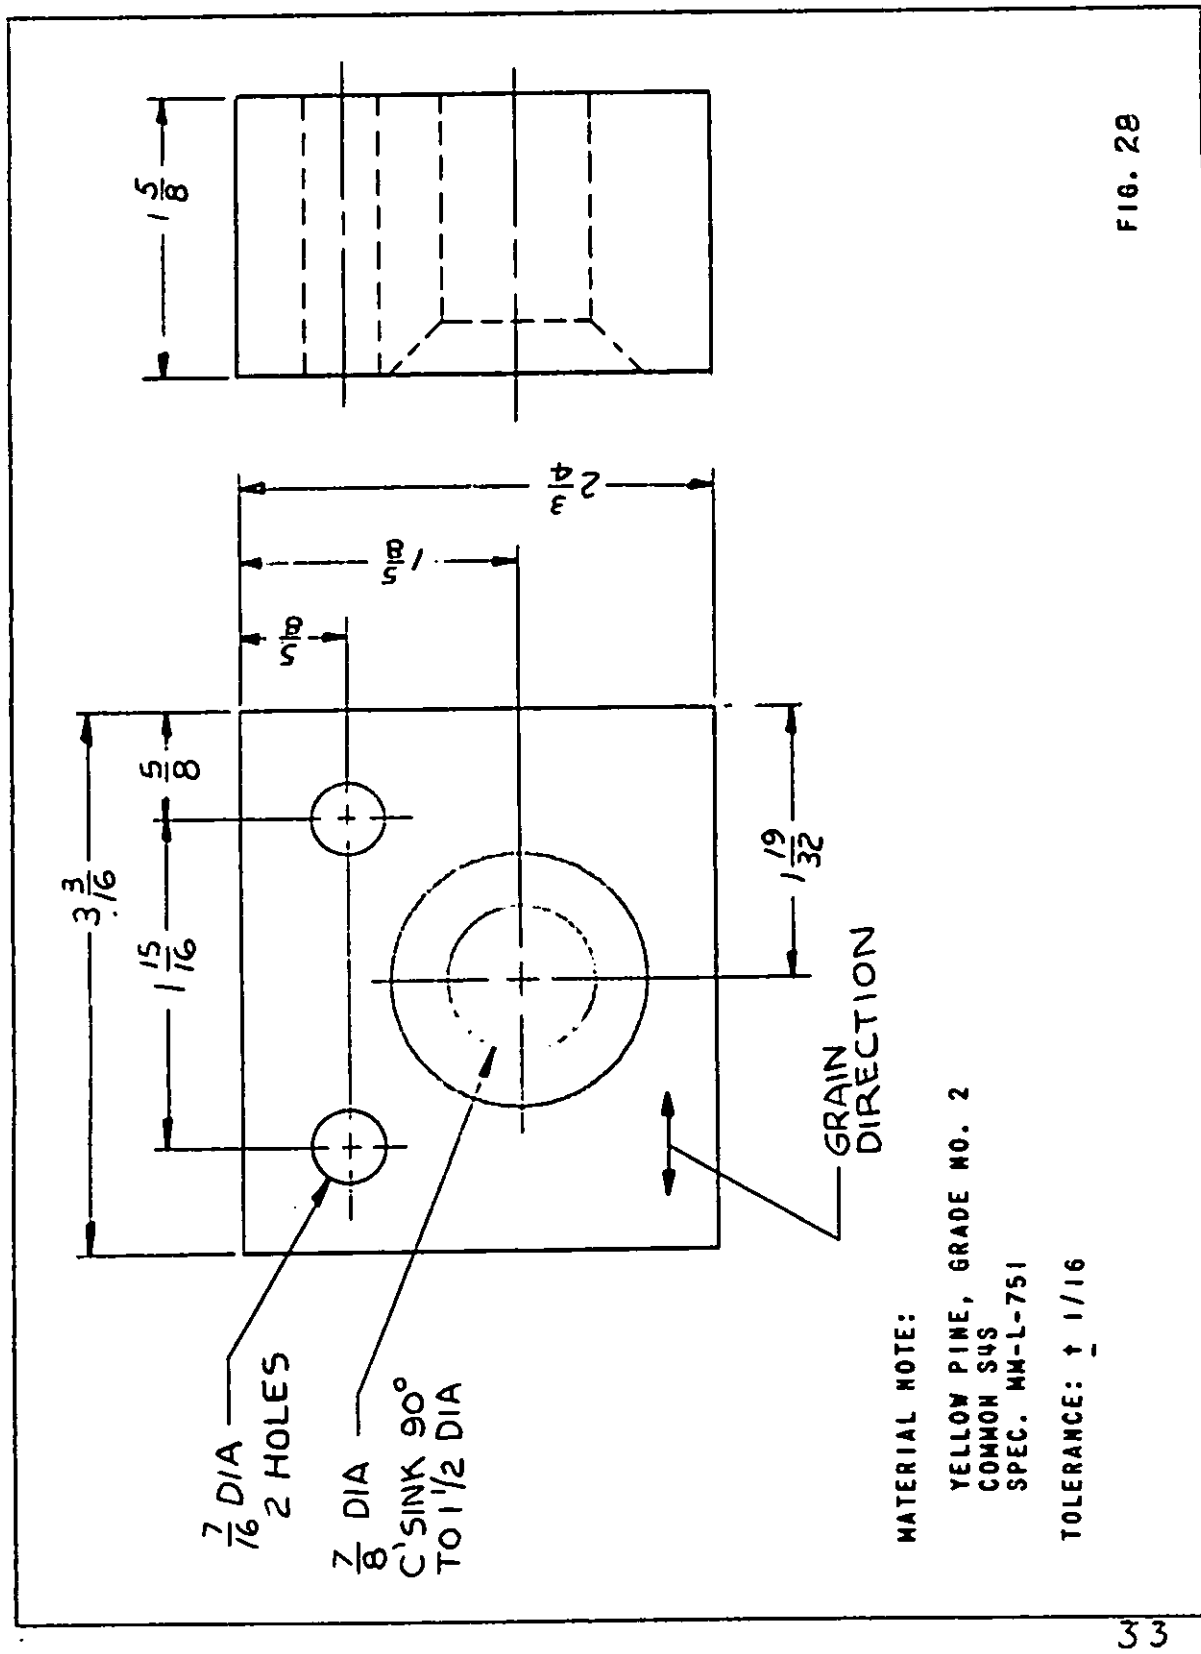


FIG. 28

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - O.V.E. SADDLE ASSEMBLY

FIG.	PART NAME	REQ.	SIZE	MATERIAL	SPEC.
36	SADDLE ASS'Y.	1	ASSEMBLY		
39	BEAM	2	I-3.x5.7 LB/FT.x68 5/8	STEEL	MIL-S-13281
40	FLOOR	1	2x6.x 59 1/8 LG	WOOD	MM-L-751
41	FLOOR		2X6.X 82 1/8 LG	WOOD	MM-L-751
42	WASHER, BEVEL	24	FOR 3/8 BOLT, STD I BEAM		
44	BRACKET ASS'Y.	2	ASSEMBLY		
45	ANGLE	2	L-3.x5.x 1/4 x 3 1/4	STEEL	MIL-S-13281
46	PLATE, BOTTOM	2	1/4x 2 3/4x 3 1/4	STEEL	QQ-S-633
47	STIFFENER	2	1/4 x 2 1/2 x 3 1/4	STEEL	QQ-S-633
49	BRACKET ASS'Y.	2	ASSEMBLY		
50	SUPPORT, ANGLE	2	L-3.x3.x 1/2 x 17 11/32	STEEL	MIL-S-13281
51	PLATE, TOP	2	1/2 x 3. x 5. LG.	STEEL	QQ-S-633
52	PLATE, BOTTOM	2	1.x3. x 2 1/2 LG.	STEEL	QQ-S-633

STANDARD HARDWARE

PART NAME	TOTAL REQ.	SIZE	ORD. PART NO.
* SCREW, CAP	2	5/8-11 UNC-2A x 2 LG.	MS35303-164
* SCREW, CAP	2	5/8-11 UNC-2A x 2 1/2 LG.	MS 35303-166
* SCREW, CAP	8	3/8-16 UNC-2A x 1 1/2 LG.	MS 35303-64
BOLT, CARRIAGE	16	3/8-16 UNC-2A x 2 1/2 LG.	101540
NUT, HEX.	8	3/8-16 UNC-2B	MS 35691-602
NUT, SQ.	16	3/8-16 UNC-2B	120374
WASHER, LOCK	24	3/8 DIA.	MS 35337-27

* MUST BE 300 M-STEEL DUE TO FUNCTIONAL REQUIREMENTS.

FIGURE 29

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST-INSTALLATION O.V.E. SADDLE

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	38	O.V.E. SADDLE ASSEMBLY	1

STANDARD HARDWARE

	REQ'D.	PART NAME	SIZE	
2	2	*SCREW, CAP HEX. HD.	5/8-11 UNC-2A x 2. LG.	MS 35303-164
3	2	*SCREW, CAP HEX. HD.	5/8-11 UNC-2A x 2 1/2 LG.	MS 35303-166

* MUST BE 300 M-STEEL DUE TO FUNCTIONAL REQUIREMENTS

NOTE:

1 TIGHTEN ALL BOLTS ON O.V.E. SADDLE AFTER INSTALLATION ON VEHICLE.

FIGURE 30

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


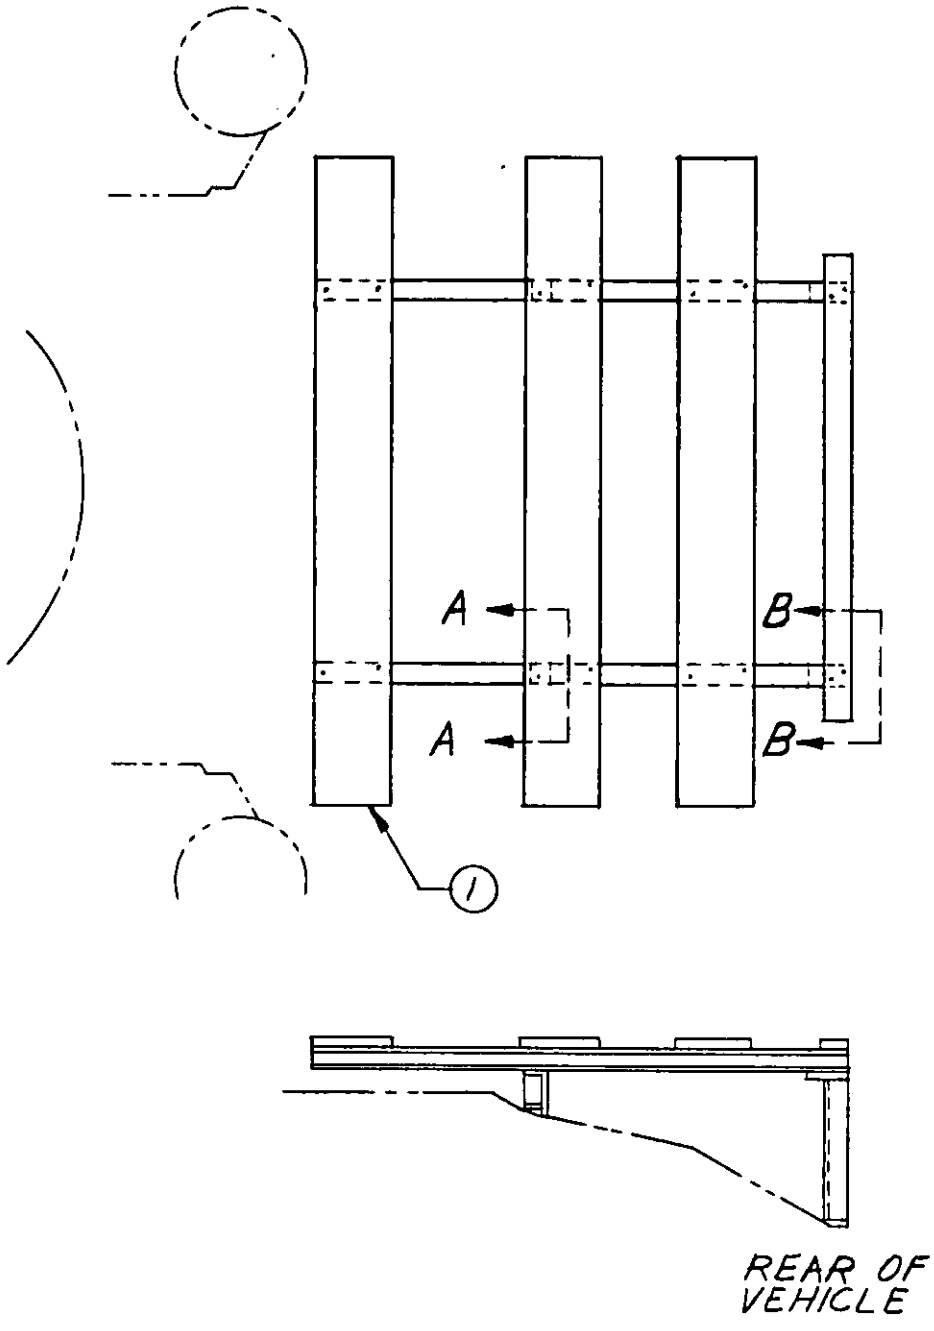


FIGURE 31
INSTALLATION
O.V.E. SADDLE

NOTE:
SEE NOTE I, FIG. 29

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

FIGURE 32

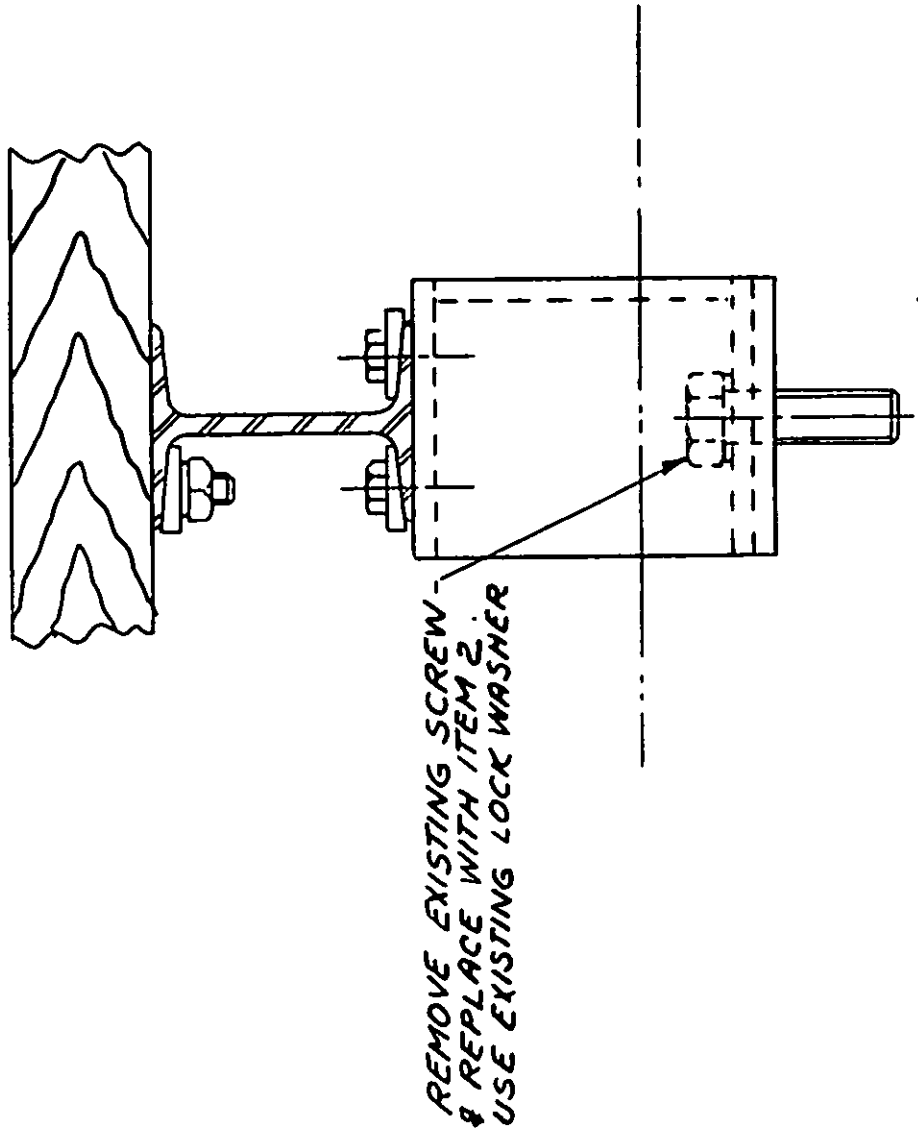

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

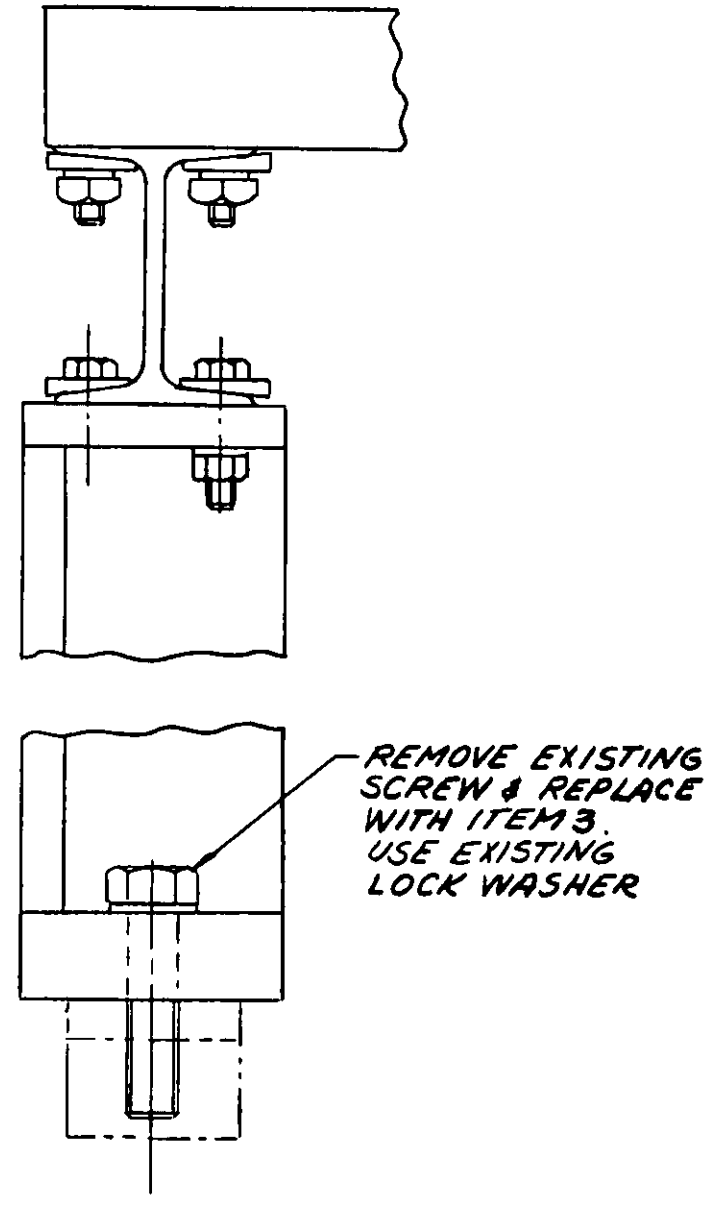


FIGURE 33

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - O.V.E. SADDLE ASSEMBLY

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	39	BEAM	2
2	40	FLOOR	1
3	41	FLOOR	3
4	44	BRACKET ASSEMBLY, FRONT	1
5	49	BRACKET ASSEMBLY, REAR	1
6	42	WASHER, BEVEL	1

STANDARD HARDWARE

ITEM NO.	REQ'D.	PART NAME	SIZE	ORDNANCE PART NO.
7	8	* SCREW, CAP HEX. HD.	3/8-16 UNC-2A x 1 1/2 LG	MS35303-64
8	8	NUT, HEX.	3/8-16 UNC-2B	MS35691-602
9	16	BOLT, CARRIAGE	3/8-16 UNC-2A x 2 1/2 LG	101540
10	16	NUT, SQUARE	3/8-16 UNC-2B	120974
11	24	WASHER, LOCK	3/8 DIA.	MS35337-27

* MUST BE 300M-STEEL DUE FUNCTIONAL REQUIREMENTS.

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL
CLASS A
SPEC. MIL-S-13281
I-BEAM 3. x 5.7 LB/FT.

FIGURE 34

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

MATERIAL NOTE:

II LUMBER DOUGLAS FIR
NO. 2 DIMENSION OR BETTER
SPEC. MM-L-751
COMMERCIAL SIZE 2. x 6.

III LUMBER DOUGLAS FIR
NO. 2 DIMENSION OR BETTER
SPEC. MM-L-751
COMMERCIAL SIZE 2. x 10.

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

II ENAMEL SEMI-GLOSS COLOR O.D
TYPE OPTIONAL
SPEC. TT-E-485 OR TT-E-529


PAINT ALL OVER - 2 COATS

NOTE:

I ALL BOLTS TO BE LEFT LOOSE

FIGURE 35


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

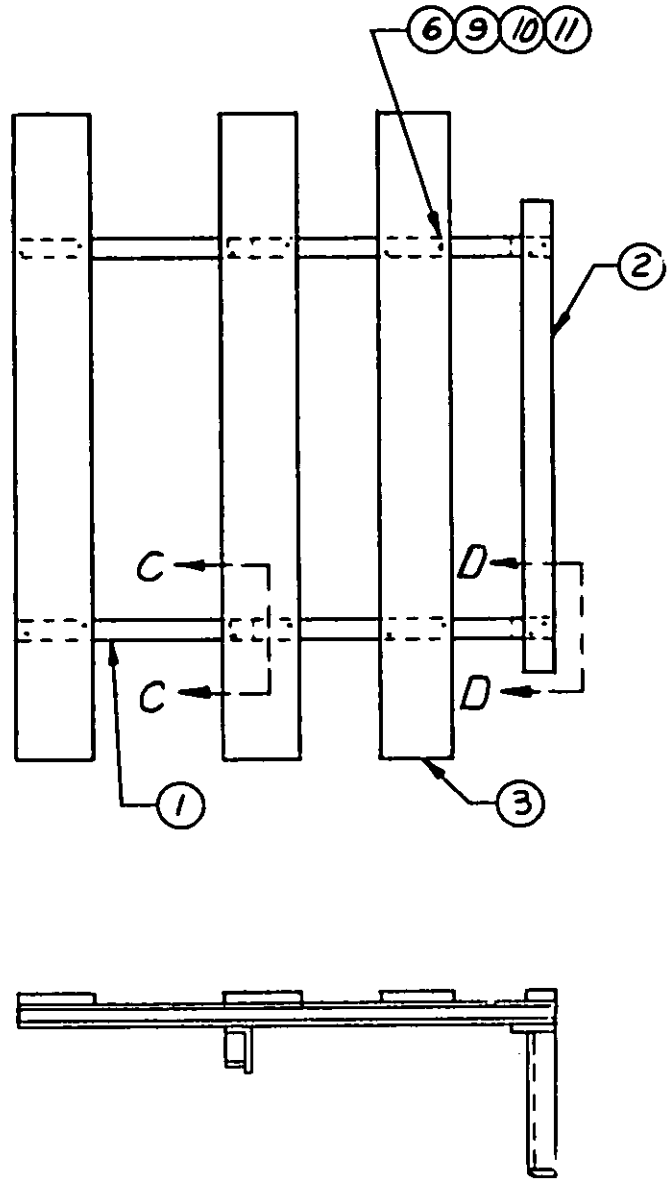

NOTE:
SEE NOTE I, FIG. 35

FIGURE 36
O.V.E. SADDLE ASSEMBLY


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

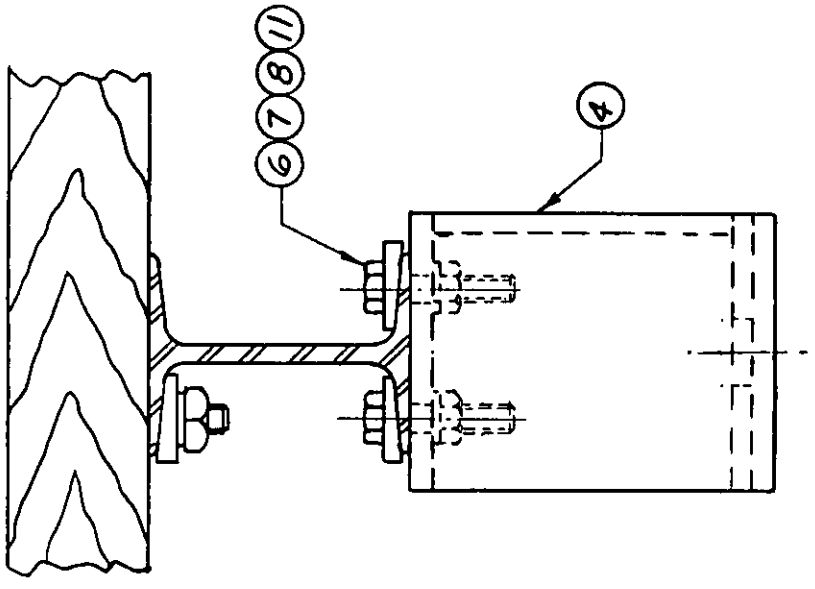

SECTION C-C
TYP. 2 PLACES

FIGURE 37

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

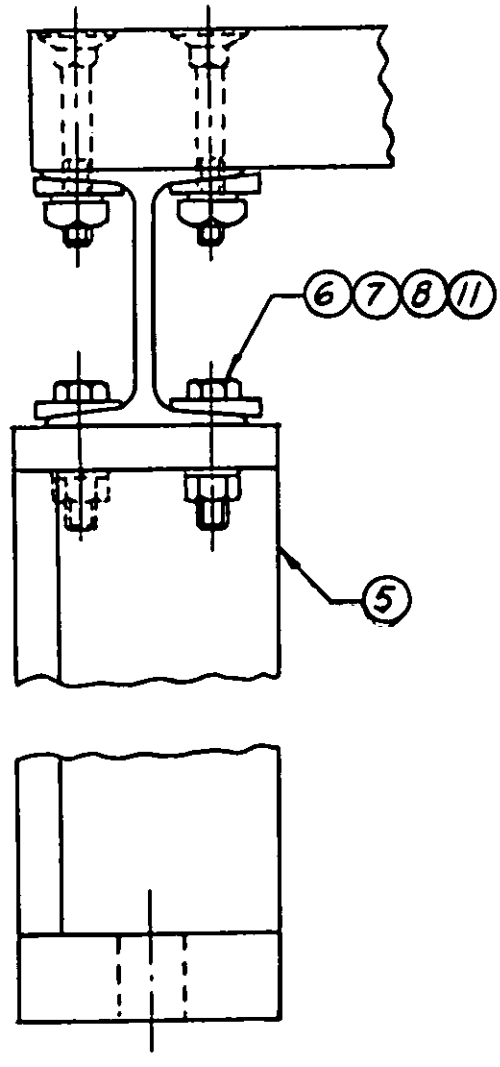

VIEW D-D
TYP. 2 PLACES

FIGURE 38

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

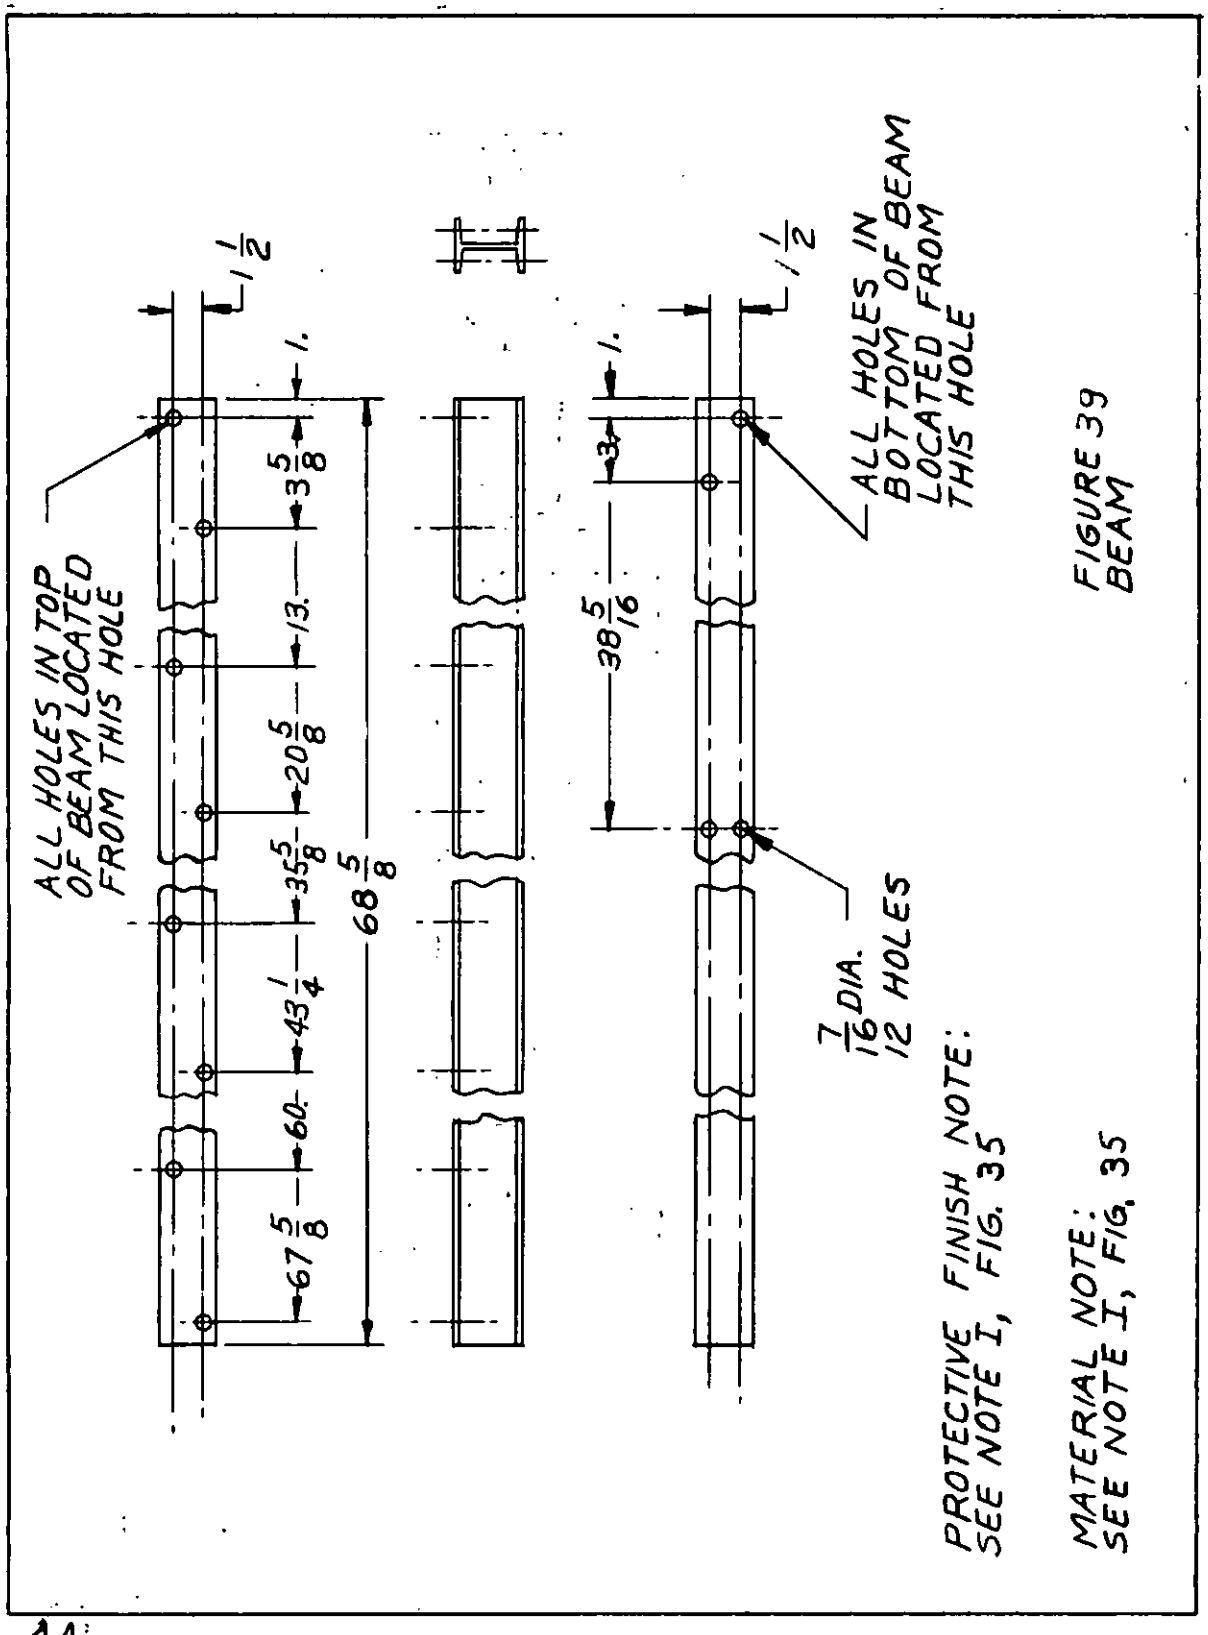


FIGURE 39
BEAM

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

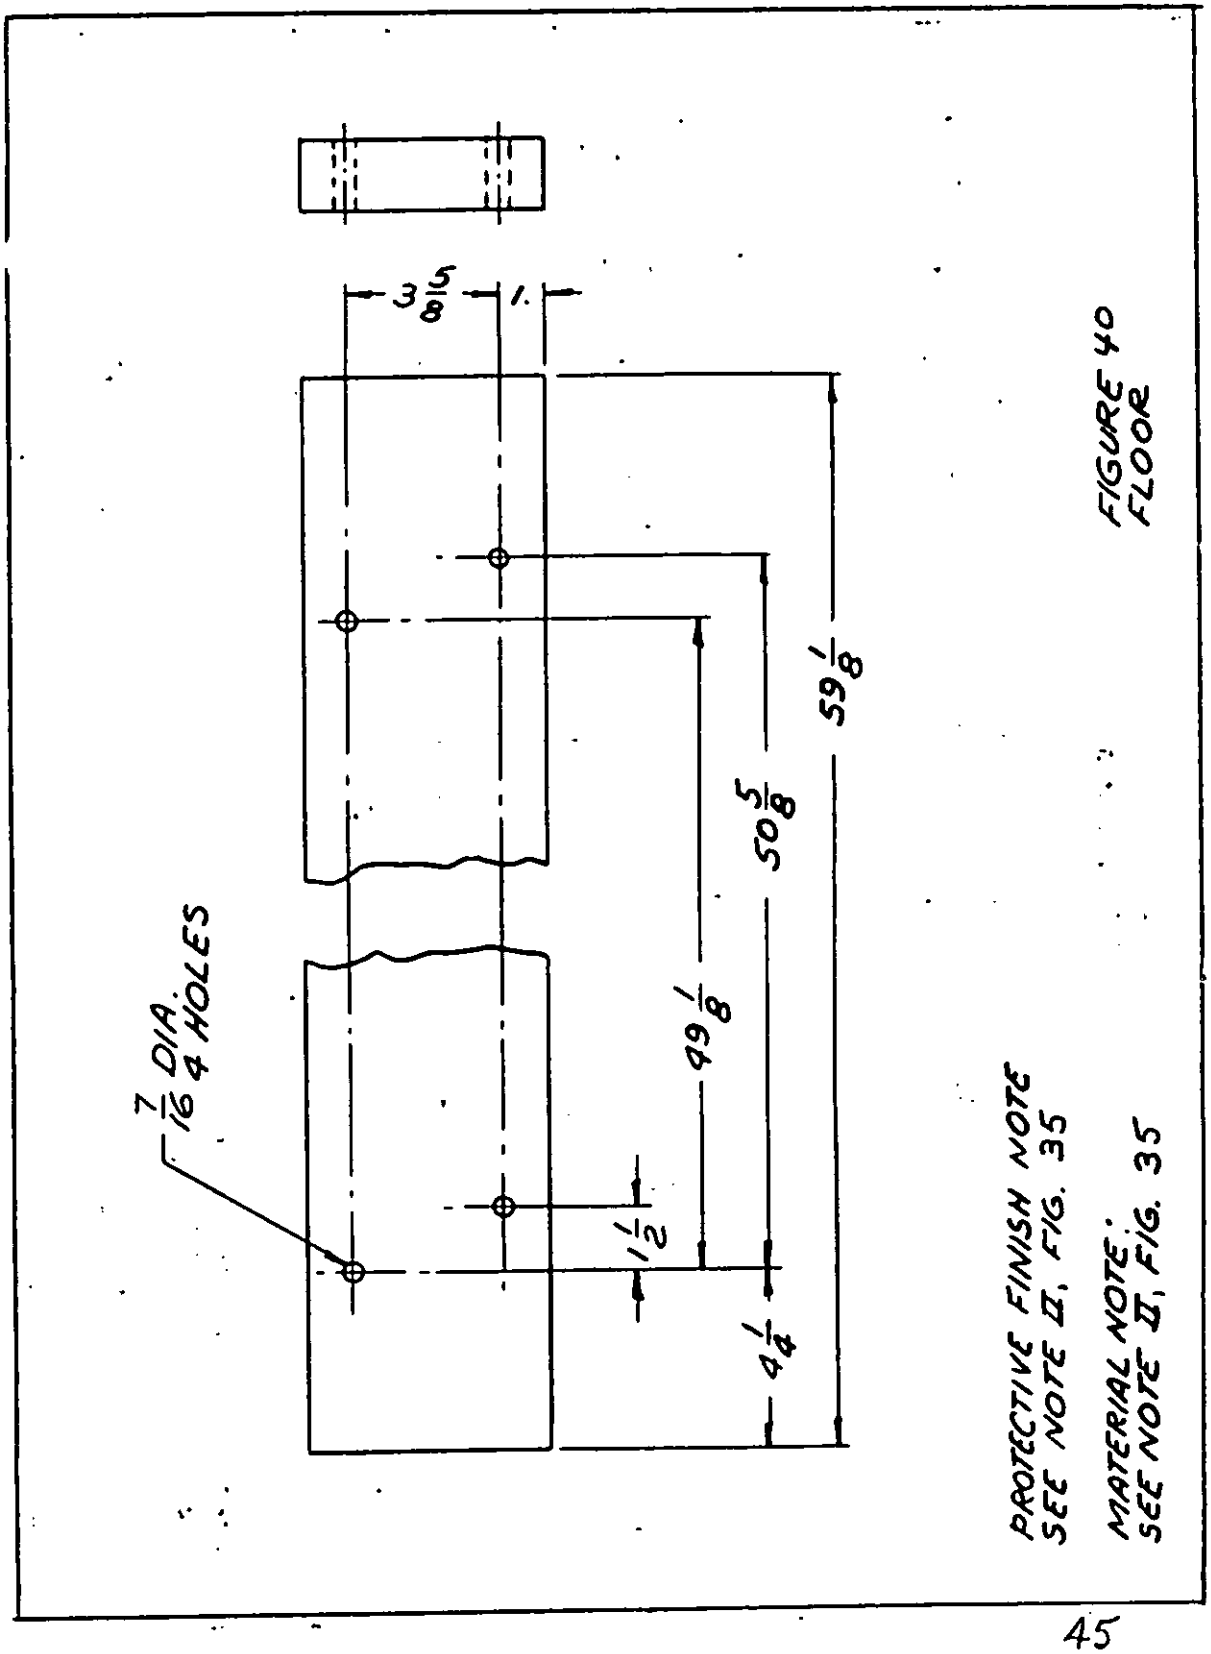


FIGURE 40
FLOOR

PROTECTIVE FINISH NOTE
SEE NOTE II, FIG. 35

MATERIAL NOTE:
SEE NOTE II, FIG. 35

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

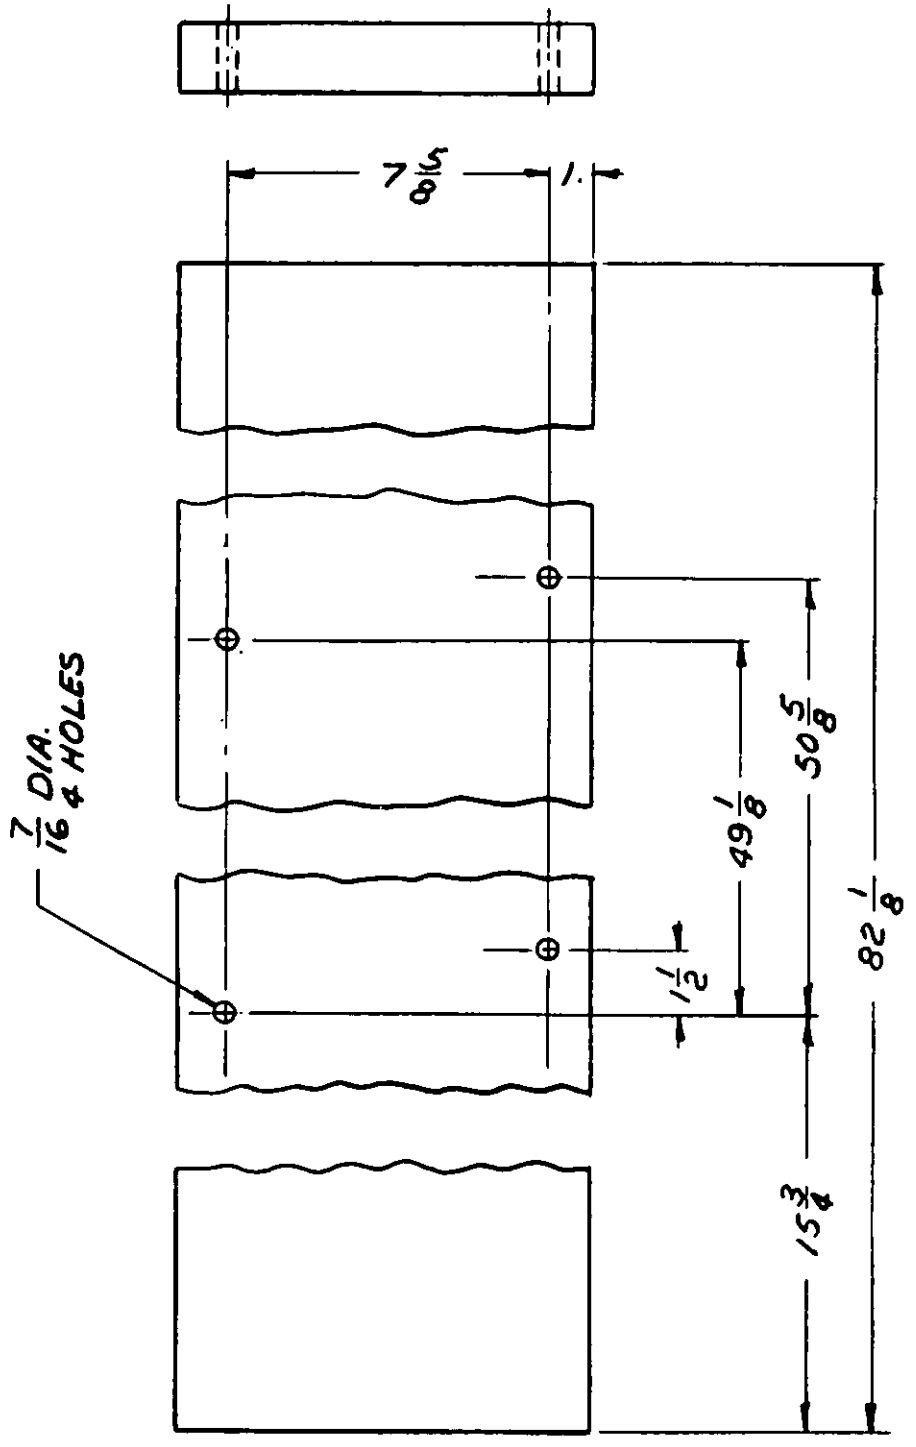



FIGURE 41
FLOOR

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 35

MATERIAL NOTE:
SEE NOTE III, FIG. 35

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

FIGURE 42
3/8 DIA. BEVELED WASHER

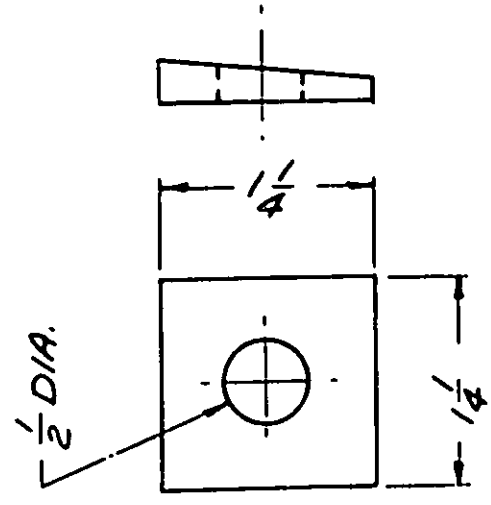

ALL DIMENSIONS ARE APPROX.

FOR STANDARD I-BEAM

COMMERCIALLY AVAILABLE FROM ANY SOURCE

MATERIAL
STEEL

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - BRACKET ASSEMBLY, FRONT

ITEM NO.	FIG. NO	PART NAME	REQ'D.
1	45	ANGLE	1
2	46	PLATE, BOTTOM	1
3	47	STIFFENER	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL
CLASS A
SPEC. MIL-S-13281
3. x 5. x 1/4 ANGLE

II STEEL-CARBON FS1010 THRU FS1025
SPEC. QQ-S-633

WELDING NOTE - STEEL


I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 43

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

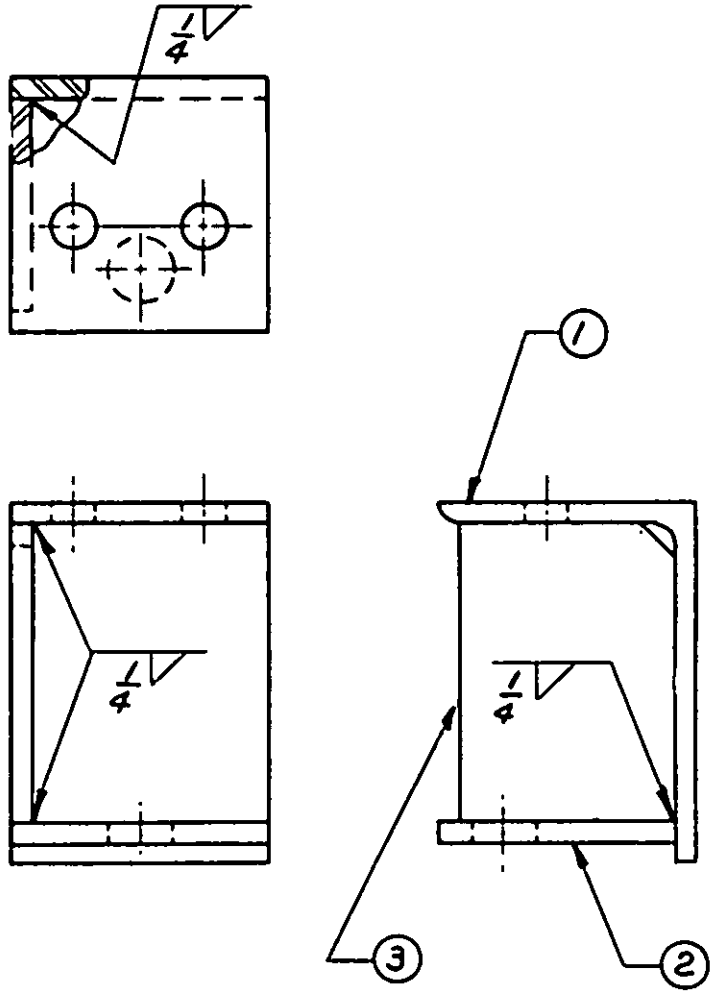

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 43

WELDING NOTE:
SEE NOTE I, FIG. 43

FIGURE 44
BRACKET ASSEMBLY,
FRONT

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

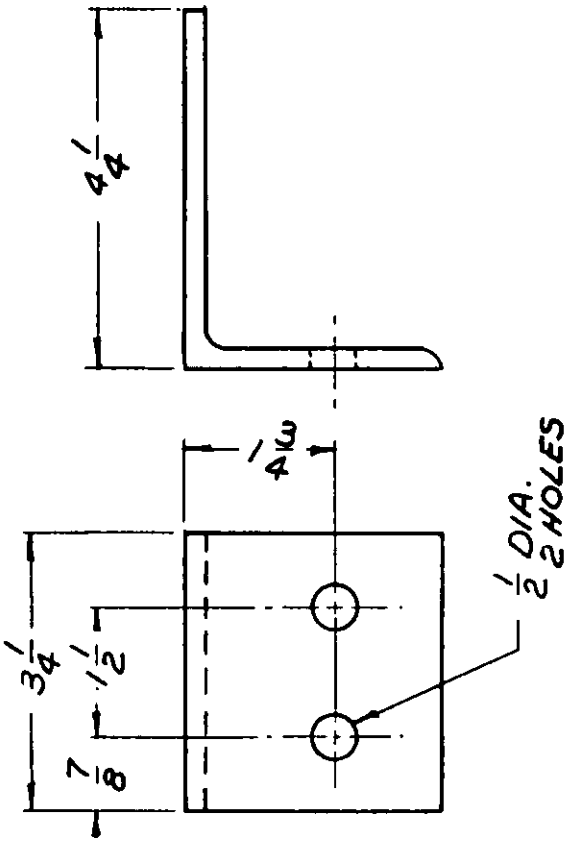


FIGURE 45
ANGLE

MATERIAL NOTE:
SEE NOTE I, FIG. 43

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

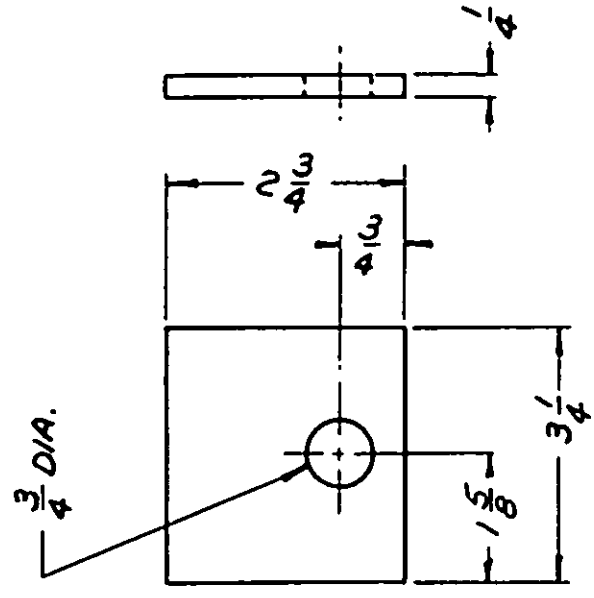


FIGURE 46
PLATE, BOTTOM

MATERIAL NOTE:
SEE NOTE II, FIG. 93

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

MATERIAL NOTE:
SEE NOTE II, FIG. 43

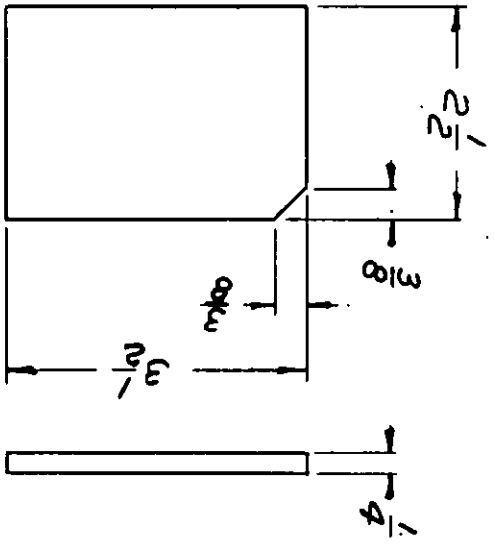


FIGURE 47
STIFFENER

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - BRACKET ASSEMBLY, REAR

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	50	SUPPORT, ANGLE	1
2	51	PLATE, TOP	1
3	52	PLATE, BOTTOM	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL
CLASS A
SPEC. MIL-S-13281
3. x 3. x 1/2 ANGLE

II STEEL - CARBON FS1010 THRU FS1025
SPEC. QQ-S-633

WELDING NOTE - STEEL


I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 48

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

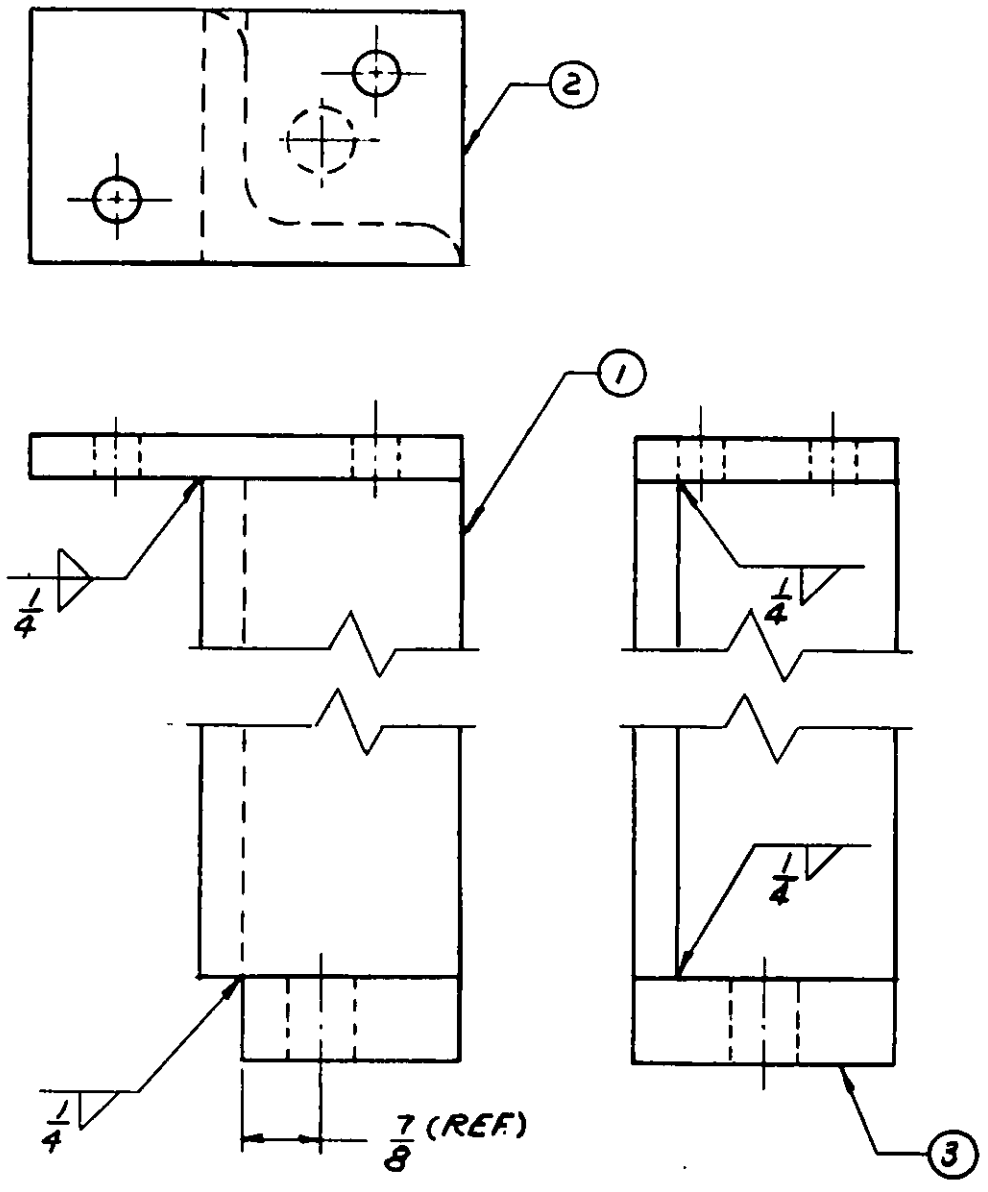

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 48

WELDING NOTE:
SEE NOTE I, FIG. 48

FIGURE 49
BRACKET ASSEMBLY, REAR

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

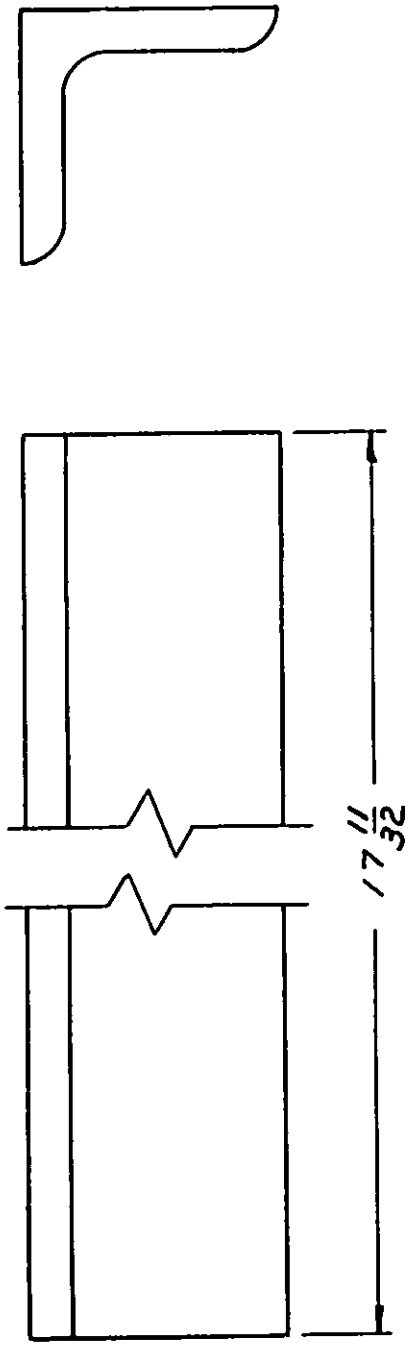


FIGURE 50
SUPPORT, ANGLE

MATERIAL NOTE:
SEE NOTE 1, FIG. 48

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

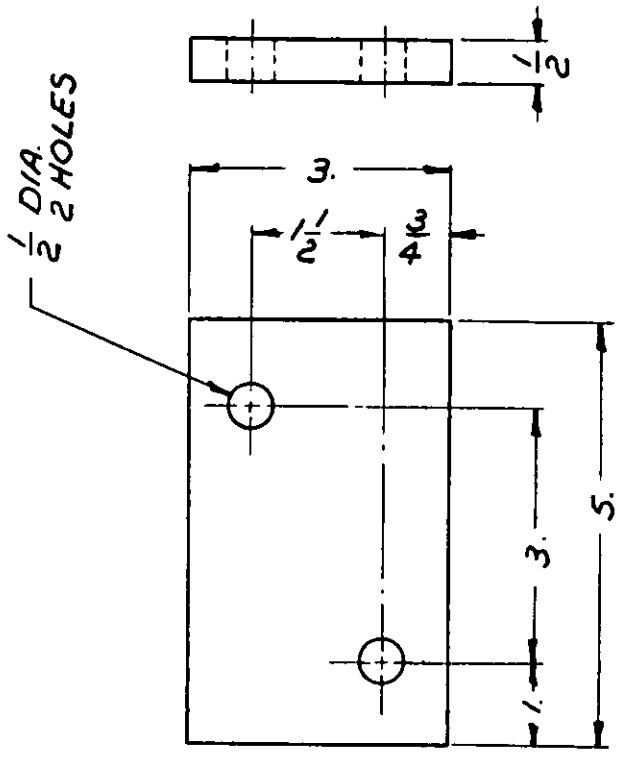


FIGURE 51
PLATE, TOP

MATERIAL NOTE:
SEE NOTE II, FIG. 48

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


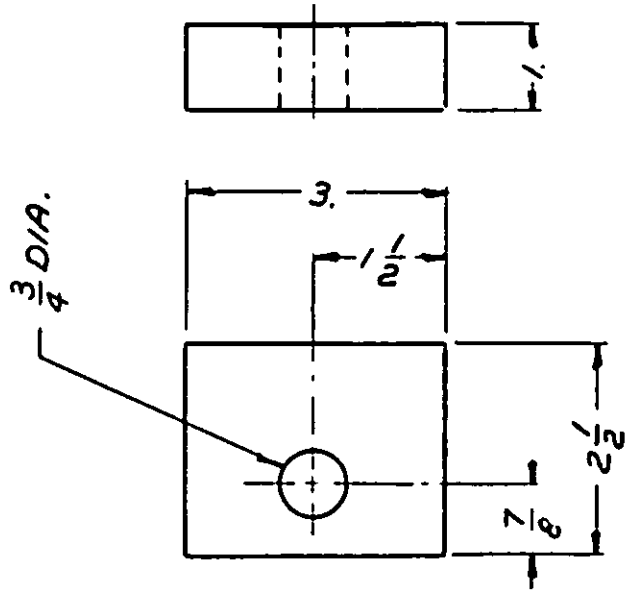


FIGURE 52
PLATE, BOTTOM

MATERIAL NOTE:
SEE NOTE II, FIG. 48

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

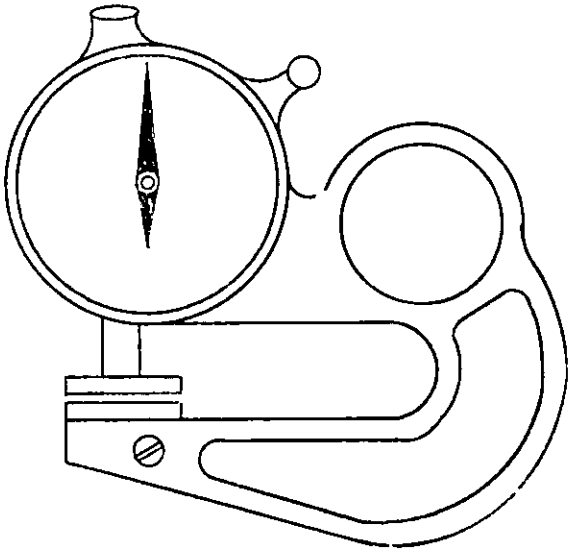

DIAL	0 - 50 - 100
RANGE	0.3125
GRADUATIONS	0.001
SPECIAL ANVILS	3/4 DIA.
SPECIAL THROAT	2 INCH

FIGURE 53 - DIAL MICROMETER

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

APPENDIX I

REQUIREMENTS FOR ASSEMBLY,
INSTALLATION, REMOVAL, DISASSEMBLY
AND PRESERVATION, PACKAGING AND
PACKING OF VEHICLE CLOSURE FOR
M42, M42A1 VEHICLE

10. SCOPE

10.1 This appendix covers requirements for fabrication, assembly, installation, removal and disassembly of the vehicle closure (see 3.1.21.2); and the preservation, packaging and packing of the disassembled vehicle closure.

20. APPLICABLE DOCUMENTS

20.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this appendix to the extent specified herein.

SPECIFICATIONS

Federal

V-F-106	-	Fasteners, Slide, Interlocking.
V-T-295	-	Thread, Nylon.
QQ-A-225	-	Aluminum Alloy Bar, Rod, Wire or Special Shapes; Rolled, Drawn, or Cold Finished; General Specification For.
QQ-T-00825	-	Tube, Steel, Alloy; Mechanical, Round, Seamless and Welded.
TT-W-568	-	Wood preservative; Creosote - Petroleum, Solution.

Military

MIL-W-530	-	Webbing and Tape, Textile, Cotton, General Purpose, Natural or in Colors.
MIL-C-20696	-	Cloth, Coated, Nylon, Waterproof.
MIL-S-46049	-	Steel, Carbon, Strip, Cold Rolled, Hardened and Tempered Spring Quality.

STANDARDS

Federal

FED-STD-595	-	Colors.
FED-STD-751	-	Stitches, Seams, and Stitchings

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the processing activity or as directed by the contracting officer.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

20.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Packaging Data Sheets
Sheets 1 through 11 - Kit, Closure, Protective, Vehicle Storage for M42 Series Vehicles.

30. REQUIREMENTS

30.1 Frame and cover. The vehicle closure shall consist of a frame assembly (figure 8A) and a cover assembly (figure 79). The cover assembly shall be attached after the frame assembly has been installed on vehicle.

30.1.1 Frame assembly. The frame assembly components may be constructed from aluminum or steel as indicated by the optional material callouts on the detail figure drawings. Caution must be used in the fabrication of an assembly using both materials, to avoid contact of dissimilar metals. All screws in the frame assembly must be installed with the threaded end pointing down or toward the center of the assembly.

Instructions for assembly and installation of the frame are as follows:

(a) Assemble the front and rear frame assembly in accordance with figure 38C.
(b) Assemble the left and right frame assembly in accordance with figure 38B.
(c) Complete assembly in accordance with figure 38A.
(d) Install assembled frame to vehicle in accordance with figures 8A, and 9 through 13.
(e) All sharp corners of framework and bows where cloth cover will make contact, such as corners of the base of the frame, shall be cushioned with a minimum of two thicknesses of cushioning material conforming to class A of PPP-C-843, secured in place with tape conforming to type II of UU-T-106.

30.1.2 Cover assembly. Cover assembly shall be fabricated and installed in accordance with figures 79A through 119.

30.1.2.1 Marking. The information "TO LIFT VEHICLE FOR LOADING, UNFASTEN AND ROLL COVER FROM FRONT AND REAR BOWS EXPOSING LIFTING EYES - AFTER LOADING RECOVER AND SECURE" shall be stenciled in a conspicuous location on the front and rear of closure. Stenciling shall be in characters a minimum of 3/4 inch, using white enamel in conformance to TT-E-529. The information "CLOSURE KIT, VEHICLE PROTECTIVE - M42 - M42A1 - DO NOT DESTROY - REINSTALL FOR SHIPMENT OR STORAGE OR SHIP WITH OVE", shall be stenciled in a conspicuous location on one end and one side of closure. Stenciling shall be in characters a minimum of two inches, using white enamel in conformance to TT-E-529.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

30.2 Removal and disassembly. The vehicle closure shall be removed and disassembled in the reverse manner of installation (see 20.1.1).

30.3 Preservation, packaging and packing. The disassembled closure shall be preserved, packaged and packed in accordance with Packaging Data Sheet, "Kit, Closure, Protective, Vehicle Storage for M42 Series Vehicles", sheets 1 through 11.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

List of Contents

For

Kit, Closure, Protective, Vehicle Storage for M42 Series Vehicles

Fig. No.	Part Name	Quan.	Weight
17	Bracket Assembly, Front	2	
21	Bracket Assembly, Side	8	
25	Support Assembly, Left Intermediate	1	
29	Support Assembly, Rear	2	
34	Support Assembly, Right Intermediate	1	
39	Beam, Side	4	
40	Beam, Intermediate, Side	2	
41	Beam, Front & Rear	4	
42	Connector, Beam	6	
43	Tube, Side	4	
44	Bow, Top	9	
45	Tube, End	6	
46	Tube, Intermediate	3	
47	Connector, Tube	6	
48	Bow, Support	4	
49	Tube, Support	8	
50	Brace	8	
52	Plate Assembly, Corner	4	
53	Plate, Corner	4	
56	Tube Assembly, Side	4	
61	Tube Assembly, Side	4	
64	Tube Assembly, Side	4	
67	Tube Assembly, Side	2	
74	Clamp, for 3/8 Dia. Rod	32	
75	Rod, Hold Down, 3/8 Dia. x 83 lg.	4	
76	Rod, Hold Down, 3/8 Dia. x 69 lg.	2	
77	Rod, Hold Down, 3/8 Dia. x 60 lg.	4	
79	Cover, Vinyl Coated Nylon	1	
117	Ventilator Frame	4	

Standard Hardware

Part No.	Part Name	Quan.	Weight
127796	Screw, Set, Sq. Hd. 1/4-20UNC 2A x 3/4 lg.	2	
129544	Screw, Wood, Flat Hd. #8 x 1 1/2 lg.	64	
MS15795-210	Washer, Plain 1/4 Dia.	48	
MS35223-85	Screw, Pan Hd. 1/4-20UNC 2A x 1 1/2 lg.	52	
MS35223-87	Screw, Pan Hd. 1/4-20UNC 2A x 2 lg.	16	
MS35223-89	Screw, Pan Hd. 1/4-20UNC 2A x 2 1/2 lg.	135	
MS35291-6	Screw, Hex. Hd. Cap 1/4-20UNC 2A x 3/4 lg.	2	
MS35291-8	Screw, Hex. Hd. Cap 1/4-20UNC 2A x 1 lg.	2	
MS35291-10	Screw, Hex. Hd. Cap 1/4-20UNC 2A x 1 1/4 lg.	4	
MS35291-20	Screw, Hex. Hd. Cap 1/4-20UNC 2A x 3 1/2 lg.	2	
MS35291-26	Screw, Hex. Hd. Cap 1/4-20UNC 2A x 5 lg.	16	
MS35292-62	Screw, Hex. Hd. Cap 3/8-24UNF 2A x 1 1/4 lg.	8	
MS35337-25	Washer, Lock 1/4 Dia.	225	
MS35337-27	Washer, Lock 3/8 Dia.	4	
MS35425-14	Nut, Wing 1/4-20UNC 2B	221	
MS35690-402	Nut, Hex. 1/4-20UNC 2B	4	
MS35691-622	Nut, Hex. Jam 1/4-20UNF 2B	4	
MIL-C-565	Cord, Elastic Shock Absorber 3/8 Dia. x 24' lg.	1	

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

FEDERAL ITEM NAME	PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles		
COMPOSITION Metallic & Nonmetallic	**FINISH** Part Paint	**TECH/SVC STOCK NO.**

THIS KIT IS COMPRISED OF ALL THE PARTS REQUIRED FOR THE ASSEMBLY AND INSTALLATION OF THE "COVERED WAGON" CLOSURE FOR M42 SERIES VEHICLES.

FRAME COMPONENTS

FIG. NO.	PART NAME	QUAN.	PRESERVATIVE	PACKAGING	PACKING
39	Beam, Side	4	None	Sheet 4	Sheet 11
41	Beam, Front & Rear	4	None	Sheet 4	Sheet 11
43	Tube Assy., Side	4	MIL-C-16173, Gr. 1 (Unpainted Surfaces)	Sheet 5	Sheet 11
56	Tube Assy., Side	4	MIL-C-16173, Gr. 1 (Unpainted Surfaces)	Sheet 5	Sheet 11
61	Tube Assy., Side	4	MIL-C-16173, Gr. 1 (Unpainted Surfaces)	Sheet 5	Sheet 11
64	Tube Assy., Side	4	MIL-C-16173, Gr. 1 (Unpainted Surfaces)	Sheet 5	Sheet 11
67	Tube Assy., Side	2	MIL-C-16173, Gr. 1 (Unpainted Surfaces)	Sheet 5	Sheet 11
50	Brace	4	None	Sheet 5	Sheet 11
44	Bow, Top	9	None	Sheet 6	Sheet 11
48	Tube, Support	4	None	Sheet 7	Sheet 11
49	Bow, Support	8	MIL-C-16173, Gr. 1 (Unpainted Surfaces)	Sheet 7	Sheet 11
45	Tube, End	6	MIL-C-16173, Gr. 1 (Unpainted Surfaces)	Sheet 8	Sheet 11
46	Tube, Intermediate	3	MIL-C-16173, Gr. 1 (Unpainted Surfaces)	Sheet 8	Sheet 11
40	Beam, Inter. Side	2	None	Sheet 9	Sheet 9
79	Cover Assy.	1	None	Fold to 24" sq.	Sheet 11
75	Rod	4	None	Tape Together	Sheet 11
76	Rod	2	None	with PPP-T-60	Sheet 11
77	Rod	4	None	Tape 1" Width	Sheet 11

Cleaning of parts shall conform to Method C-1 of Specification MIL-P-116.
The figure numbers listed herein correspond to figure numbers in Specification MIL-G-45178, APPENDIX I.
Kit. Weight 592 lbs. ; Cube 30.0 cu-ft.

PREPARING ACTIVITY	DATE
OTAC	
REVISION	**DATE**
PACKAGING DATA SHEET NO.	

CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 1 OF 11 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

64

FEDERAL ITEM NAME	PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles		
COMPOSITION Metallic / **FINISH** Part Paint	**SNL OR CLASS**	**TECH/SVC STOCK NO.**

MIL G-45178/1(MO)

INSTALLATION COMPONENTS

The Items listed below shall be immobilized in the exterior container in locations specified on Sheet 9 of 11.

FIG. NO.	PART NAME	QUAN.	PRESERVATIVE	METHOD	PACKAGING
74	Clamp for 3/8" Dia. Rod	32	MIL-C-16173 Gr 2	I	Wrap with MIL-B-121, Type II, Gr. A, Cl. 2 and place in carton 5 x 4-1/4 x 3-1/2
52	Plate Assy., Corner	4	None	III	Place together in carton 8 x 8 x 4-1/2
53	Plate, Corner	4	None	III	
42	Connector, Beam	6	None	III	Place in carton 12 x 8 x 4
47	Connector, Tube	6	None	III	Place in carton 6 x 3-1/4 x 2-1/4
117	Frame, Vent	4	None	III	Place in carton 16-1/4 x 8 x 4
14	Block	1	MIL-C-16173 Gr 2	I	Wrap Fig. 14 with MIL-B-121, Type II, Gr. A,
15	Angle	2	None	I	Cl. 2 and place together with Fig. 15 and
25	Support Assy., LF Inter.	1	None	I	Fig. 25 in a carton 6-3/4 x 5-1/4 x 4
34	Support Assy., RT Inter.	1	None	III	Place in carton 19-1/4 x 4-1/2 x 4
17	Bracket Assy., Front	2	None	III	Place in carton 16 x 7 x 4
21	Bracket Assy., Side	8	None	III	Place in carton 8 x 6-1/4 x 5
29	Support Assy., Rear	2	None	III	Place in carton 8 x 6-1/4 x 5
30	Clamp	2	None	III	Place together in a carton 10-1/2 x 10-1/2 x 5

NOTE: Cartons shall conform to style RSC, Type CF, class weather-resistant of Specification PPP-B-636; closure shall be 2" width tape conforming to PPP-T-76; applied on top and bottom seam, extending 3" onto each end panel, when applicable.

The Items listed above shall be immobilized in the exterior container in the "assembly hardware" locations shown on sheet 11 of 11.

PREPARING ACTIVITY	DATE
OTAC	
REVISION	**DATE**
PACKAGING DATA SHEET NO.	

CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 2 OF 11 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

GENERAL ITEM NAME	PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles		
COMPOSITION: Metallic & Nonmetallic / FINISH: Part Plated	END ITEM OR CLASS	TECH/SVC STOCK NO.

STANDARD HARDWARE ITEMS

To be cleaned Method C-1 of MIL-P-116; metal parts only to be preserved with MIL-C-1673, Gr 2 and Packaged as indicated.

ORDNANCE PART NO.	QUAN.	PART NAME	SIZE	METHOD	CONTAINER	SIZE
MS35223-87	16	Screw, Pan Hd.	1/4-20UNC-2A x 2	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35291-6	2	Screw, Cap	1/4-20UNC-2A x 3/4	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35291-8	2	Screw, Cap	1/4-20UNC-2A x 1	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35291-10	4	Screw, Cap	1/4-20UNC-2A x 1-1/4	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35291-20	2	Screw, Cap	1/4-20UNC-2A x 3-1/2	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35292-62	8	Screw, Cap	3/8-24UNF-2A x 1-1/4	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
127796	2	Screw, Set	1/4-20UNC-2A x 3/4	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS15795-210	48	Washer, Plain	1/4 Dia.	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35337-25	225	Washer, Lock	1/4 Dia.	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35337-27	8	Washer, Lock	3/8 Dia.	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35690-402	6	Nut, Hex.	1/4-20UNC-2B	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35691-622	4	Nut, Jam	3/8-24UNF-2B	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
129544	64	Screw, Wood	#8 x 1-1/2 lg.	IC-1	MIL-B-117, Type II, Cl. C	4 x 5
MS35223-85	52	Screw, Pan Hd.	1/4-20UNC-2A x 1-1/2	I	PPP-B-676, Type I, Cl. A	3 x 2 x 3
MS35223-89	135	Screw, Pan Hd.	1/4-20UNC-2A x 2-1/2	I	PPP-B-676, Type I, Cl. A	5-1/2 x 4-1/2 x 4
MS35291-26	16	Screw, Cap	1/4-20UNC-2A x 5	I	PPP-B-676, Type I, Cl. A	5-1/4 x 2 x 1-1/4
MS35425-14	221	Nut, Wing	1/4-20UNC-2B	I	PPP-B-676, Type I, Cl. A	3 x 2 x 6
	1	Cord, Shock	3/8 Dia. x 24'	III	PPP-B-636 (RSC, Type CF, class weather-resistant	12 x 12 x 3

MIL-G-45178B(MO)

The items listed shall be immobilized in the exterior container in the "assembly hardware" locations shown on Sheet 11 of 11.

PREPARING ACTIVITY	DATE
OTAC	
REVISION	DATE
PACKAGING DATA SHEET NO.	


CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 3 OF 11 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

FEDERAL ITEM NAME	PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles		
COMPOSITION: Wood / FINISH: Paint	SHL OR CLASS	TECH/SVC STOCK NO.

MIL-G-45178A (MO)

BRACING DETAILS FOR BEAM FIG. 39 (4 EACH) AND BEAM FIG. 41 (4 EACH)

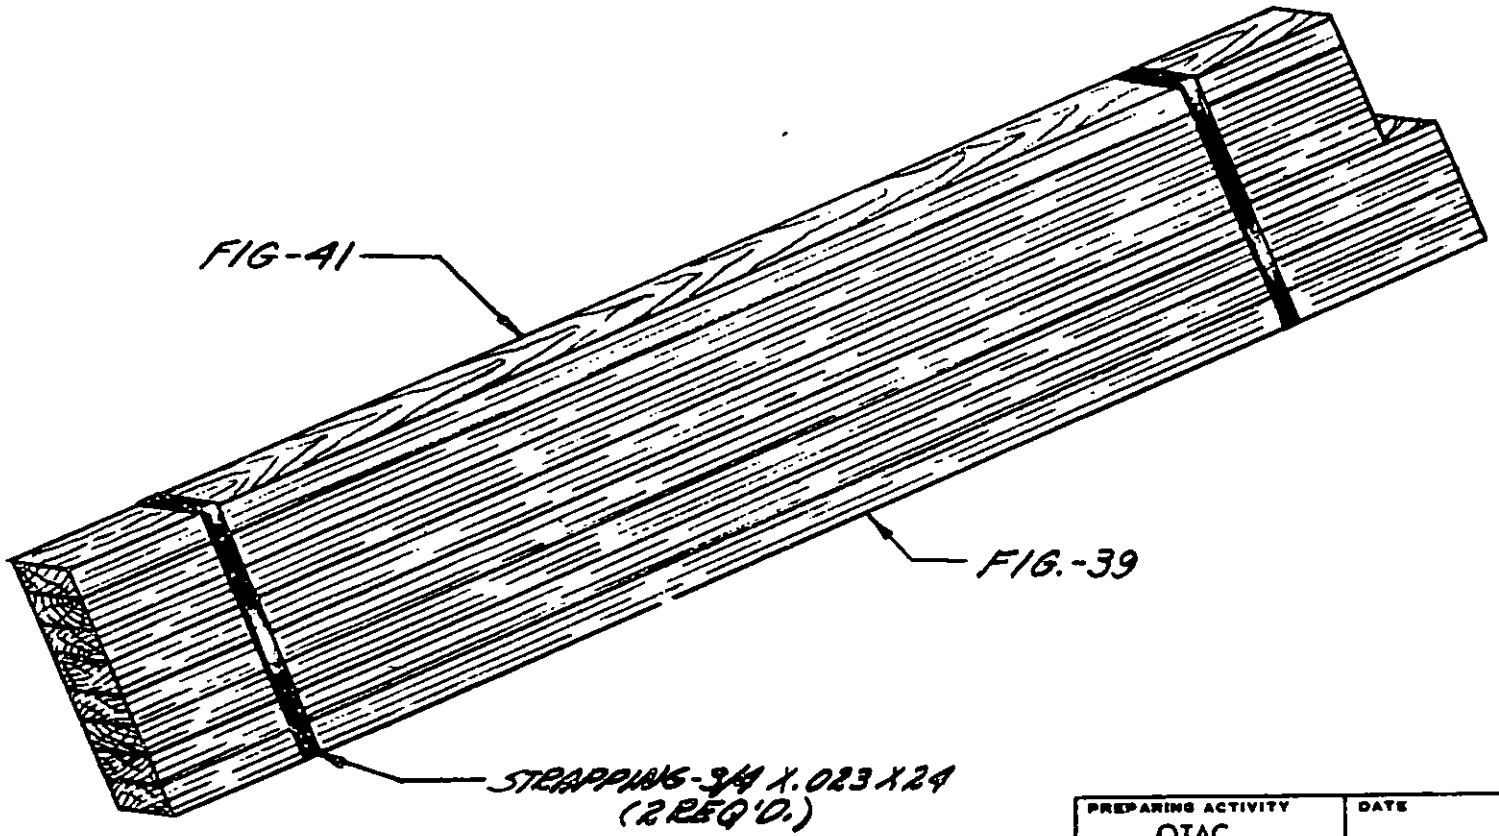


NOTE:
STRAPPING SHALL CONFORM TO SPEC. QQ-S-781

PREPARING ACTIVITY	DATE
OTAC	
REVISION	DATE
PACKAGING DATA SHEET NO.	


CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 4 OF 11 SHEETS

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

FEDERAL ITEM NAME	PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles		
COMPOSITION: Steel / FINISH: Paint	SIZE OR CLASS	TECHNIQUE STOCK NO.

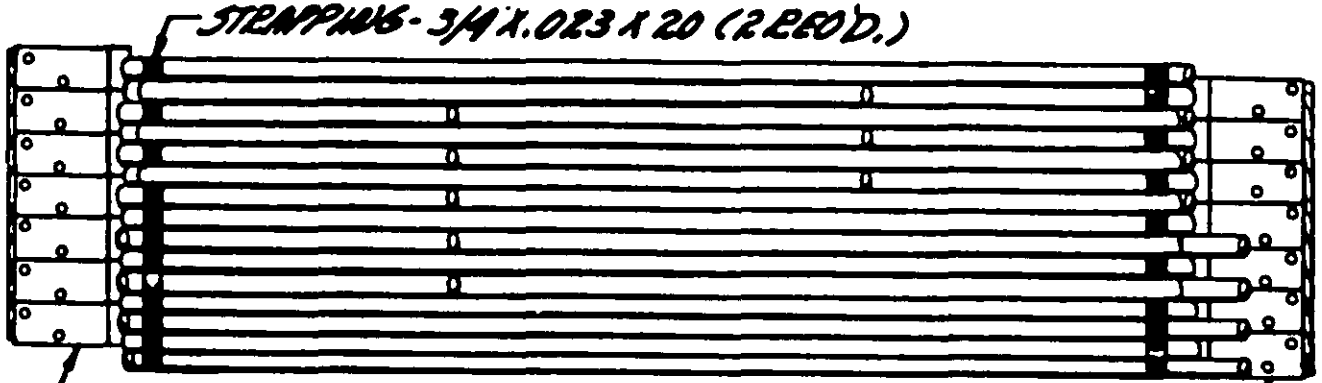

NOTES:
LUMBER SHALL CONFORM TO GROUP I OR II OF PPP-B-621
STRAPPING SHALL CONFORM TO QQ-S-781

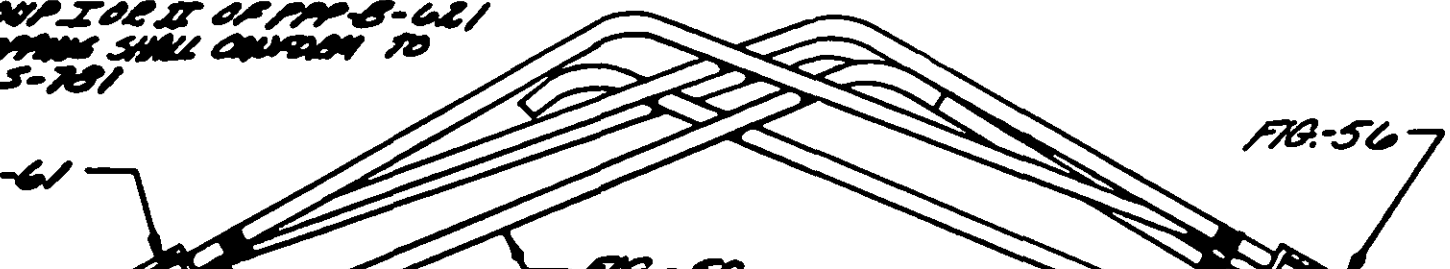

BARRIER DETAILS FOR:
TIRE, SIDE FIG. 13 (4 EACH)
TIRE ASSY. FIG. 64 (4 EACH)
TIRE ASSY. FIG. 56 (4 EACH)
TIRE ASSY. FIG. 67 (2 EACH)
TIRE ASSY. FIG. 61 (4 EACH)
LUMBER FIG. 50 (8 EACH)

PREPARING ACTIVITY: OTAC	DATE
REVISED	DATE
PACKAGING DATA SHEET NO.	

CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 5 OF 11 SHEETS

67

DD FORM 2138-1 REPLACES DD FORM 2138-1 OF 1 APR 1954, WHICH IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-22T02:31Z
Check the source to verify that this is the current version before use.

FEDERAL ITEM NAME		PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles			
COMPOSITION: Steel	FINISH: Paint	SHL OR CLASS	TECH/SVC STOCK NO.

MIL-G-45178A(MO)

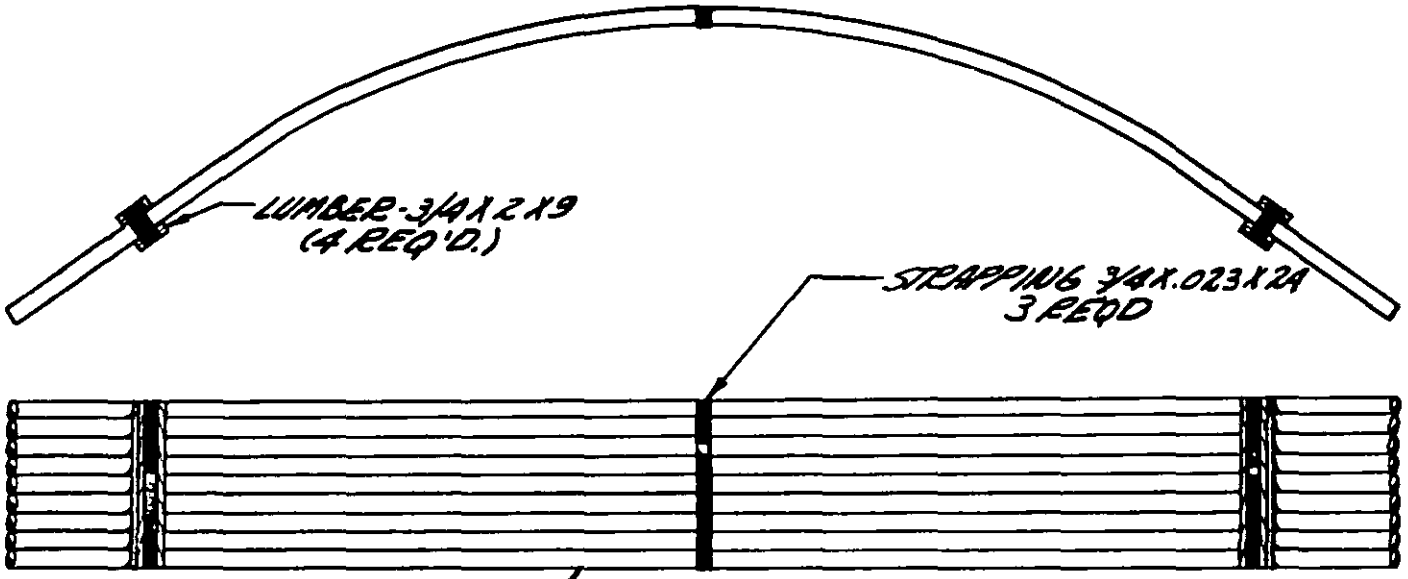


FIG.-44

BRACING DETAILS FOR BOW, TOP
FIG. 44. (3 REQ'D.)

NOTES:
LUMBER SHALL CONFORM TO GROUP I OR II OF MIL-STD-731

STRAPPING SHALL CONFORM TO QQ-S-781

PREPARING ACTIVITY	DATE
OTAC	
REVISION	DATE
PACKAGING DATA SHEET NO.	

CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 6 OF 11 SHEETS


DD FORM 1 AUG 87 2130-1

REPLACES DD FORM 1949-1 OF 1 APR 1966, WHICH IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

FEDERAL ITEM NAME	PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles		
COMPOSITION: Steel / FINISH: Paint	SNL OR CLASS	TECH/SVC STOCK NO.

BRACING DETAILS FOR BOW SUPPORT FIG. 48 (4 EACH) AND TUBE, SUPPORT - FIG. 49 (8 EACH)

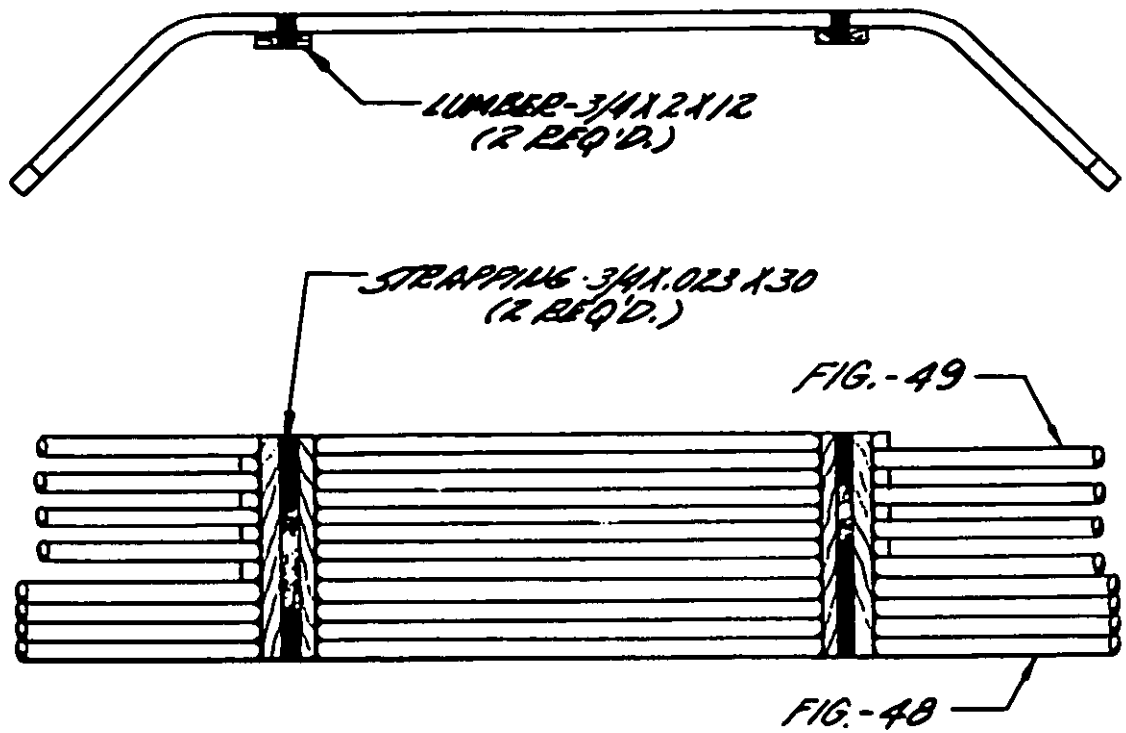

NOTES:
LUMBER SHALL CONFORM TO GROUP I OR II OF MIL STD-731

STRAPPING SHALL CONFORM TO QQ-S-781

MIL-G-45178A(MO)

PREPARING ACTIVITY: OTAC	DATE
REVISION	DATE
PACKAGING DATA SHEET NO.	

CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 7 OF 11 SHEETS

00 FORM 1 AUG 87 2130-1 REPLACES DD FORM 1660-1 OF 1 APR 1986, WHICH IS OBSOLETE.


Source: https://assist.dla.mil -- Downloaded: 20260-22T02:31Z
Check the source to verify that this is the current version before use.

FEDERAL ITEM NAME	PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles		

COMPOSITION	FINISH	SNL OR CLASS	TECH/SVC STOCK NO.
Steel	Paint		

MIL-G-45173A(MD)

BANDING DETAILS FOR TUBE, END FIG. 45 (6 EACH) AND TUBE, INTERMEDIATE FIG. 46 (3 EACH)

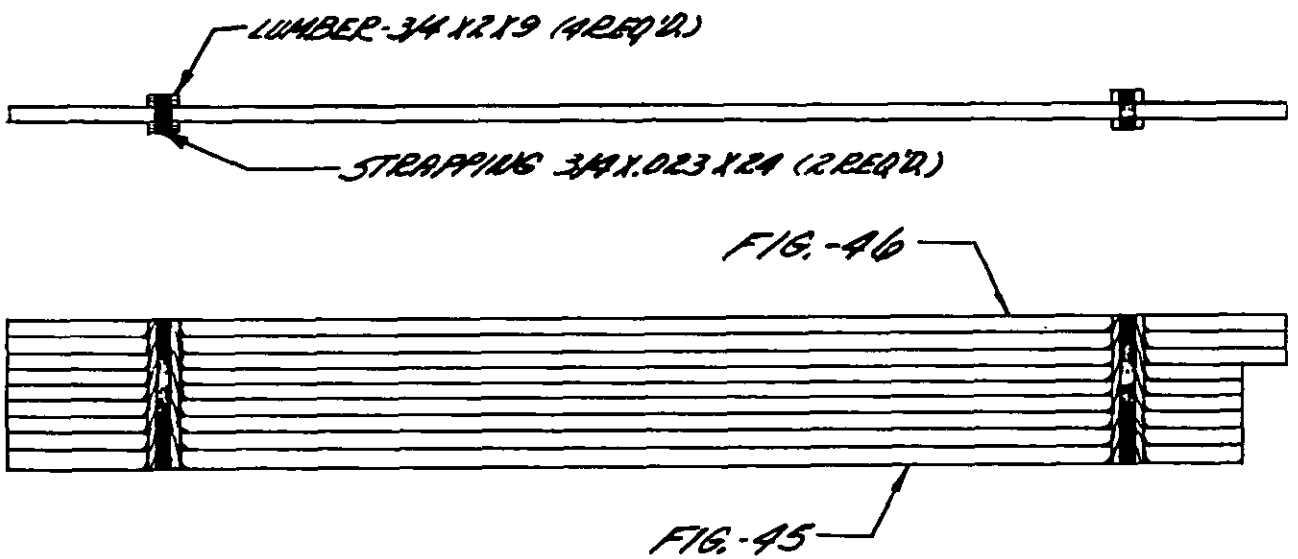

NOTE: LUMBER SHALL CONFORM TO GROUP I OR II OF MIL-STD-731
STRAPPING SHALL CONFORM TO QQ-S-781

PREPARING ACTIVITY	DATE
OTAC	
REVISION	DATE
PACKAGING DATA SHEET NO.	

CONTINUATION SHEET FOR PACKAGING DATA SHEET

SHEET 8 OF 11 SHEETS

00 FORM 1 AUG 87 2130-1

REPLACES DD FORM 1946-1 OF 1 APR 1986, WHICH IS OBSOLETE.


Source: https://assist.dla.mil -- Downloaded: 20260410-22T02:31Z
Check the source to verify that this is the current version before use.

1. FEDERAL ITEM NAME	DRAW NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles		
COMPOSITION	USE ON (CLASS)	RECEIVING STOCK NO.

NOTE: COVER (NOT SHOWN) TO BE 3/8" PLYWOOD
#9 - 1 1/2 LG. SCREWS - 32 REQ'D.

NAILING NOTE:
ITEMS 3 & 8 NAIL AND CLINCH TO COVER - 8d NAILS 24 REQ'D.
ITEMS 5 & 7 NAIL AND CLINCH TO BOX 6d NAILS 72 REQ'D.
ITEMS 4 & 6 NAIL AND CLINCH TOGETHER (INSTALL AFTER BOX IS PACKED) - 16d NAILS 12 REQ'D.
ITEM 2 NAIL AND CLINCH TO BOTTOM OF BOX. 8d NAILS - 95 REQ'D.

CONTAINER SHIPPING FOR:
KIT, CLOSURE PROTECTIVE VEHICLE STORAGE FOR M42 SERIES VEHICLES

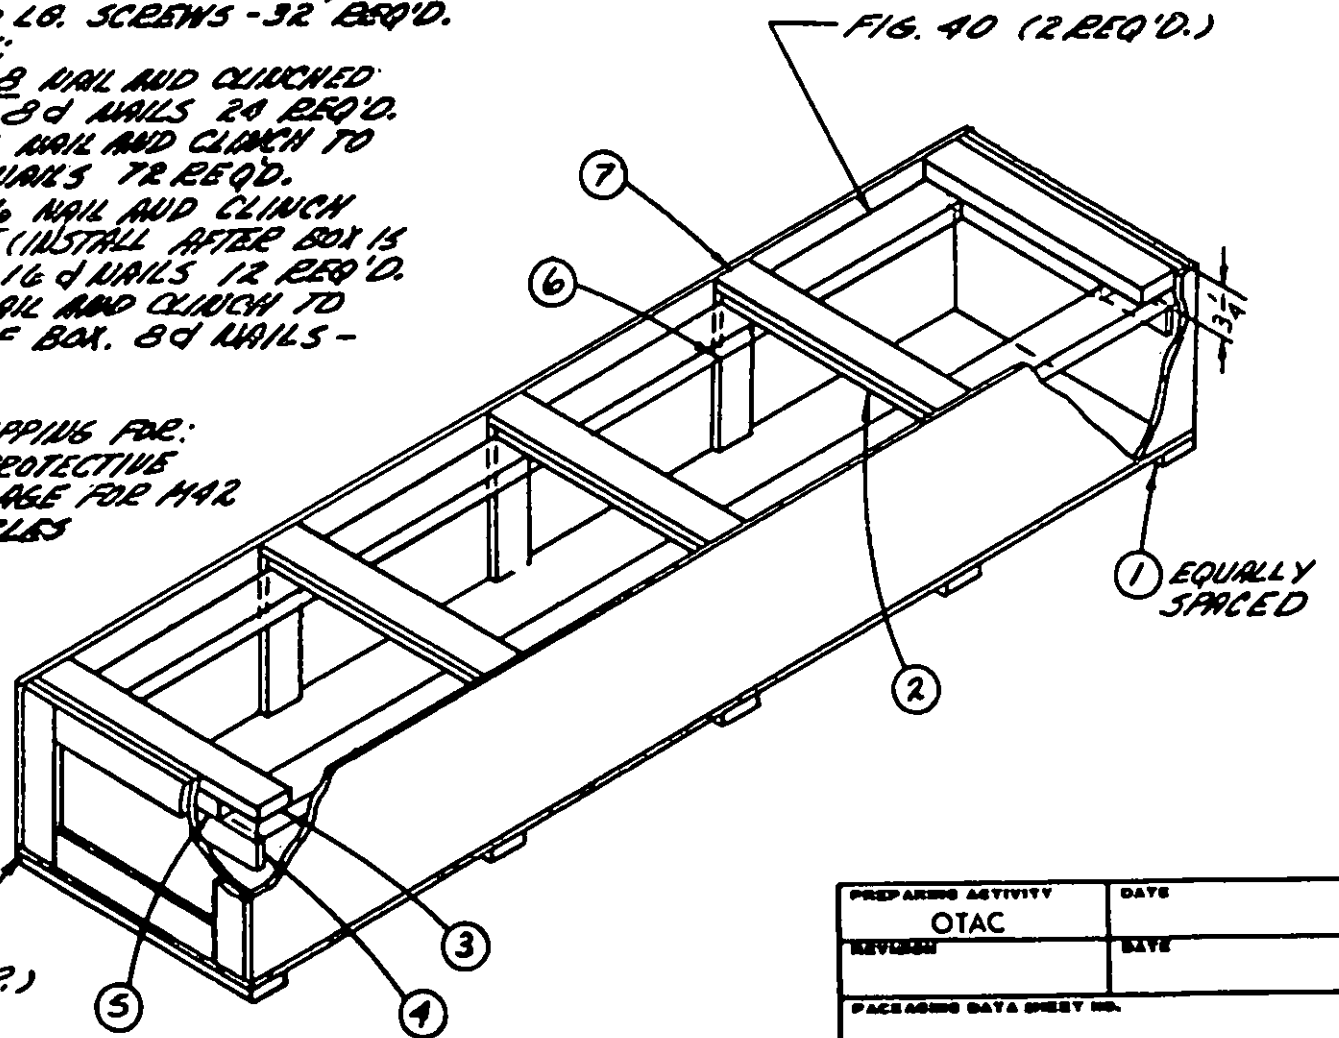

MIL-G-45178A(AR)

PREPARING ACTIVITY	DATE
OTAC	
REVISED	DATE
PACKAGING DATA SHEET NO.	

CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 9 OF 11 SHEETS

71

00 FORM 1, AUG 67 2138-1 REPLACES DD FORM 1659, OCT 1 APR 1955, WHICH IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 20260-22T02:31Z
Check the source to verify that this is the current version before use.

FEDERAL ITEM NAME		PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage For M42 Series Vehicles			
COMPOSITION: Steel & Wood	FINISH	MIL OR CLASS	TECHNIQUE STOCK NO.

MIL-G-45178A(MO)

ITEM	REQ'D.	SIZE	SPEC.
BOX	1	101 3/4 X 24 1/2 X 15 7/8	PPP-B-621
1	5	1 5/8 X 3 5/8 X 26.	PPP-B-621
2	3	3/4 X 3 1/2 X 23.	PPP-B-621
3	2	1 5/8 X 3 5/8 X 24 1/2	PPP-B-621
4	2	3/4 X 3 1/2 X 24 1/2	PPP-B-621
5	2	1 5/8 X 3 5/8 X 16.	PPP-B-621
6	6	3/4 X 3 1/2 X 15 7/8	PPP-B-621
7	3	3/4 X 3 1/2 X 23.	PPP-B-621

MATERIAL NOTE:
LUMBER SHALL CONFORM TO GROUP I OR II OF MIL-STD-731

MATERIAL NOTE (PLY)
LUMBER SHALL CONFORM TO TYPE I CLASS I OF SPEC. NN-P-515

CUSHIONING NOTE:
USE CUSHIONING MATERIAL CONFORMING TO TYPE III CLASS C OF PPP-C-843 AS REQUIRED.

NAILING NOTE:
NAILS TO BE CEMENT COATED (COOLERS) AND CONFORM TO SPEC. FF-N-105


PREPARING ACTIVITY	DATE
OTAC	
REVISION	DATE
PACKAGING DATA SHEET NO.	

CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 10 OF 11 SHEETS

00 FORM 1, AUG 87 2138-1 REPLACES DD FORM 2138-1 OF 1 APR 1982, WHICH IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

FEDERAL ITEM NAME	PART NO.	FEDERAL STOCK NO.
Kit, Closure, Protective, Vehicle Storage for M42 Series Vehicles		
COMPOSITION Metallic & Nonmetallic	**FINISH** Part Paint	SPEC OR CLASS	TECH/SVC STOCK NO.

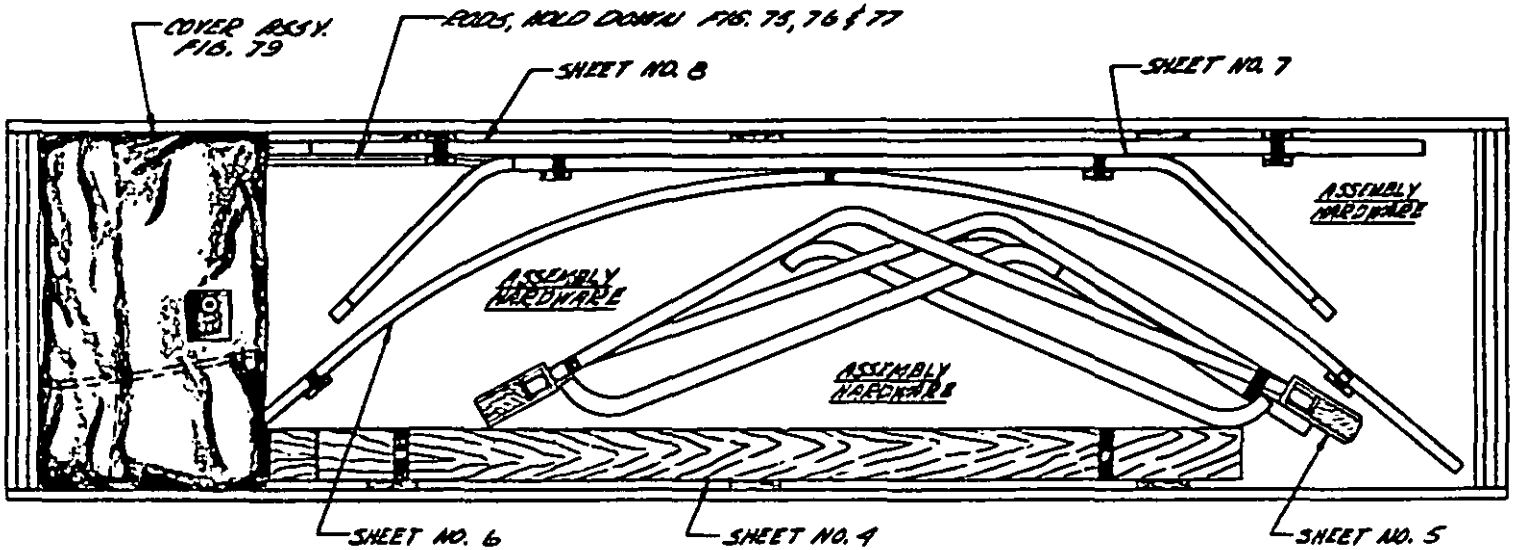

PLAN VIEW FOR PLACING KIT COMPONENTS IN SHIPPING CONTAINER

NOTE:
FIG. 40 BEAM, OUTER SIDE, SHOWN ON SHEET 9 OF 11.

MIL-G-45178A(MU)

PREPARING ACTIVITY	DATE
OTAC	
REVISION	DATE
PACKAGING DATA SHEET NO.	

CONTINUATION SHEET FOR PACKAGING DATA SHEET — SHEET 11 OF 11 SHEETS

73

00 FORM 1 AUG 07 2138-1 REPLACES DD FORM 1949-1 OF 1 APR 1988, WHICH IS OBSOLETE. CAD

Source: https://assist.dla.mil -- Downloaded: 20260-22T02:31Z
Check the source to verify that this is the current version before use.

FIGURES 1 THROUGH 5 NOT USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST- WATERSHED FRAME & COVER ASSEMBLY

FIG	PART NAME	REQ	SIZE	MATERIAL	SPEC.
14	BLOCK	1	3/4 x 1. x 4. LG.	STEEL	QQ-S-633
15	ANGLE	2	L 1 1/4 x 2 x 1/4 x 3. LG	STEEL	MIL-S-13281
17	BRACKET ASSY.	2	ASSEMBLY		
18	BRACKET	2	1/4 x 2. x 2 1/4 LG	STEEL	QQ-S-633
19	GUSSET	2	1/4 x 2. x 12 LG.	STEEL	QQ-S-633
21	BRACKET ASSY.	8	ASSEMBLY		
22	BRACKET	8	1/4 x 1. x 7 1/2 LG	STEEL	QQ-S-633
23	SUPPORT	8	1/4 x 2. x 6 3/4 LG.	STEEL	QQ-S-633
25	SUPPORT ASSY.	1	ASSEMBLY		
26	SUPPORT	1	1/4 x 4. x 14 LG	STEEL	QQ-S-633
27	STIFFENER	1	1/4 x 2 1/2 x 5 3/4 LG	STEEL	QQ-S-633
29	SUPPORT ASSY.	2	ASSEMBLY		
30	CLAMP	4	1/4 x 1 1/2 x 12. LG.	STEEL	QQ-S-633
31	PLATE	2	1/4 x 3. x 3 1/2 LG.	STEEL	QQ-S-633
32	ANGLE	2	L 1 1/4 x 1 1/4 x 1/4 x 10.	STEEL	MIL-S-13281
34	SUPPORT ASSY.	1	ASSEMBLY		
35	SUPPORT	1	1/4 x 4. x 24 1/2 LG	STEEL	QQ-S-633
36	STIFFENER	1	1/4 x 2 1/2 x 18 3/4	STEEL	QQ-S-633
38	FRAME ASSY.	1	ASSEMBLY		
39	BEAM, SIDE	4	2. x 4. x 68. LG	WOOD	MM-L-751
40	BEAM, SIDE	2	2. x 4. x 101 3/4 LG	WOOD	MM-L-751
41	BEAM	4	2 x 4. x 64 5/8 LG.	WOOD	MM-L-751
42	CONNECTOR	6	2. x 4. x 3/16 x 8 LG.	STEEL	QQ-T-00825
43	TUBE, SIDE	4	1.00. x .065 x 60 LG	STEEL.	QQ-T-00825
44	BOW, TOP	9	1 1/8 OD. x .049 x 100	STEEL	QQ-T-00825
45	TUBE, END	6	1.00. x .065 x 78	STEEL	QQ-T-00825
46	TUBE, INTERMED.	3	1.00 x .065 x 81 1/8	STEEL	QQ-T-00825
47	CONNECTOR	6	1 1/8 OD. x .049 x 8.	STEEL	QQ-T-00825
48	BOW, SUPPORT	4	1 1/8 OD x .049 x 78	STEEL	QQ-T-00825

FIGURE 6A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST- WATERSHED FRAME & COVER ASSEMBLY

FIG	PART NAME	REQ	SIZE	MATERIAL	SPEC.
49	TUBE, SUPPORT	8	1.00 x .065 x 56 LG	STEEL	QQ-T-00825
50	BRACE	8	1.00 x .065 x 39 LG	STEEL	QQ-T-00825
52	PLATE ASSY.	4	ASSEMBLY		
53	PLATE	8	1/4 x 8. x 8 LG	STEEL	QQ-S-693
54	TUBE	4	1/4 OD x .109 x 3 1/2	STEEL	QQ-T-00825
56	TUBE ASSY	4	ASSEMBLY		
57	TUBE, SIDE	4	1.00 x .065 x 60 LG	STEEL	QQ-T-00825
58	BRACKET	14	1/8 x 2. x 12 1/2 LG	STEEL	MIL-S-46049
59	PLATE, BOTTOM	14	1/8 x 2. x 1 41/64 LG.	STEEL	MIL-S-46049
61	TUBE ASSY.	4	ASSEMBLY		
62	TUBE, SIDE	4	1.00 x .065 x 60 LG	STEEL	QQ-T-00825
64	TUBE ASSY	4	ASSEMBLY		
65	TUBE, SIDE	4	1.00 x .065 x 60 LG.	STEEL	QQ-T-00825
67	TUBE ASSY.	2	ASSEMBLY		
68	TUBE, SIDE	2	1.00. x .065 x 60 LG	STEEL	QQ-T-00825
74	CLAMP	32	FOR 3/8 DIA. ROD		
75	ROD	4	3/8 DIA. x 83 LG	ALUMINUM	QQ-A-225
76	ROD	2	3/8 DIA. x 69 LG	ALUMINUM	QQ-A-225
77	ROD	4	3/8 DIA x 60 LG	ALUMINUM	QQ-A-225
79	COVER ASSY.	1	ASSEMBLY		
89	SECTION, COVER	2.	34. x 121 1/2 LG.	FABRIC	MIL-C-20696
90	SECTION, COVER	4	36. x 121 1/2 LG.	FABRIC	MIL-C-20696
91	SECTION, COVER	1	35. x 121 1/2 LG	FABRIC	MIL-C-20696
92	SECTION, COVER	2	36. x 72. LG	FABRIC	MIL-C-20696
93	SECTION, COVER	2	35. x 72 LG	FABRIC	MIL-C-20696
94	SECTION, COVER	3	33 1/4 x 60 3/4 LG	FABRIC	MIL-C-20696
95	SECTION, COVER	1	33 1/4 x 60 3/4 LG	FABRIC	MIL-C-20696
98	REINFORCEMENT	32	3 3/4 x 4 1/4 LG	FABRIC	MIL-C-20696

FIGURE 68

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - WATERSHED FRAME & COVER ASSEMBLY

FIG.	PART NAME	REQ	SIZE	MATERIAL	SPEC.
99	WEBBING	16	2 x 2 3/4 LG.	WEBBING	MIL-W-530
100	STRIP	4	1 1/2 x 15 1/4 LG	FABRIC	MIL-C-20696
101	STRIP	4	1 1/2 x 26 3/4 LG.	FABRIC	MIL-C-20696
102	STRIP	4	1 1/2 x 33 1/4 LG.	FABRIC	MIL-C-20696
103	STRIP	4	1 1/2 x 20 3/4 LG.	FABRIC	MIL-C-20696
104	STRIP	2	1 1/2 x 22 1/2 LG.	FABRIC	MIL-C-20696
105	STRIP	3	1 1/2 x 30 1/2 LG.	FABRIC	MIL-C-20696
106	STRIP	4	1 1/2 x 22 3/4 LG.	FABRIC	MIL-C-20696
107	STRIP	1	1 1/2 x 17. LG.	FABRIC	MIL-C-20696
108	STRIP	1	1 1/2 x 20 1/2 LG.	FABRIC	MIL-C-20696
109	ZIPPER FLAP	2	4 1/2 x 70. LG.	FABRIC	MIL-C-20696
110	ZIPPER FLAP	1	4 1/2 x 24 5/16 LG.	FABRIC	MIL-C-20696
111	SLEEVE	1	10. x 22 LG.	FABRIC	MIL-C-20696
113	COVER, VENT.	4	ASSEMBLY		
114	SECTION, COVER	4	8 5/8 x 14 1/8 LG.	FABRIC	MIL-C-20696
115	SECTION, COVER	4	5 5/8 x 7. LG.	FABRIC	MIL-C-20696
117	FRAME, VENT	4	ASSEMBLY		
118	FRAME	4	3/16 DIA x 42 LG.	STEEL	QQ-S-633
119	ROD	16	3/16 DIA x 7 5/8 LG	STEEL	QQ-S-633

FIGURE 6C

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - STANDARD HARDWARE

PART NAME	TOTAL REQ.	SIZE	ORD. PART NO.
SCREW, PAN HD.	52	1/4-20UNC-2A x 1 1/2	MS35223-85
SCREW, PAN HD.	16	1/4-20UNC-2A x 2.	MS35223-87
SCREW, PAN HD.	135	1/4-20UNC-2A x 2 1/2	MS35223-89
SCREW, CAP	2	1/4-20UNC-2A x 3/4	MS35291-6
SCREW, CAP	2	1/4-20UNC-2A x 1.	MS35291-8
SCREW, CAP	4	1/4-20UNC-2A x 1 1/4	MS35291-10
SCREW, CAP	2	1/4-20UNC-2A x 3 1/2	MS35291-20
SCREW, CAP	16	1/4-20UNC-2A x 5	MS35291-26
SCREW, CAP	8	3/8-24UNF-2A x 1 1/4	MS35292-62
SCREW, SET	2	1/4-20UNC-2A x 3/4	127796
WASHER, PLAIN	32, 48*	1/4 DIA.	MS15795-210
WASHER, LOCK	225	1/4 DIA.	MS35337-25
WASHER, LOCK	8	3/8 DIA.	MS35337-27
NUT, WING	221	1/4-20UNC-2B	MS35425-14
NUT, HEX.	6	1/4-20UNC-2B	MS35690-402
NUT, JAM	4	3/8-24UNF-2B	MS35691-622
SCREW, WOOD	64	#8 x 1 1/2 LG.	129544
FASTENER	8	11/64 LG	425937
FASTENER	8		425936
FASTENER	8		190285
FASTENER	8	1/4 LG.	425935
GROMMET	16	#2 BRASS SPUR	
CORD, SHOCK	1	3/8 DIA. x 24 FT	
ZIPPER	2	SIZE H, 64 LG	V-F-106 CLASS B
ZIPPER	1	SIZE H, 20 LG	V-F-106 CLASS B
STRAP	1	5/8 WIDE x 20. LG	501285

* MAXIMUM AMOUNT REQUIRED FOR SHIMMING

FIGURE 60

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST INSTALLATION WATERSHED FRAME

ITEM NO.	FIG. NO	PART NAME	REQ'D.
1	38	FRAME ASSEMBLY	1
2	17	BRACKET ASSEMBLY, FRONT	2
3	30	CLAMP	2
4	14	BLOCK	1
5	15	ANGLE	2
6	21	BRACKET ASSEMBLY, SIDE	8
7	25	SUPPORT ASSEMBLY, LEFT INTERMEDIATE	1
8	29	SUPPORT ASSEMBLY, REAR	2
9	34	SUPPORT ASSEMBLY, RIGHT INTERMEDIATE	1

STANDARD HARDWARE

ITEM NO	REQ'D.	PART NAME	SIZE	ORDNANCE PART NO.
10	4	NUT, HEX.	1/4-20UNC-2B	MS35690-402
11	4	NUT, HEX. JAM	3/8-24UNF-2B	MS35691-622
12	28	SCREW, PAN HD.	1/4-20UNC-2A x 2 1/2 LG	MS35223-89
13	4	SCREW, HEX. HD. CAP	1/4-20UNC-2A x 1 1/4 LG	MS35291-10
14	2	SCREW, HEX. HD. CAP	1/4-20UNC-2A x 1. LG	MS35291-8
15	2	SCREW, HEX. HD. CAP	1/4-20UNC-2A x 3/4 LG	MS35291-6
16	8	SCREW, HEX. HD CAP	3/8-24UNF-2A x 1 1/4 LG	MS35292-62
17	2	SCREW, SET SQ. HD.	1/4-20UNC-2A x 3/4 LG	127796
18	28	NUT, WING	1/4-20UNC-2B	MS35425-14
19	32 48*	WASHER, PLAIN	1/4 DIA.	MS15795-210
20	32	WASHER, LOCK	1/4 DIA	MS35337-25
21	4	WASHER, LOCK	3/8 DIA.	MS35337-27

* MAXIMUM AMOUNT REQUIRED FOR SHIMMING OF BRACKET, FIGURE 21

FIGURE 7A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL-CARBON FS1010 THRU FS1025
SPEC. QQ-S-633

II STEEL
CLASS A
SPEC. MIL-S-13281

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

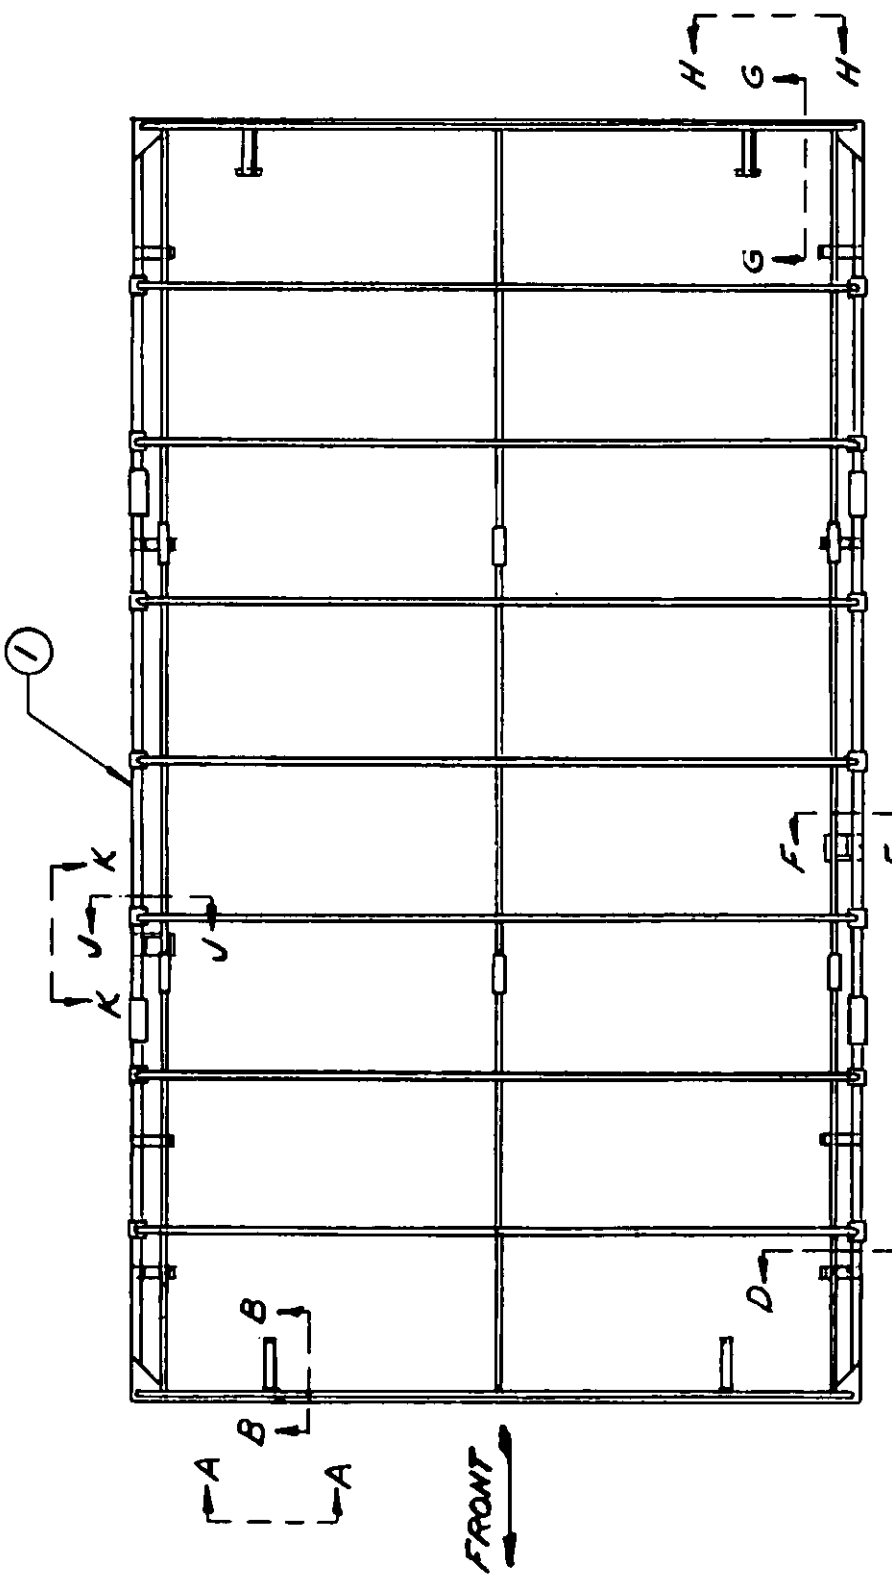


FIGURE 8 A
INSTALLATION WATERSHED
FRAME

FOR SECTIONS AND VIEWS
SEE FIGURES 9, 10, 11, 12 & 13

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

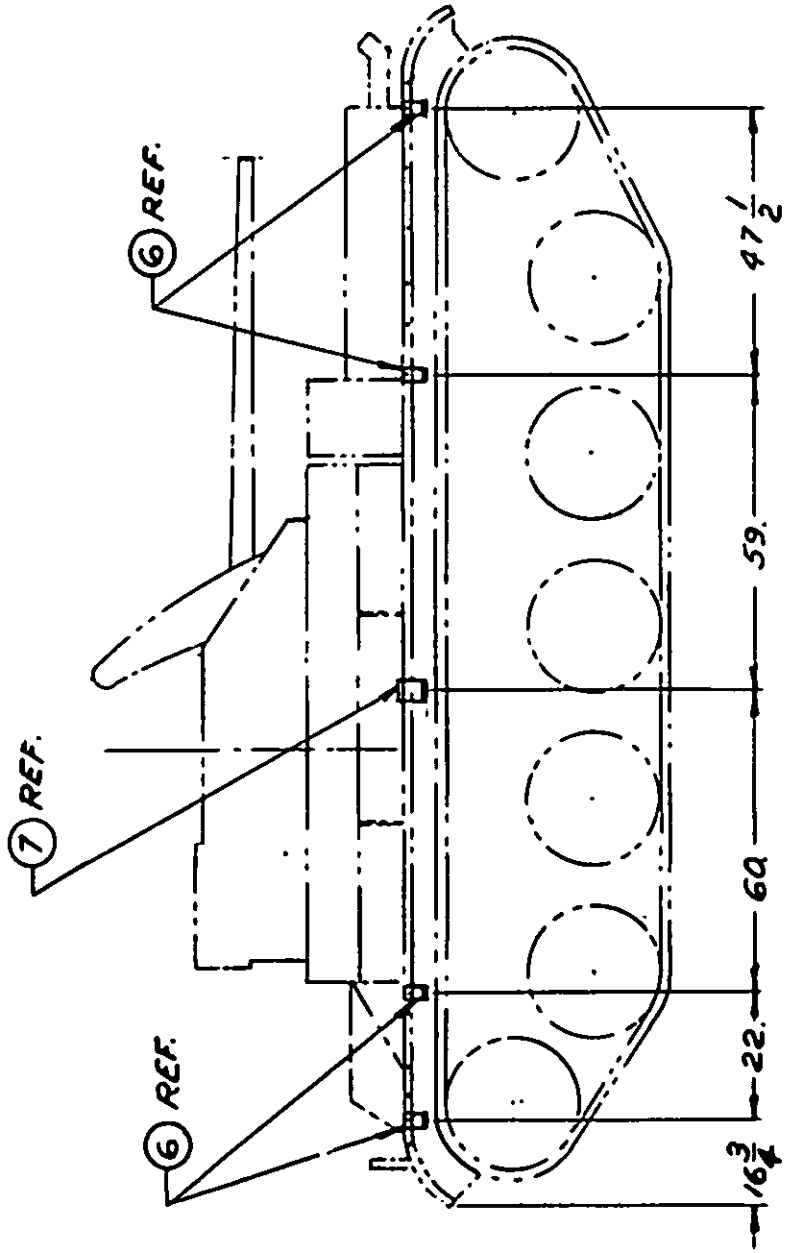


FIGURE 88
INSTALLATION WATERSHED
FRAME - LEFT ELEVATION

DIMENSIONS ARE APPROX.

FRAME ASSY. REMOVED TO
SHOW BRACKET LOCATIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

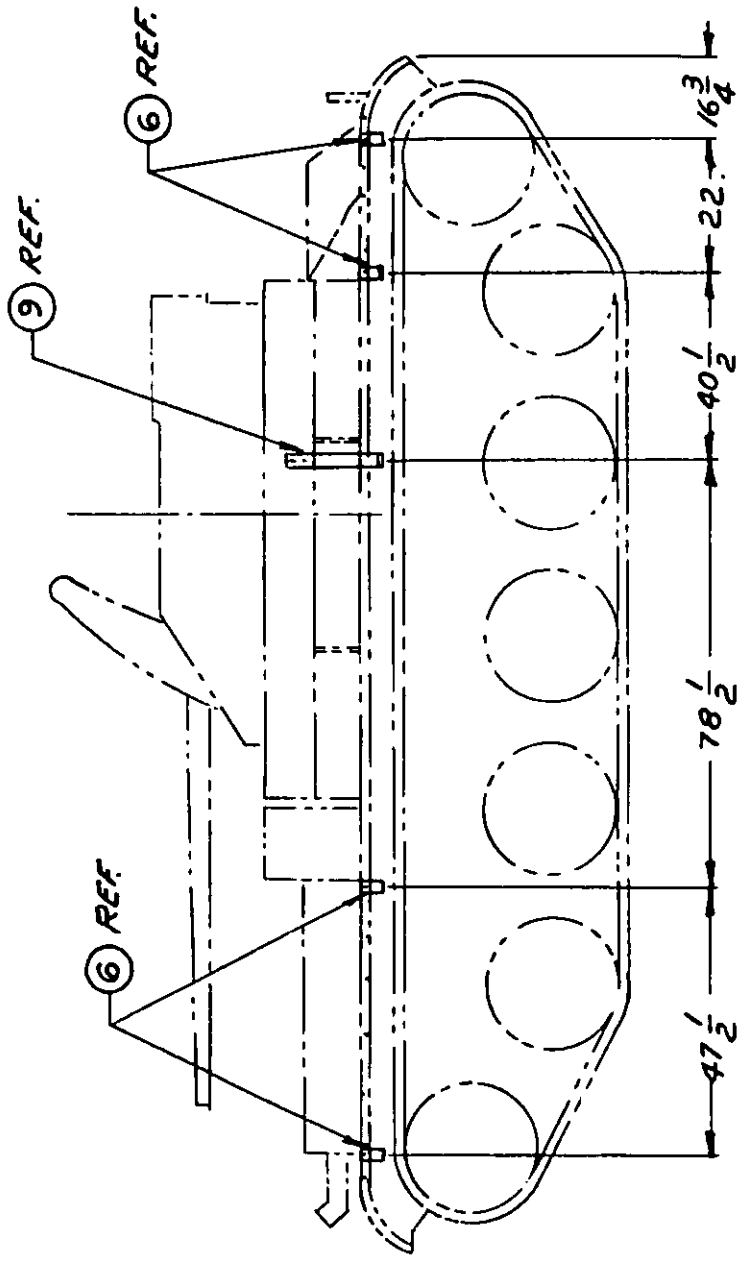


FIGURE 8C
INSTALLATION WATERSHED
FRAME - RIGHT ELEVATION

DIMENSIONS ARE APPROX.

FRAME ASSY. REMOVED TO
SHOW BRACKET LOCATIONS

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

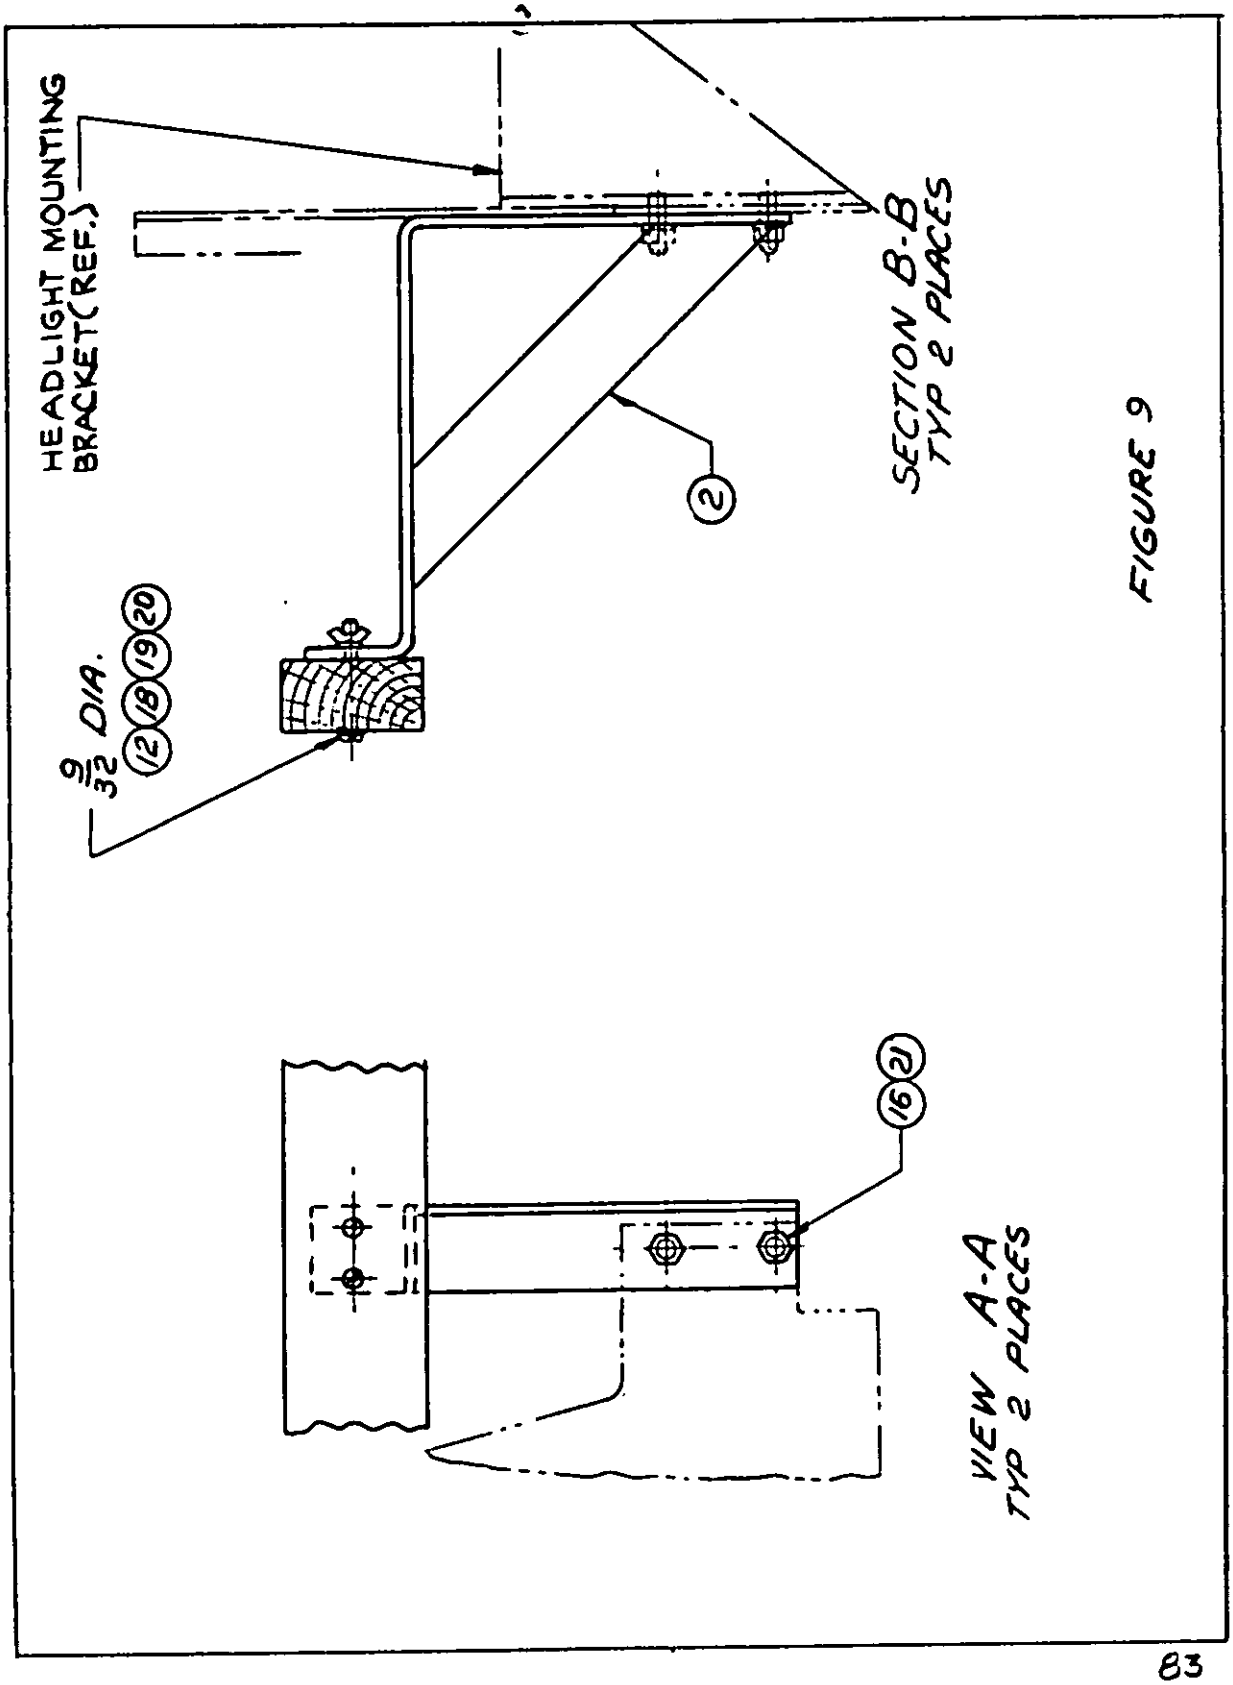


FIGURE 9

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.



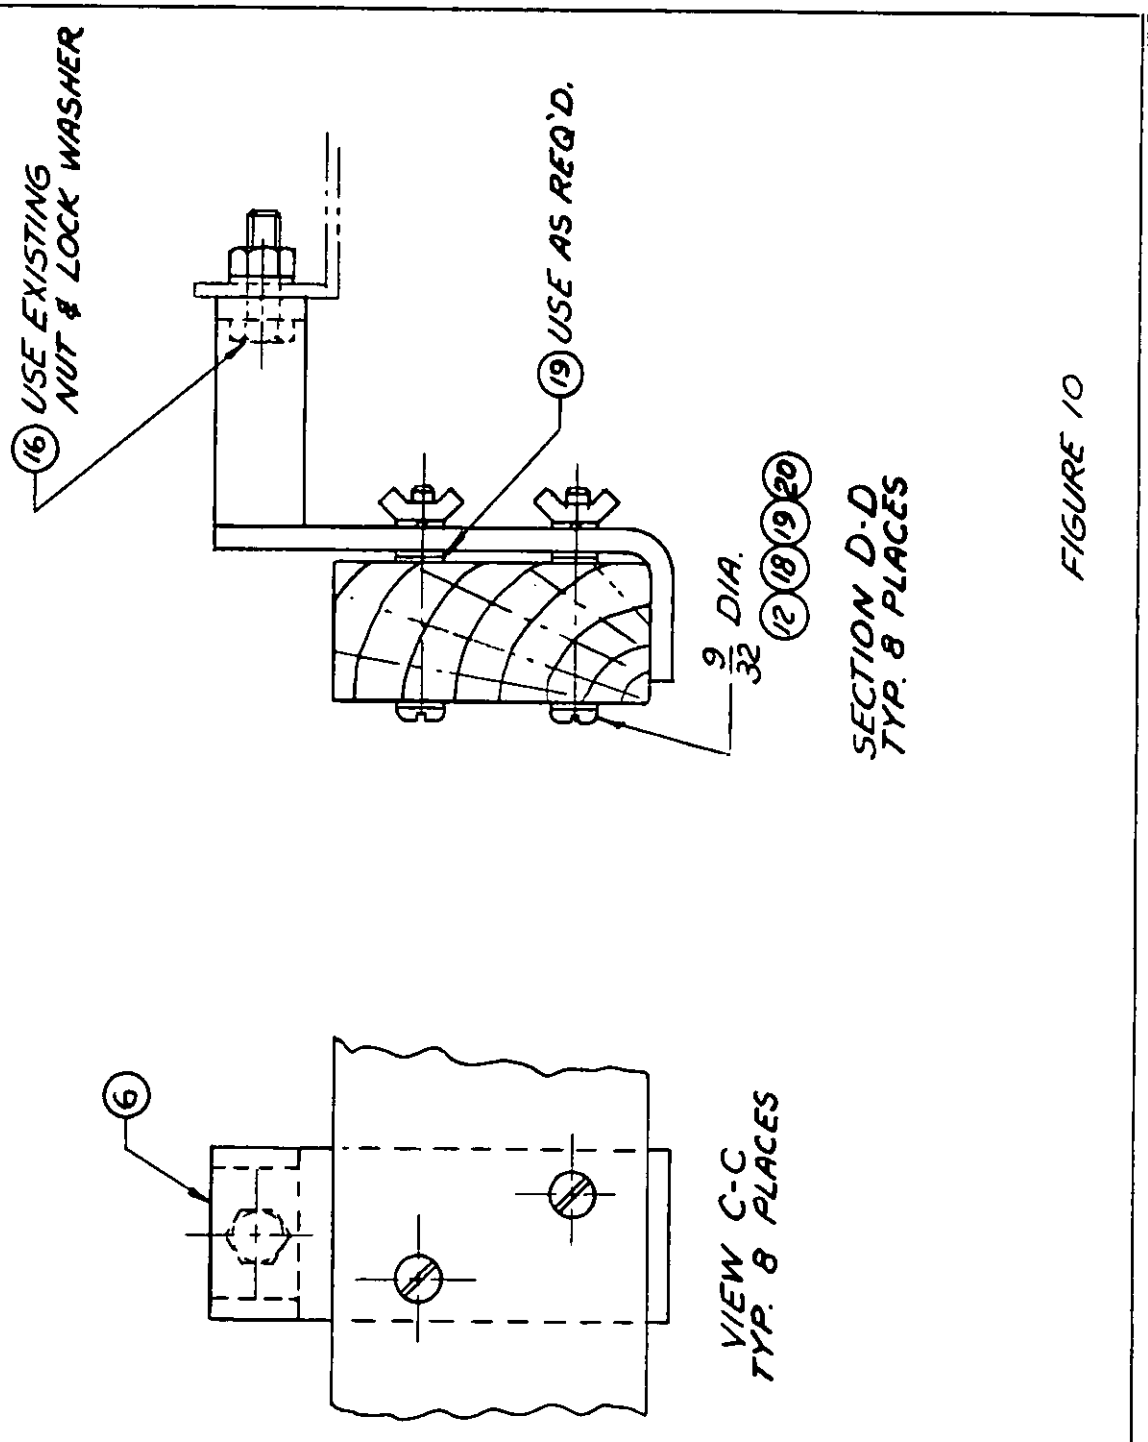


FIGURE 10

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

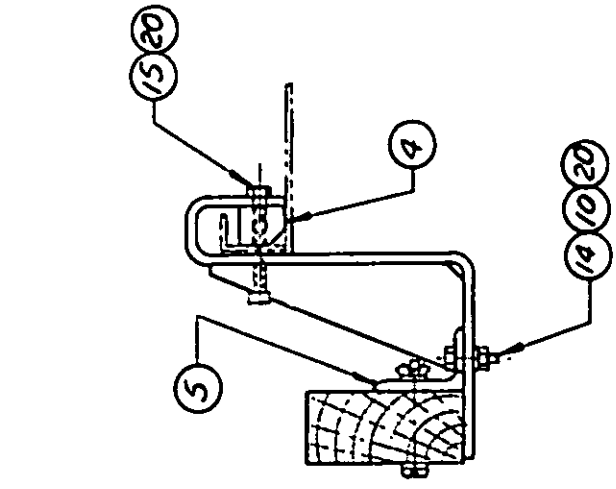


SECTION F-F

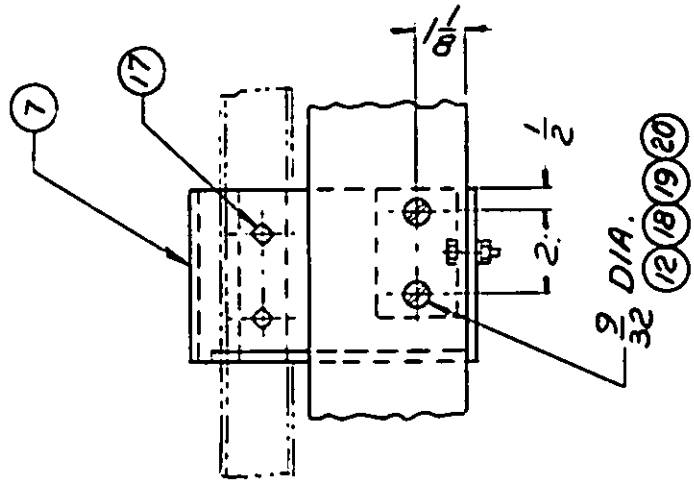


VIEW E-E

FIGURE 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

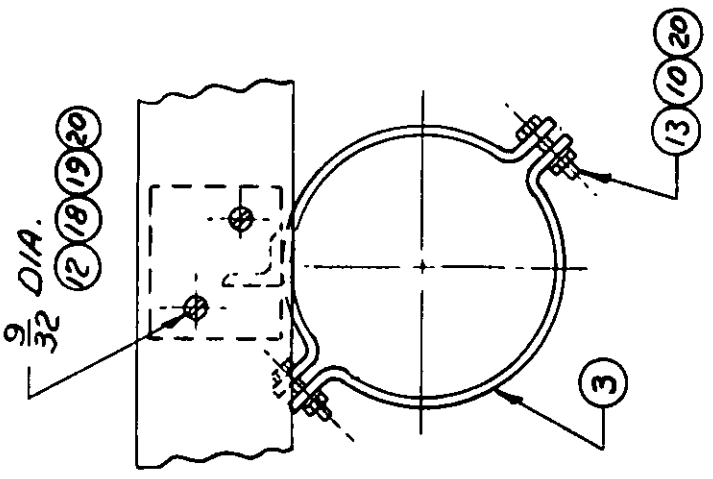

VIEW H-H
TYP. 2 PLACES

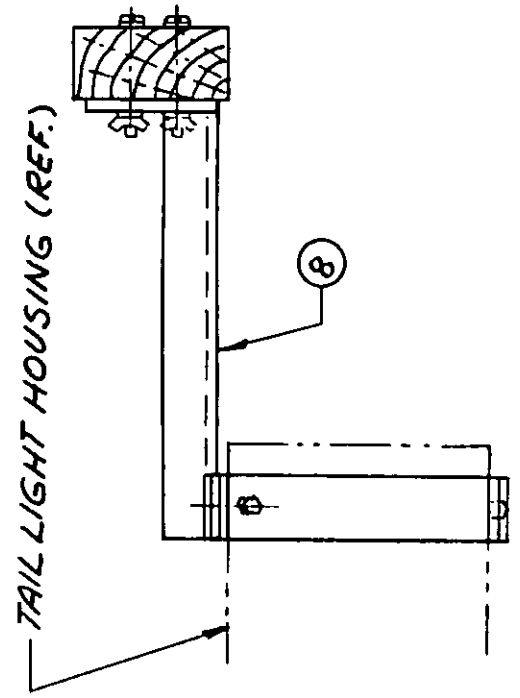

SECTION G-G
TYP 2 PLACES

FIGURE 12

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


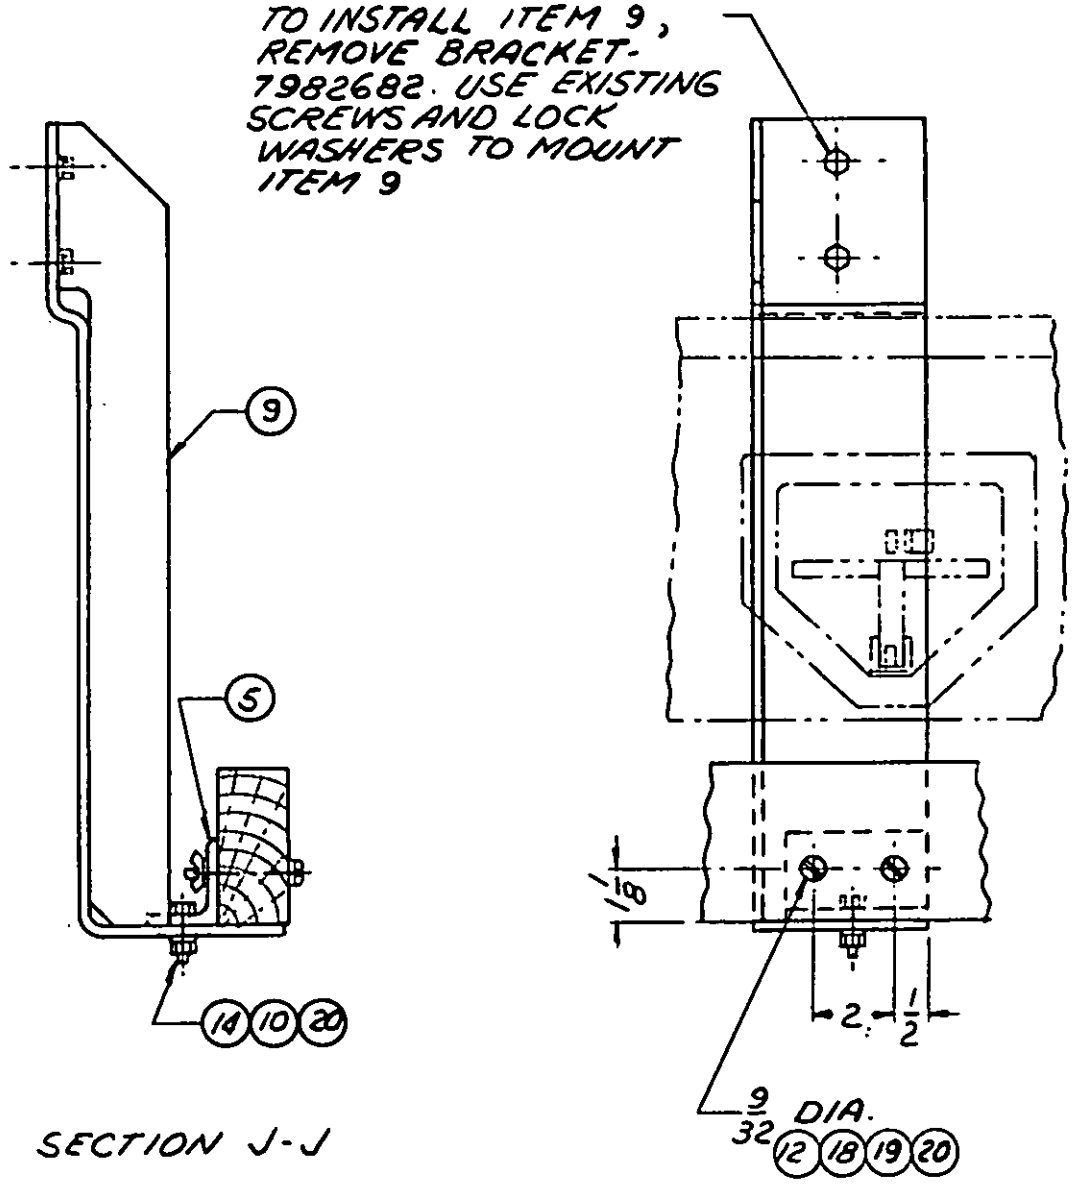


FIGURE 13

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

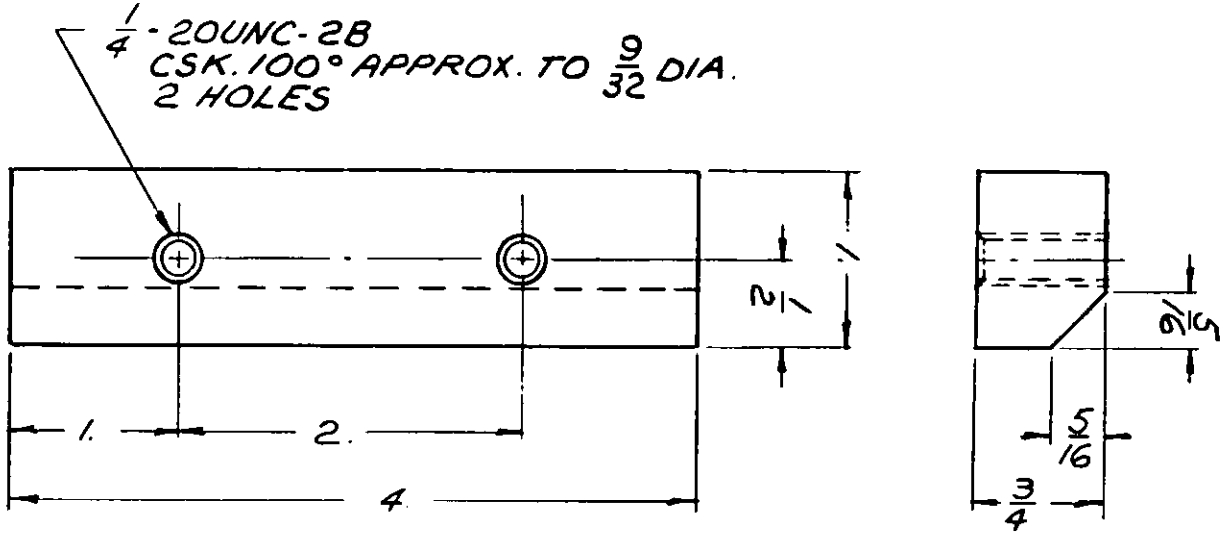

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 7

MATERIAL NOTE:
SEE NOTE I, FIG 7

FIGURE 14
BLOCK

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

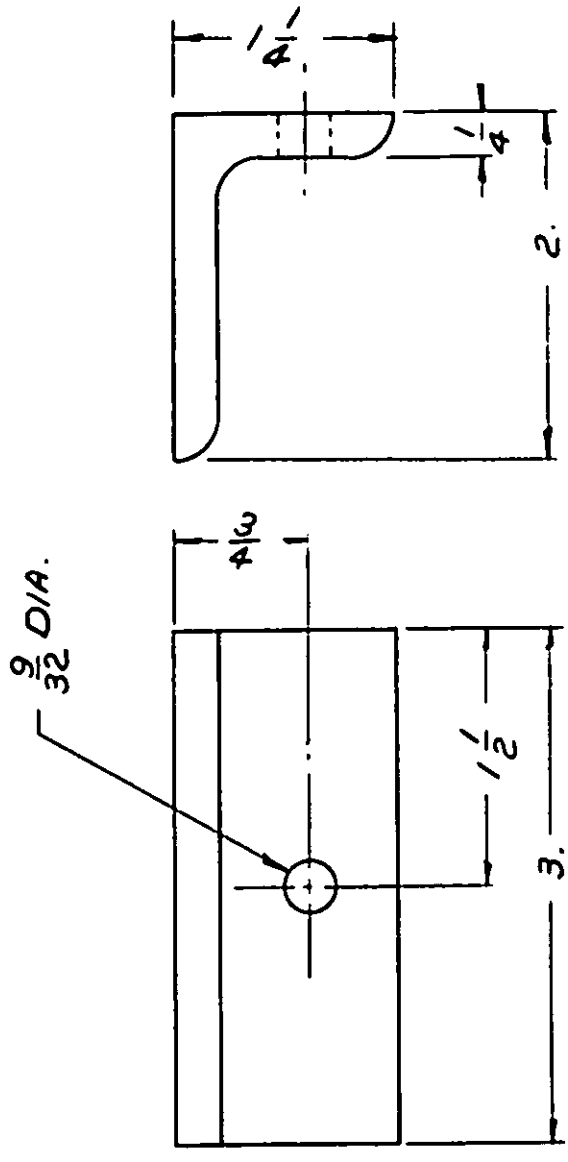


FIGURE 15
ANGLE

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 7

MATERIAL NOTE
SEE NOTE II, FIG. 7

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST- BRACKET ASSEMBLY, FRONT TIE DOWN

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	18	BRACKET	1
2	19	GUSSET	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL- CARBON FS1010 THRU FS1025
SPEC. QQ-S-633

WELDING NOTE- STEEL

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

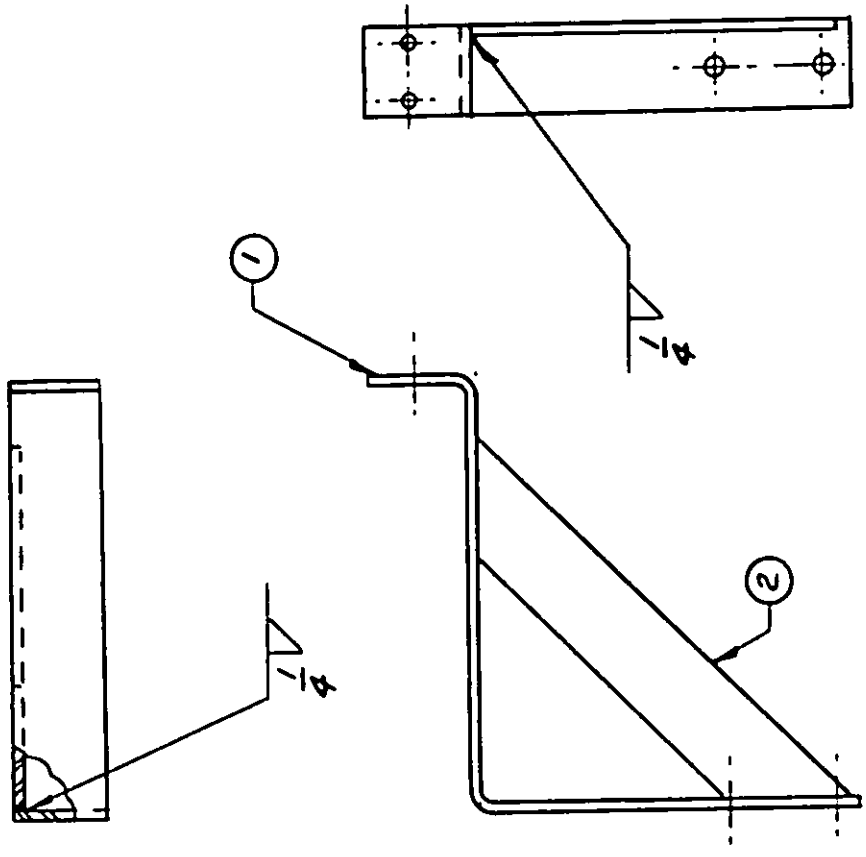


FIGURE 17
BRACKET ASSEMBLY, FRONT TIE DOWN

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 16

WELDING NOTE
SEE NOTE I, FIG. 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

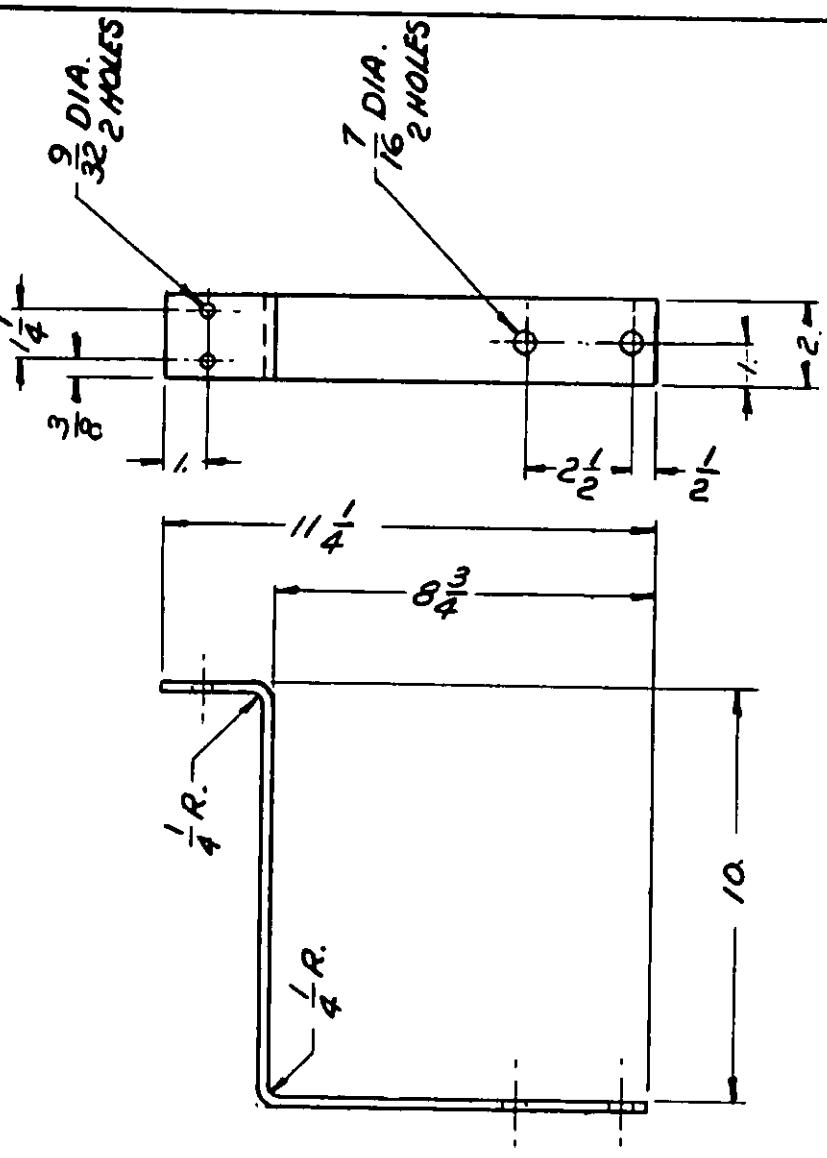


FIGURE 18
BRACKET

MATERIAL NOTE:
SEE NOTE I, FIG. 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

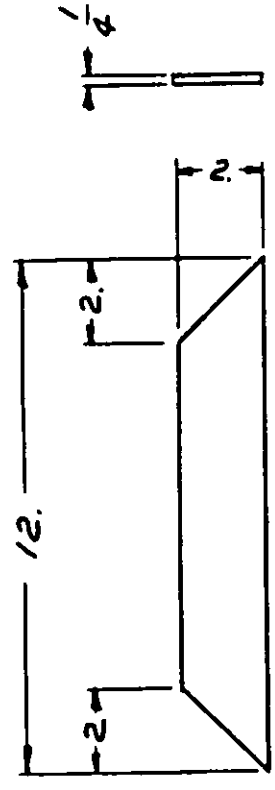


FIGURE 19
GUSSET

MATERIAL NOTE:
SEE NOTE 1, FIG 16

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST- BRACKET ASSEMBLY, SIDE

ITEM NO	FIG. NO.	PART NAME	REQ'D.
1	22	BRACKET	1
2	23	SUPPORT	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL- CARBON FS1010 THRU FS1025
SPEC. QQ-S-638

WELDING NOTE-STEEL

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 20

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

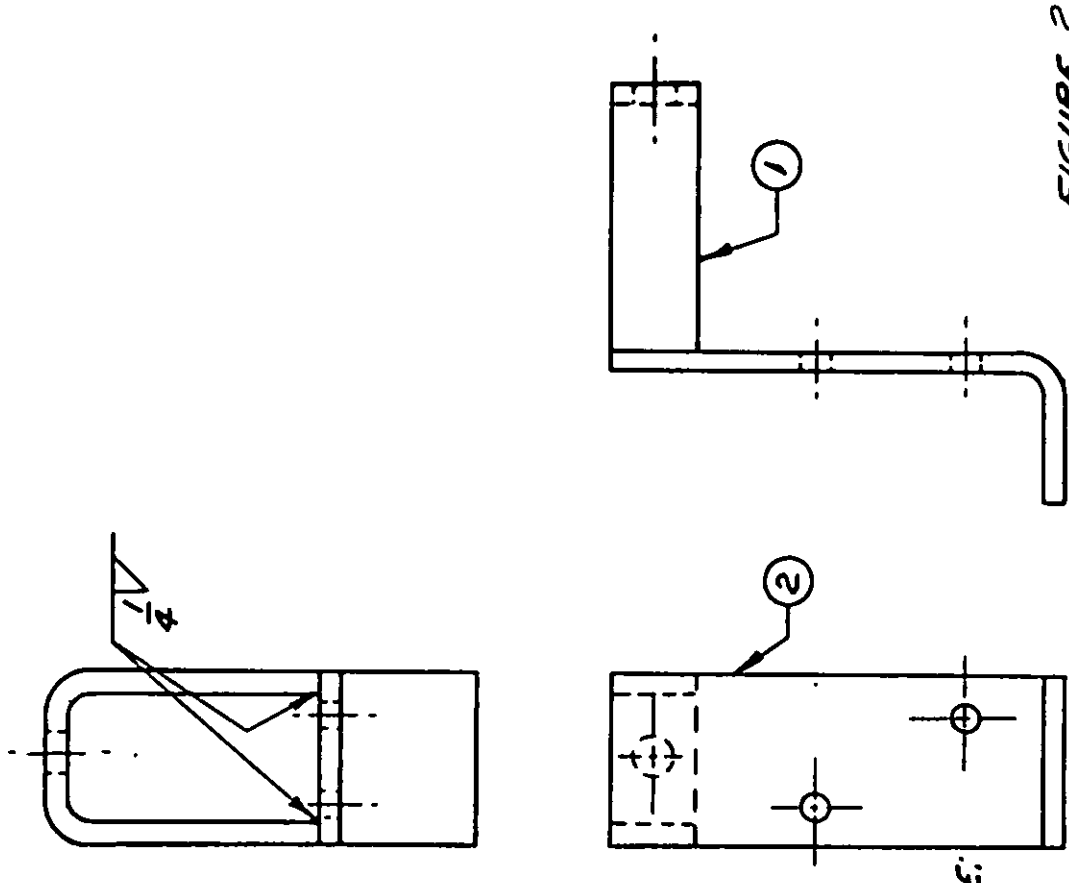


FIGURE 21
BRACKET ASSY., SIDE

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 20

WELDING NOTE:
SEE NOTE I, FIG 20

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


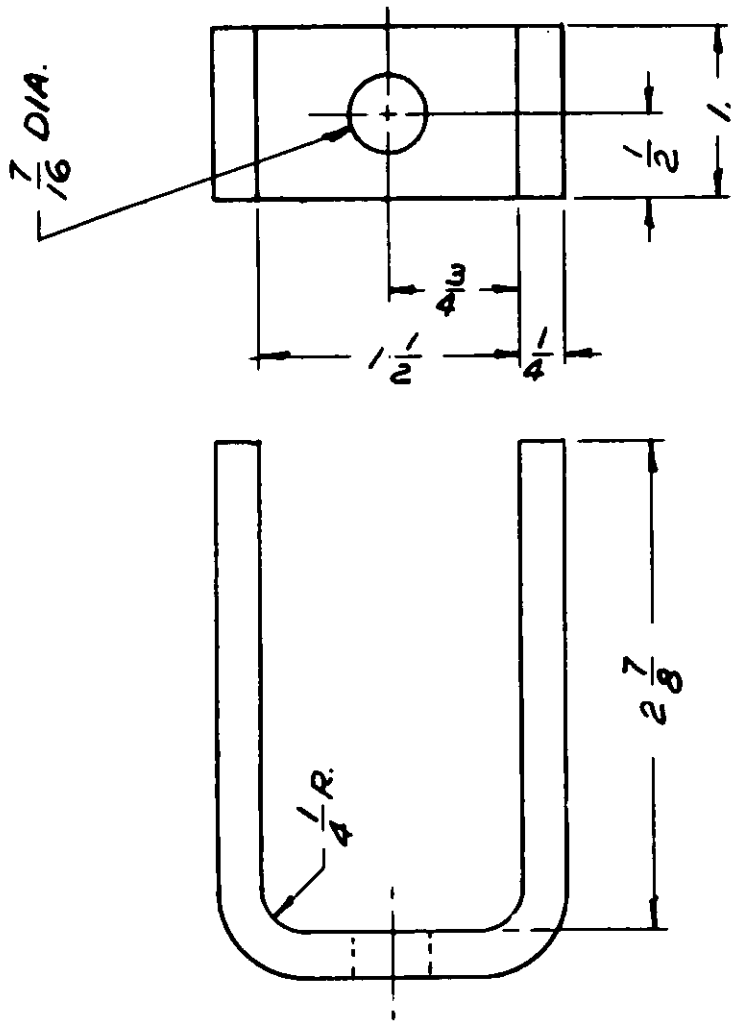


FIGURE 22
BRACKET

MATERIAL NOTE:
SEE NOTE 1, FIG. 20

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

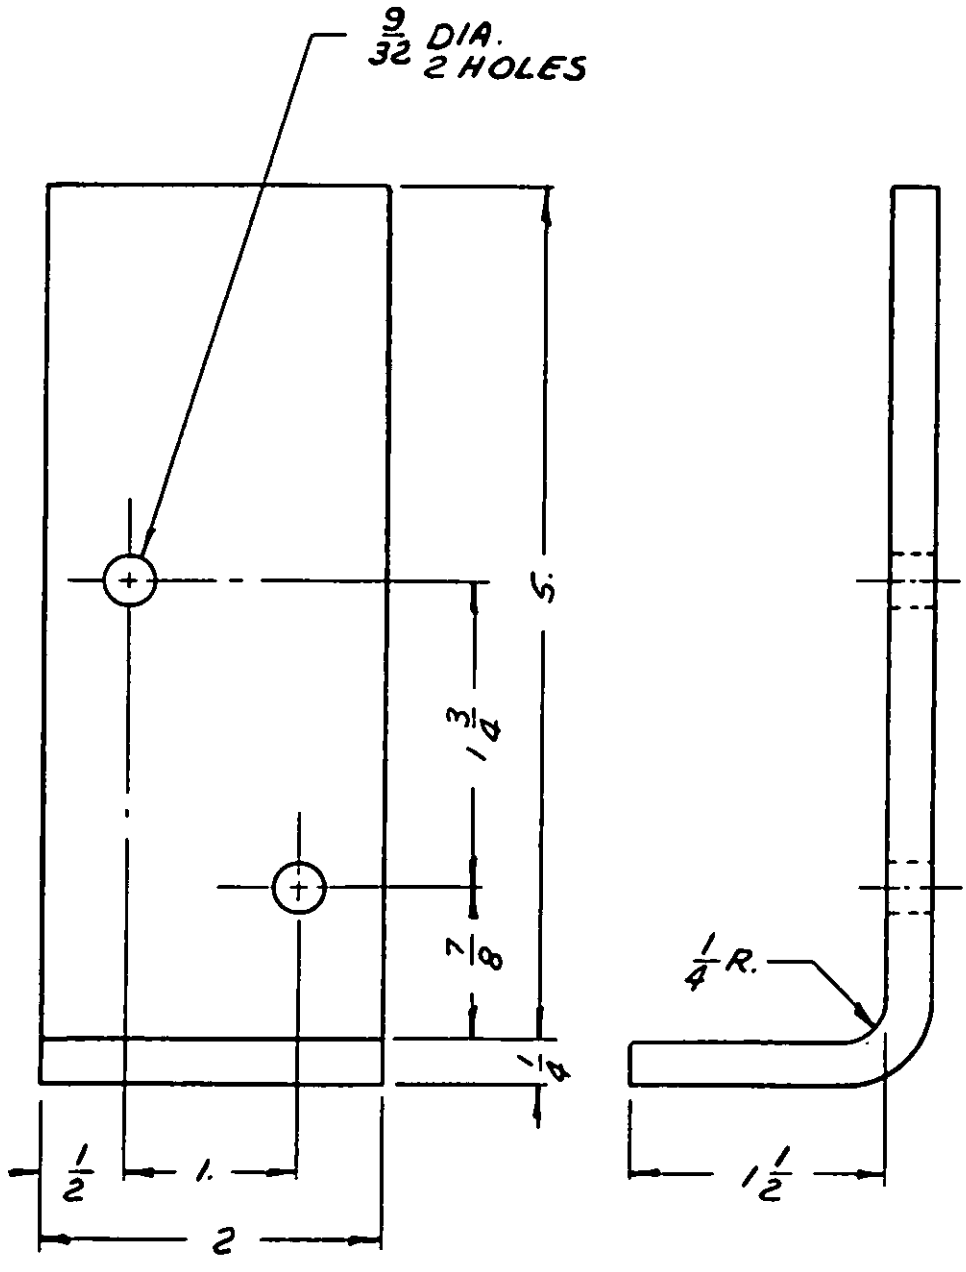

MATERIAL NOTE:
SEE NOTE I, FIG. 20

FIGURE 23
SUPPORT

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST- SUPPORT ASSEMBLY, LEFT INTERMEDIATE

ITEM NO	FIG. NO	PART NAME	REQ'D.
1	26	SUPPORT	1
2	27	STIFFENER	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL-CARBON FS1010 THRU FS1025
SPEC. QQ-S-633

WELDING NOTE - STEEL:


I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 24

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

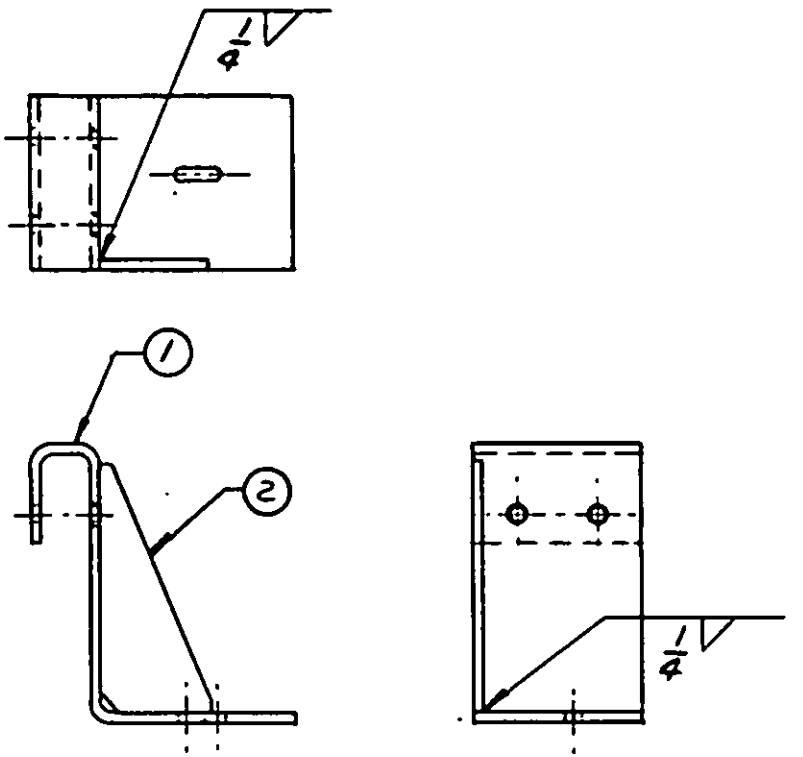

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 24.

WELDING NOTE:
SEE NOTE I, FIG. 24

FIGURE 25
SUPPORT ASSEMBLY LEFT
INTERMEDIATE

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

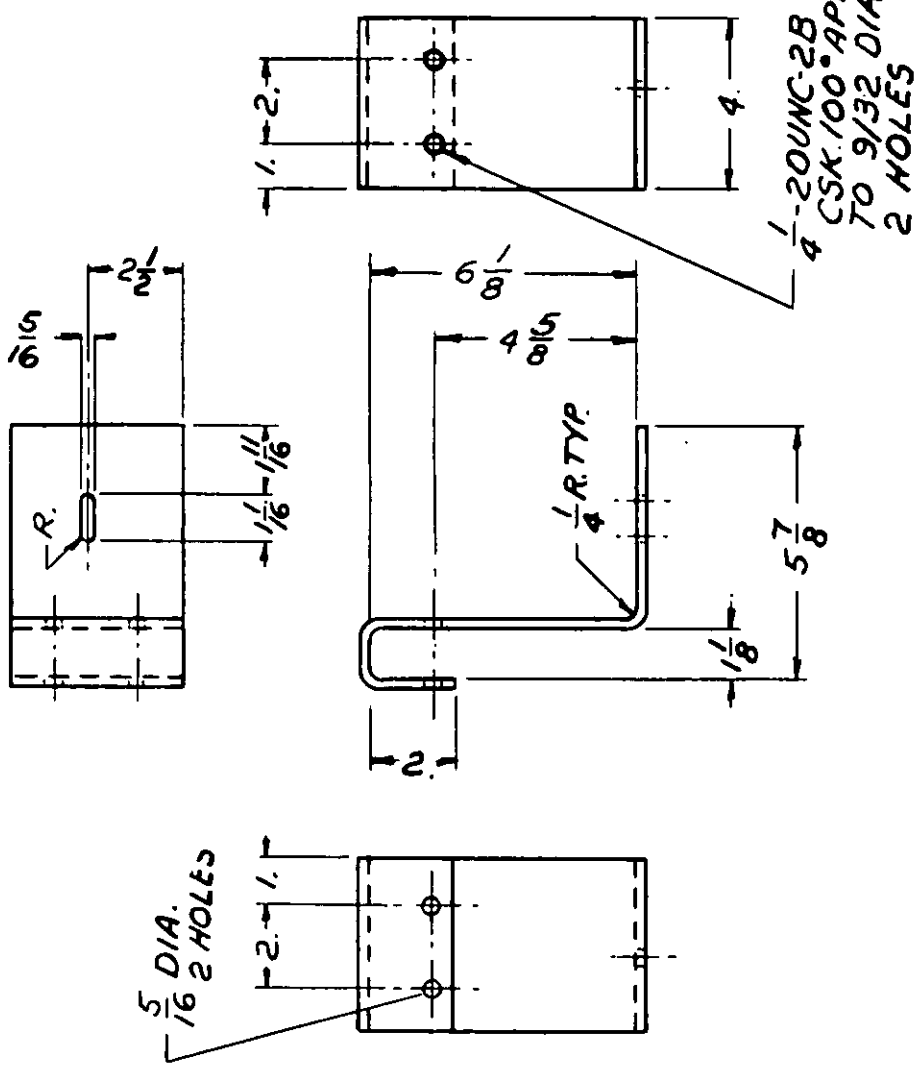


FIGURE 26
SUPPORT

MATERIAL NOTE:
SEE NOTE 1, FIG. 24

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

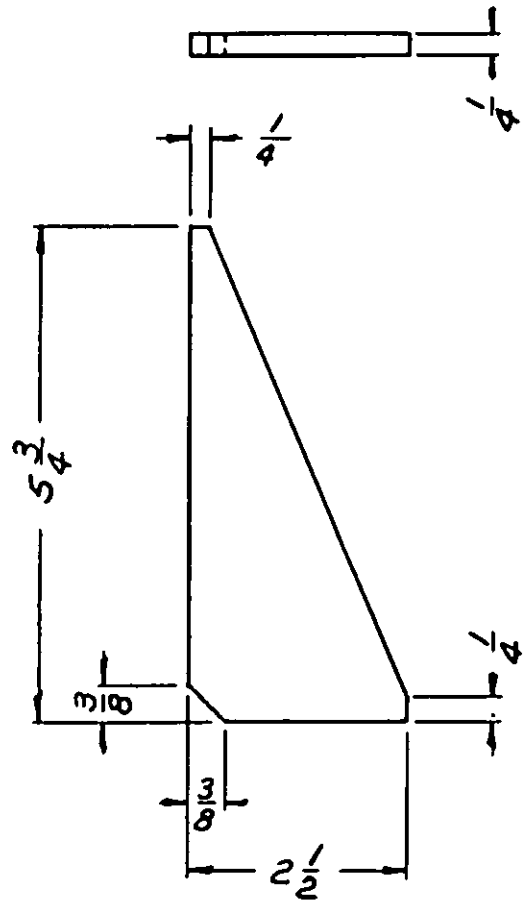


FIGURE 27
STIFFENER

MATERIAL NOTE:
SEE NOTE 1, FIG. 24

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - SUPPORT ASSEMBLY, REAR

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	30	CLAMP	1
2	31	PLATE	1
3	32	ANGLE	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL - CARBON FS1010 THRU FS1025
SPEC. QQ-S-633

II STEEL
CLASS A
SPEC. MIL-S-13281
1 1/4 x 1 1/4 x 1/4 ANGLE

WELDING NOTE - STEEL

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 28

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

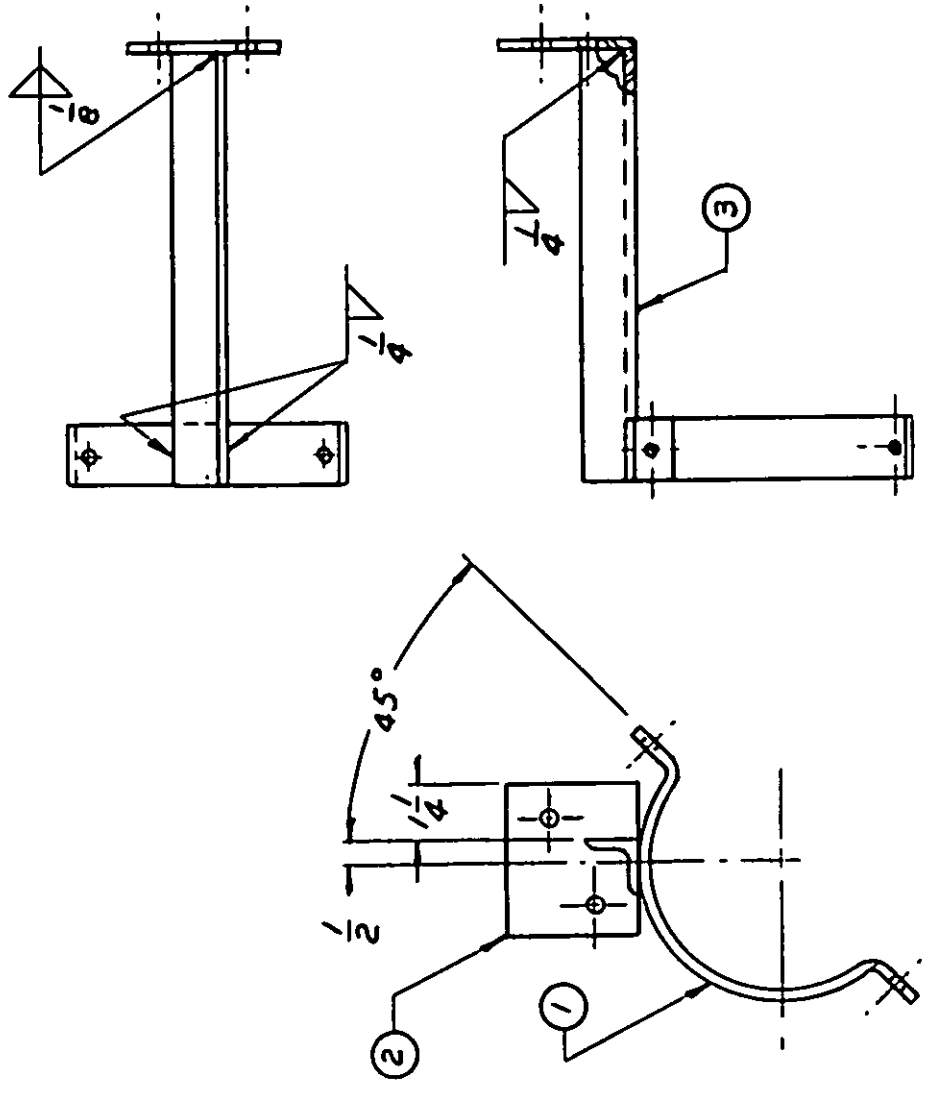


FIGURE 29
SUPPORT ASSEMBLY, REAR

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 28

WELDING NOTE:
SEE NOTE I, FIG. 28

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

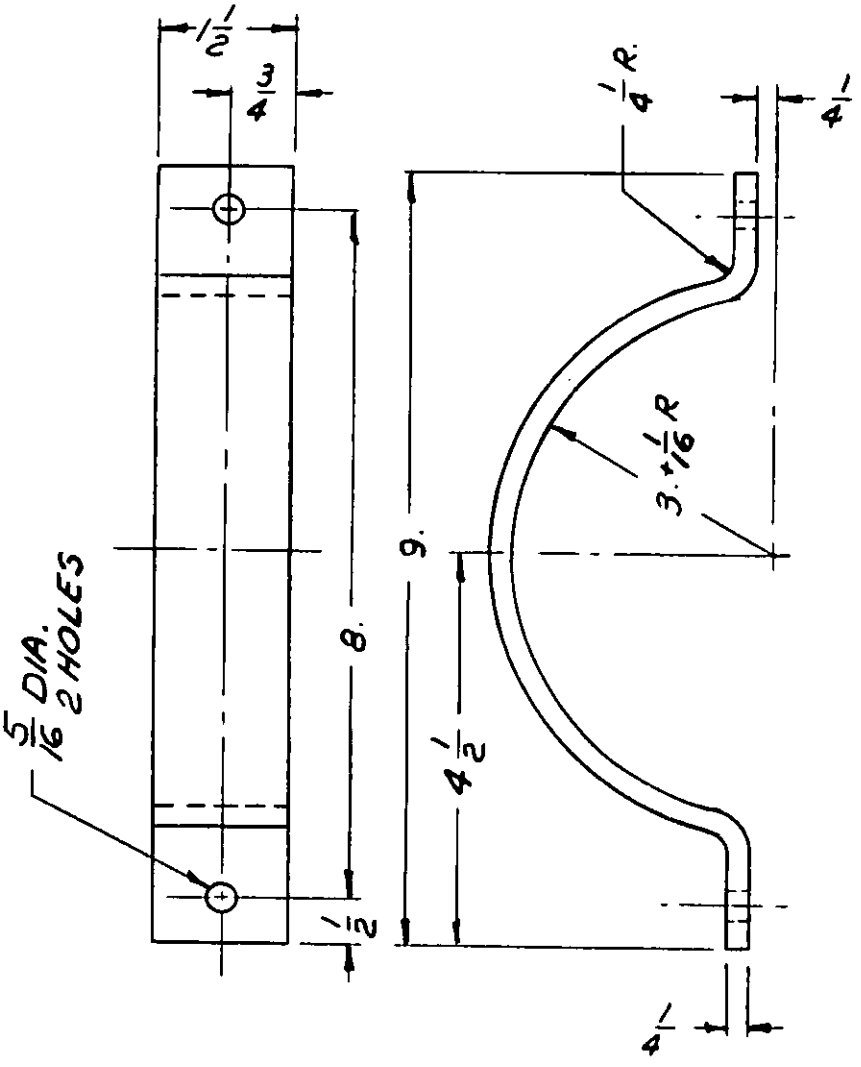


FIGURE 30
CLAMP

MATERIAL NOTE:
SEE NOTE 1, FIG. 28

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

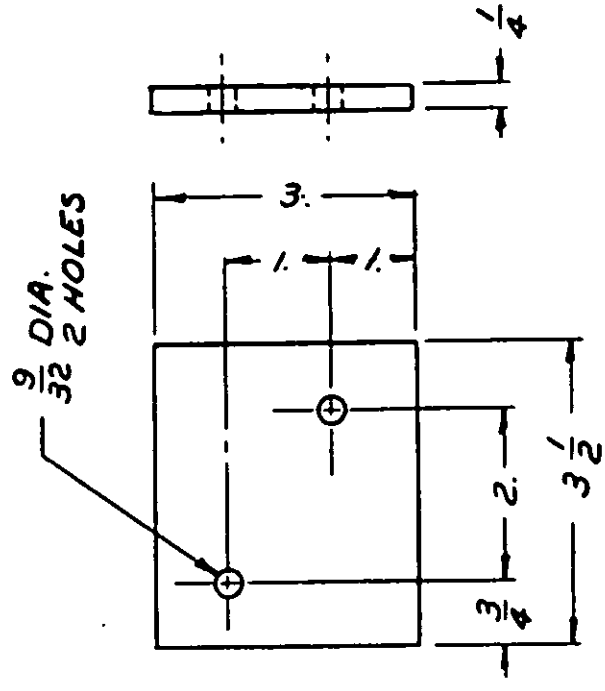


FIGURE 31
PLATE

MATERIAL NOTE
SEE NOTE I, FIG. 28

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

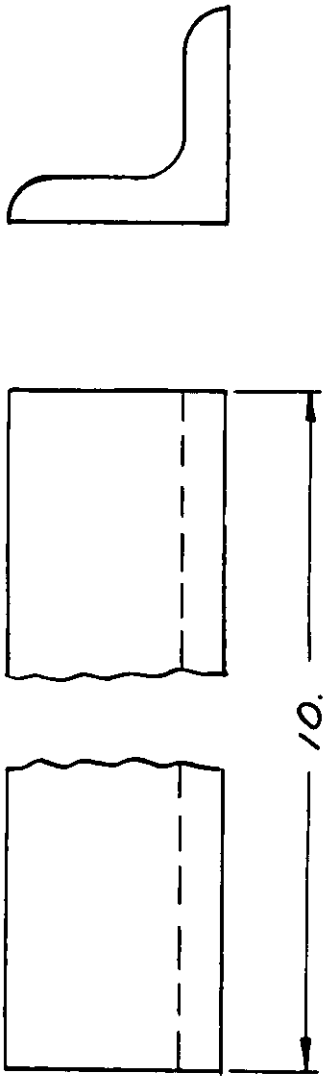


FIGURE 32
ANGLE

MATERIAL NOTE:
SEE NOTE II, FIG. 28

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST- SUPPORT ASSEMBLY, RIGHT INTERMEDIATE

ITEM NO	FIG. NO.	PART NAME	REQ'D
1	35	SUPPORT	1
2	36	STIFFENER	1

SPECIFICATIONS:

MATERIAL NOTE:

1 STEEL-CARBON FS1010 THRU FS1025
SPEC. QQ-S-633

WELDING NOTE-STEEL


1 WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

1 PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 33

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

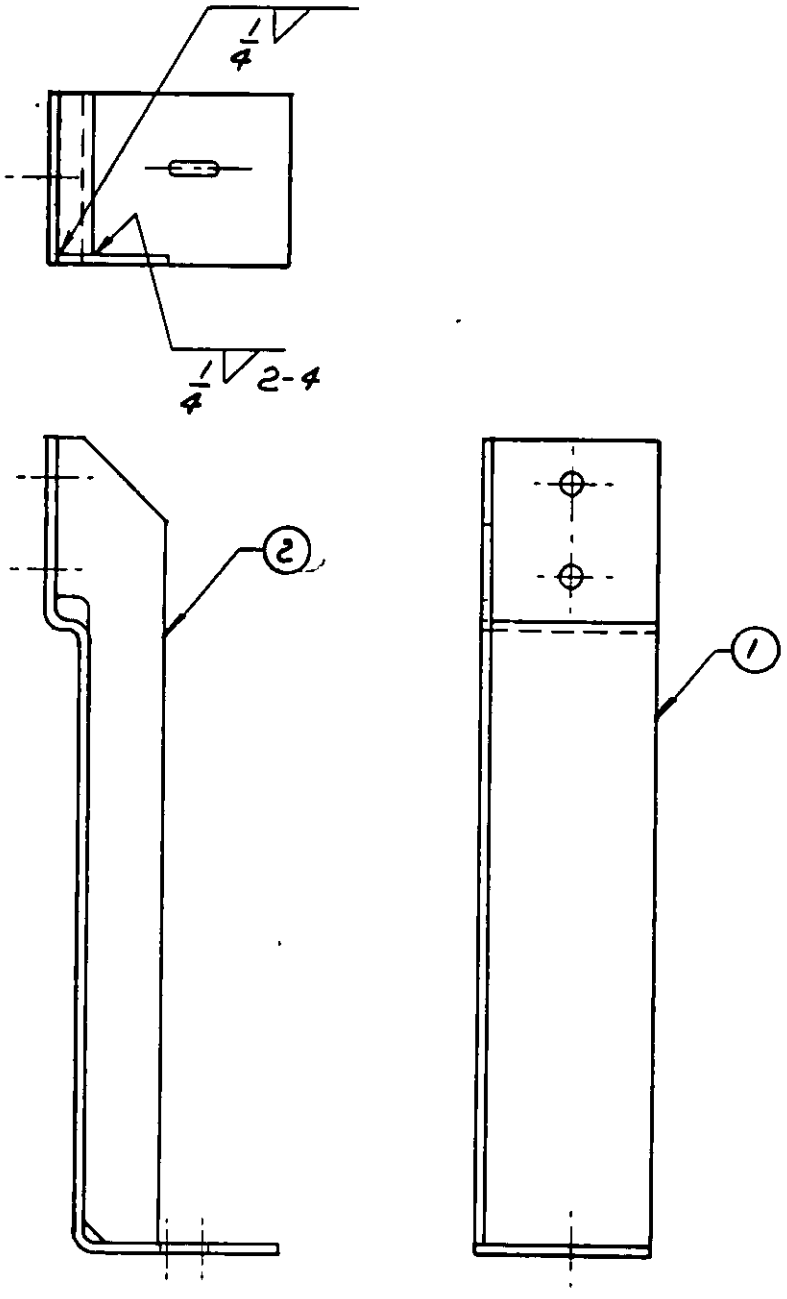

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 33

WELDING NOTE:
SEE NOTE I, FIG. 33

FIGURE 34
SUPPORT ASSEMBLY, RIGHT INTERMEDIATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

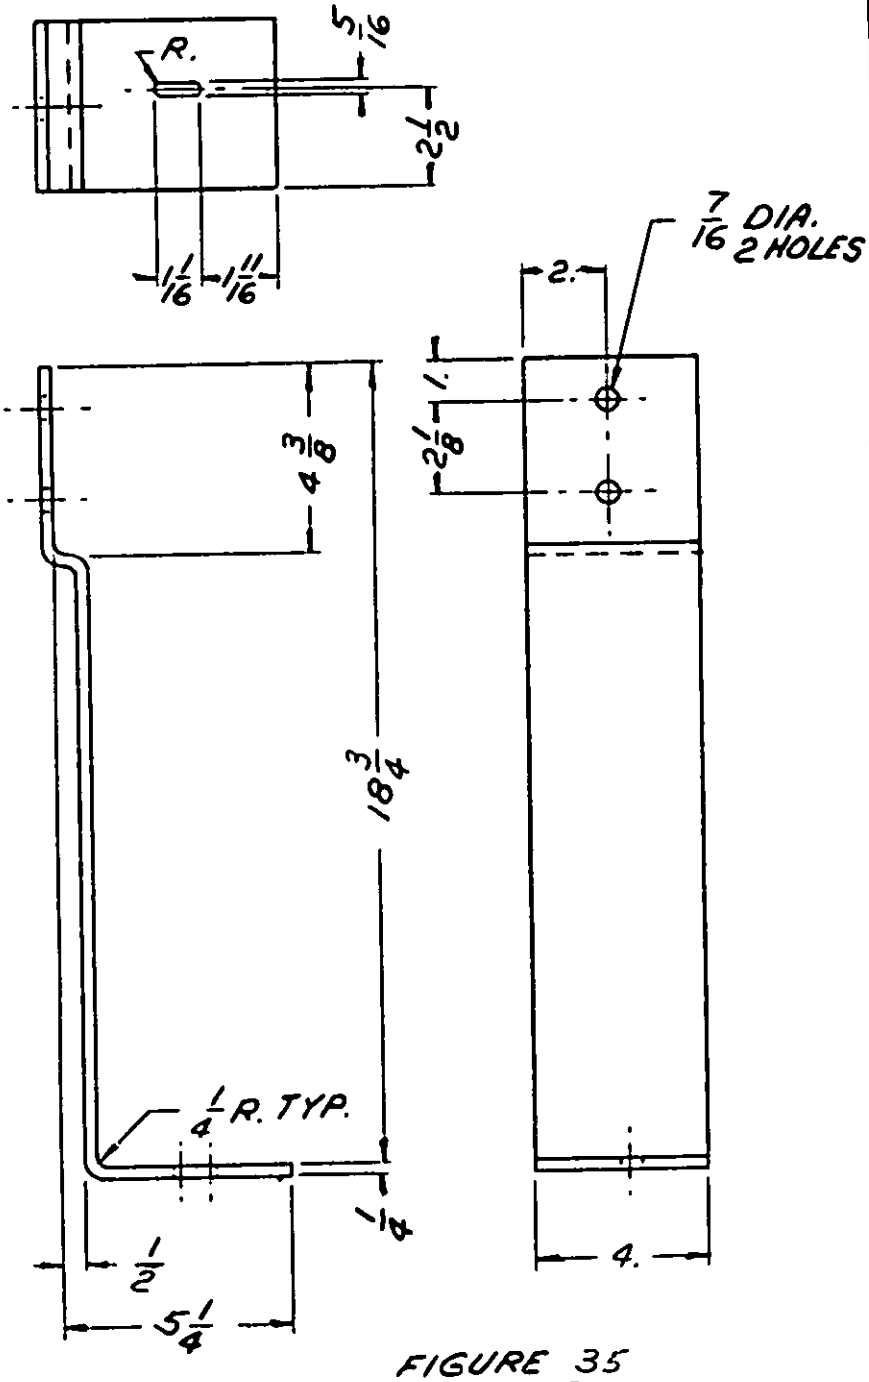


FIGURE 35
SUPPORT

MATERIAL NOTE:
SEE NOTE I, FIG. 33

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

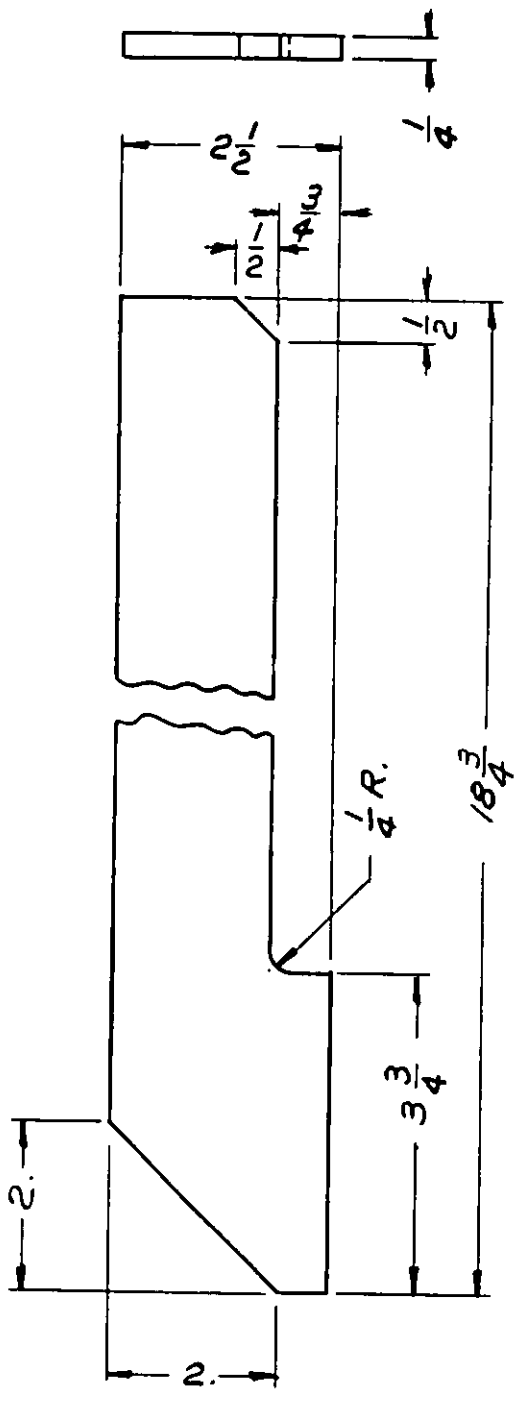


FIGURE 36
STIFFENER

MATERIAL NOTE:
SEE NOTE I, FIG. 33

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - FRAME ASSEMBLY, WATERSHED

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1.	39	BEAM, SIDE	4
2	40	BEAM, INTERMEDIATE SIDE	2
3	41	BEAM, FRONT & REAR	4
4	42	CONNECTOR, BEAM	8
5	53	PLATE, CORNER	4
6	52	PLATE ASSEMBLY, CORNER	4
7	43	TUBE, SIDE	4
8	56	TUBE ASSEMBLY, SIDE	4
9	61	TUBE ASSEMBLY, SIDE	4
10	64	TUBE ASSEMBLY, SIDE	4
11	67	TUBE ASSEMBLY, SIDE	2
12	44	BOW, TOP	9
13	45	TUBE, END	6
14	46	TUBE, INTERMEDIATE	3
15	47	CONNECTOR, TUBE	6
16	48	BOW, SUPPORT	4
17	49	TUBE, SUPPORT	8
18	50	BRACE	8

STANDARD HARDWARE

ITEM NO.	REQ'D.	PART NAME	SIZE	ORDNANCE PART NO.
19	107	SCREW, PAN HD.	1/4-20UNC-2A x 2 1/2LG	MS35223-89
20	16	SCREW, PAN HD.	1/4-20UNC-2A x 2. LG.	MS35223-87
21	52	SCREW, PAN HD.	1/4-20UNC-2A x 1 1/2LG	MS35223-85
22	2	SCREW, HEX. HD. CAP	1/4-20UNC-2A x 3 1/2 LG.	MS35291-20
23	16	SCREW, HEX. HD. CAP	1/4-20UNC-2A x 5. LG.	MS35291-26
24	193	NUT, WING	1/4-20UNC-2B	MS35425-14
25	193	WASHER, LOCK	1/4 DIA.	MS35337-25

FIGURE 37A

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS:

MATERIAL NOTE:

I LUMBER DOUGLAS FIR
CLEAR SURFACE 4 SIDES
SPEC. MM-L-751
COMMERCIAL SIZE 2.x4.

II STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I CONDITION HR
SPEC. QQ-T-00825
EXCEPT RECTANGULAR
2. x 4. x 3/16 WALL THICKNESS

III STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, IV CONDITION HR, W, CDSR
SPEC. QQ-T-00825
1. O.D. x .065 WALL THICKNESS

IV STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, IV CONDITION HR, W, CDSR
SPEC. QQ-T-00825
1 1/8 O.D. x .049 WALL THICKNESS

PROTECTIVE FINISH NOTE:

I ENAMEL SEMI-GLOSS COLOR O.D.
TYPE OPTIONAL
SPEC. TT-E-485 OR TT-E-529

OPTIONAL PROTECTIVE FINISH
CREOSOTE SPEC. TT-W-568
SOAK 4 TO 6 MINUTES AT
TEMPERATURE BETWEEN 70°F & 80°F

PAINT ALL OVER - 2 COATS

FIGURE 37B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PROTECTIVE FINISH NOTE:

II BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC. TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

NOTE:

I DISTANCE MARKED ⊗
TO BE FREE OF PAINT

II UNPAINTED TUBE ENDS TO
BE COATED WITH MIL-C-16173
CORROSION PREVENTIVE
OR TT-C-490, TYPE I,
PHOSPHATE PROTECTIVE COATING

FIGURE 37C

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

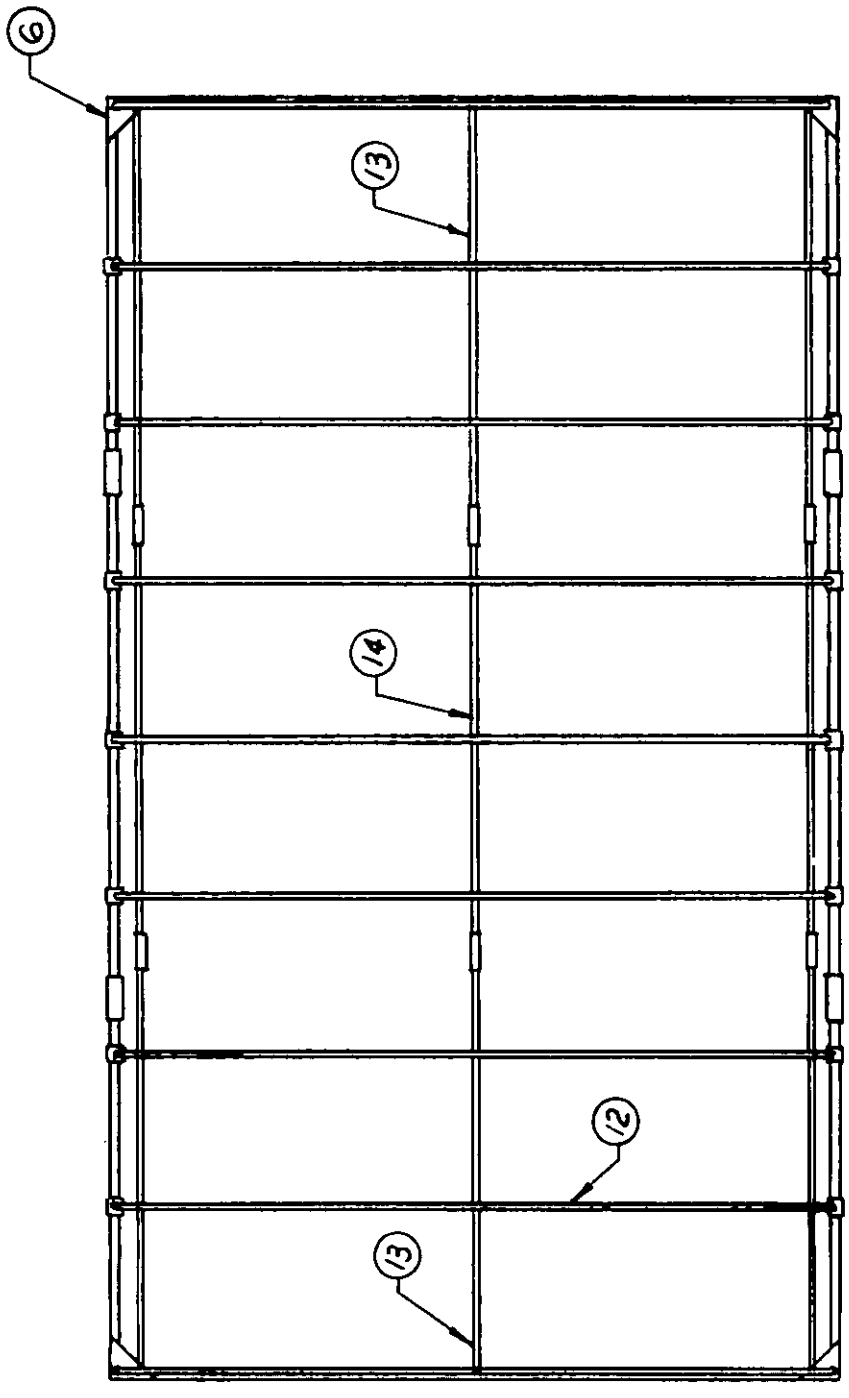


FIGURE 384
FRAME ASSEMBLY
PLAN VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

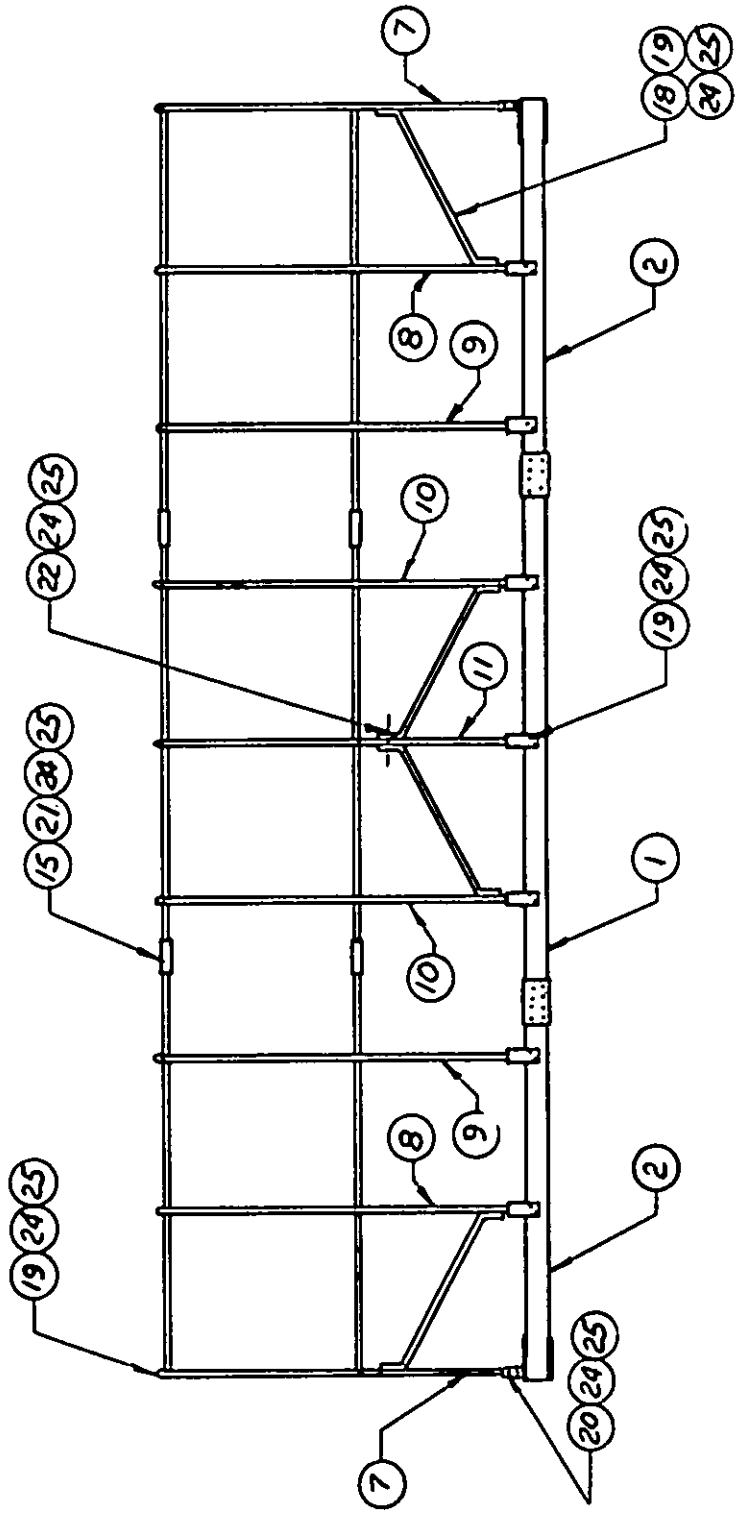


FIGURE 38B
FRAME ASSEMBLY
LEFT & RIGHT ELEVATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

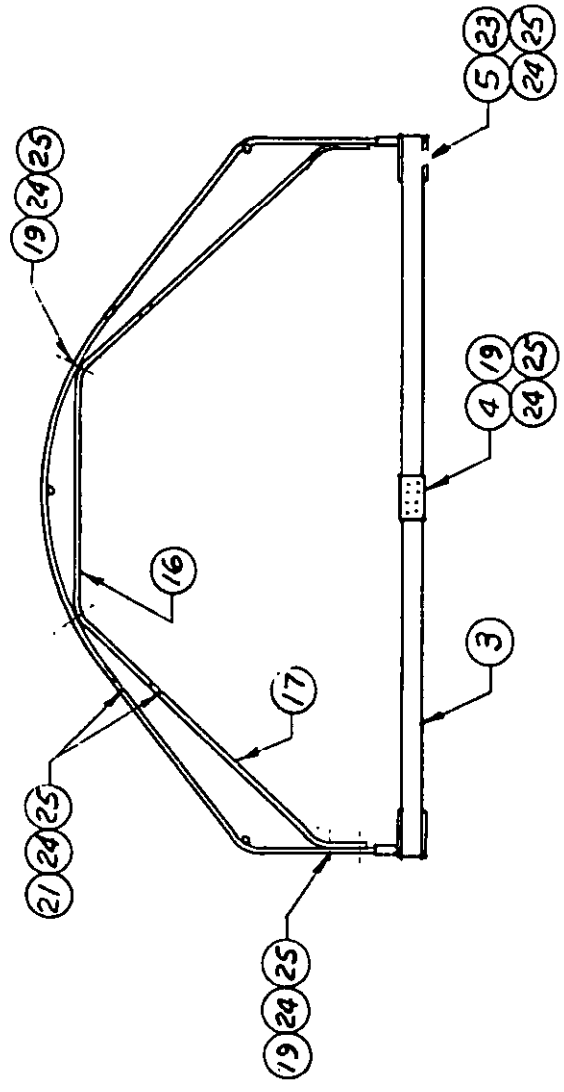


FIGURE 38C
FRAME ASSEMBLY
FRONT & REAR ELEVATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

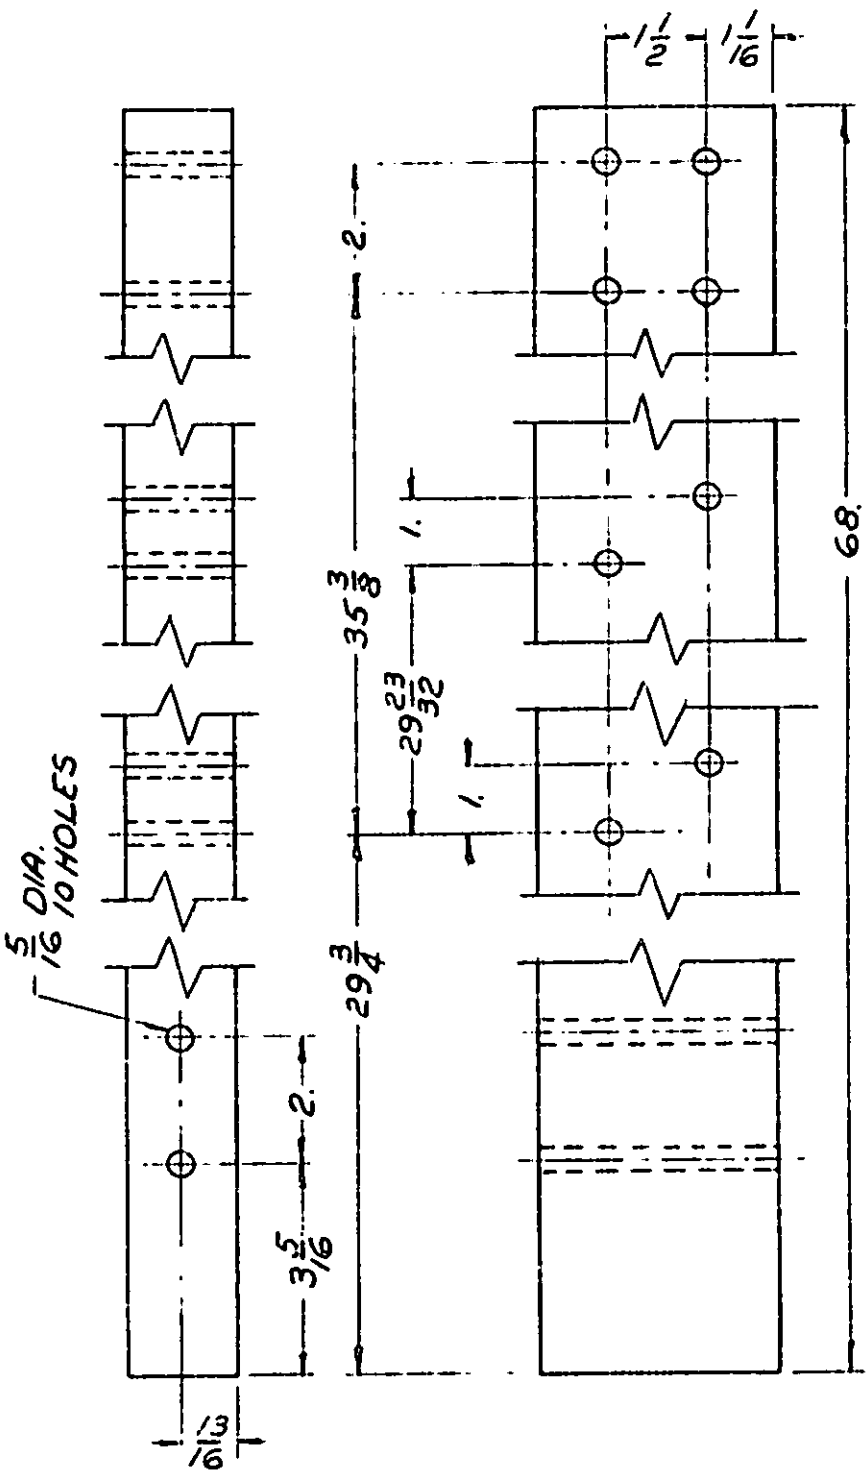


FIGURE 39
BEAM, SIDE

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 37

MATERIAL NOTE:
SEE NOTE I, FIG. 37

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

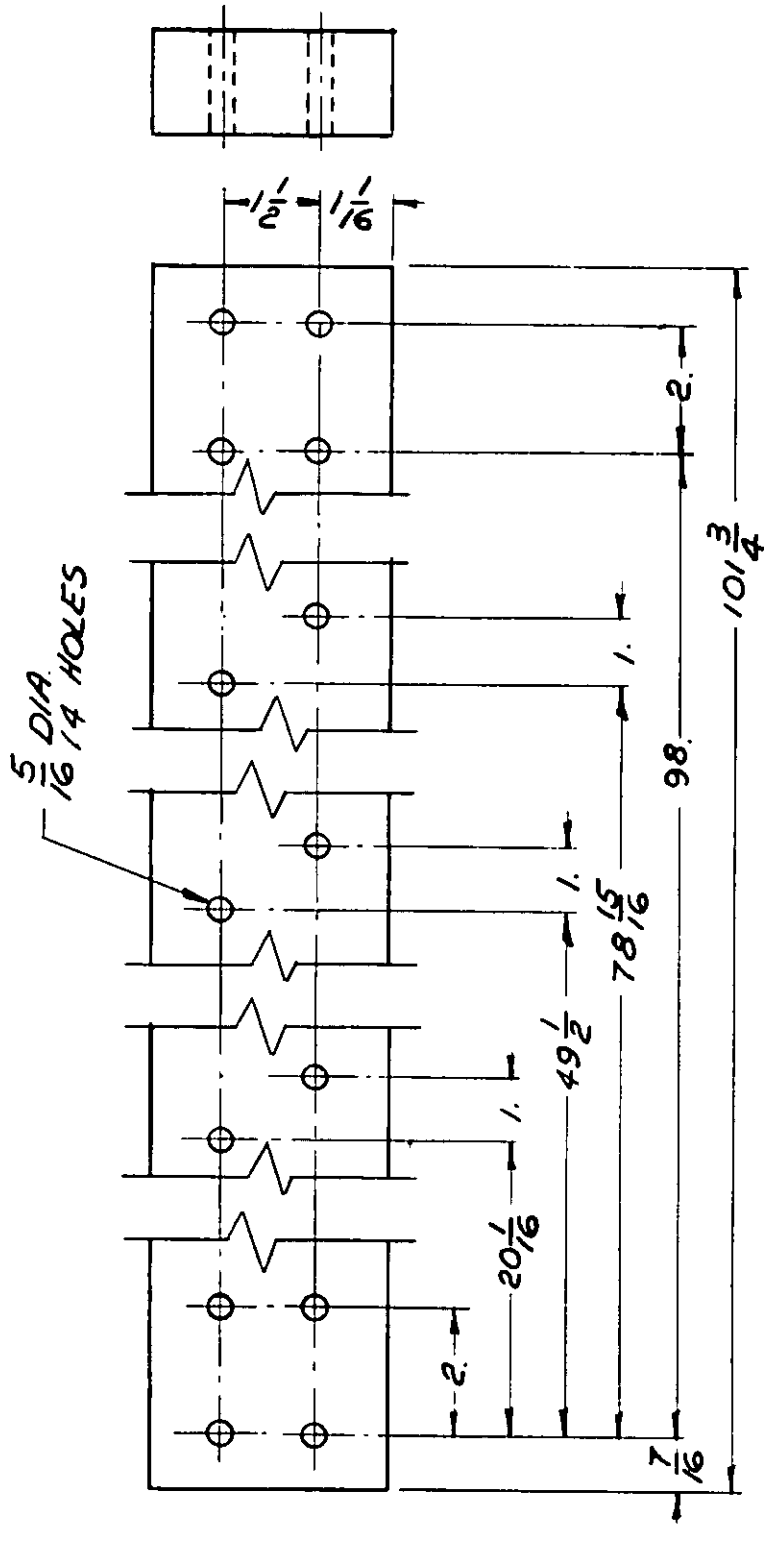


FIGURE 40
BEAM, INTERMEDIATE SIDE

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 37

MATERIAL NOTE:
SEE NOTE I, FIG. 37

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

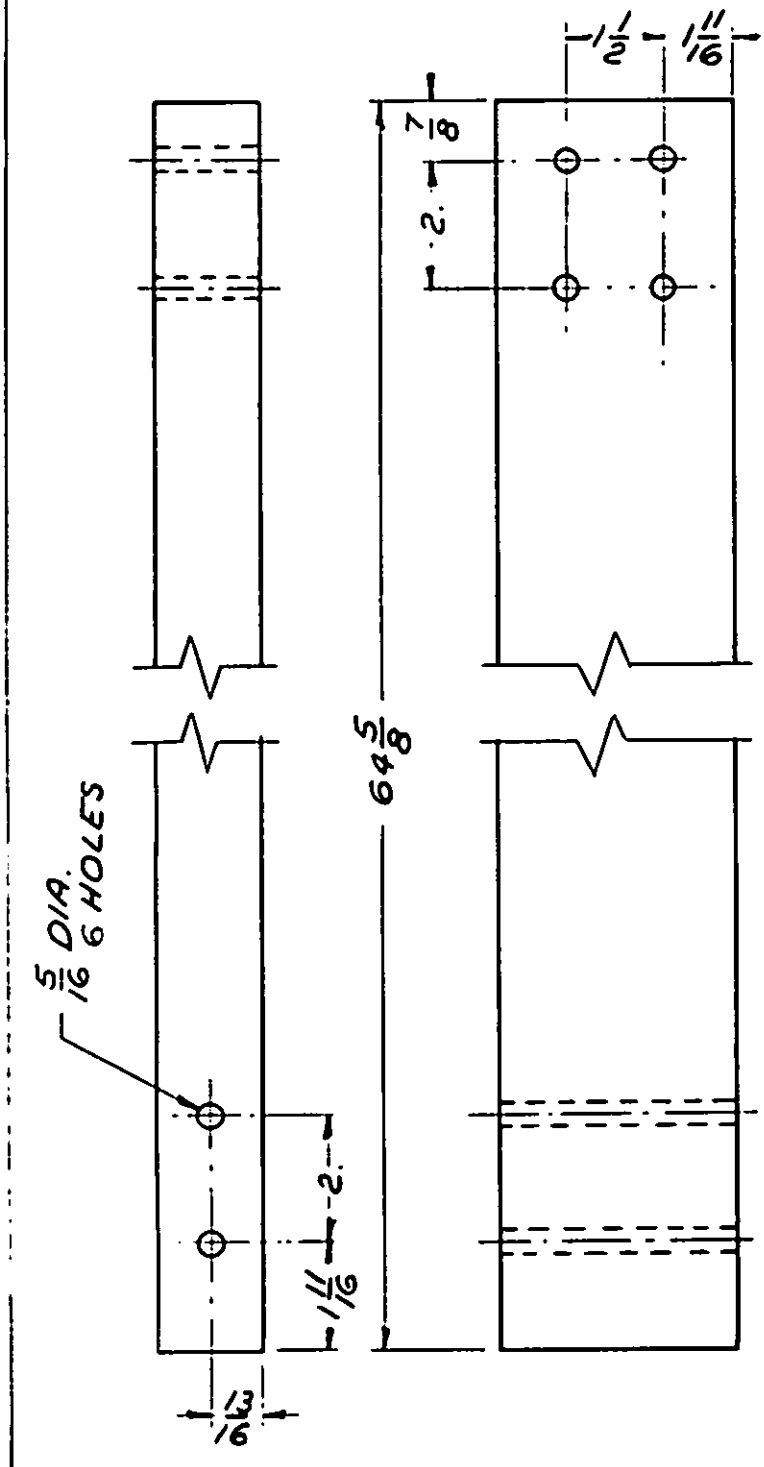


FIGURE 41
BEAM, FRONT & REAR

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 37

MATERIAL NOTE:
SEE NOTE I, FIG. 37

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

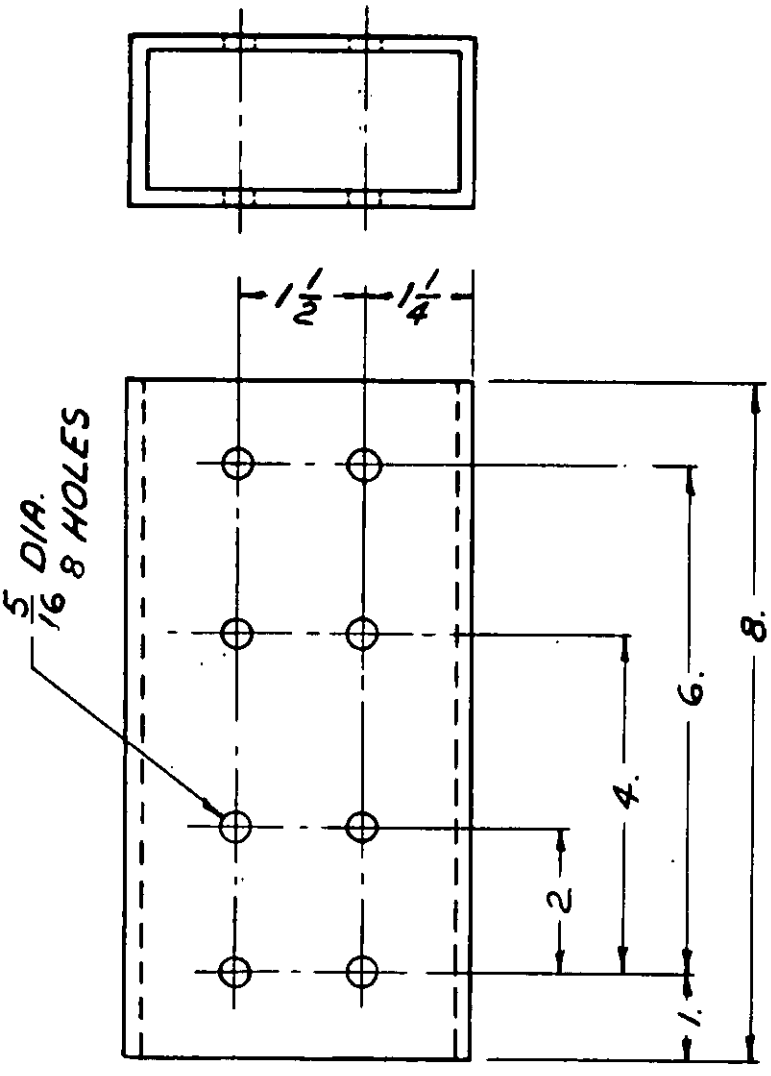


FIGURE 42
CONNECTOR, BEAM

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE II, FIG 37

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

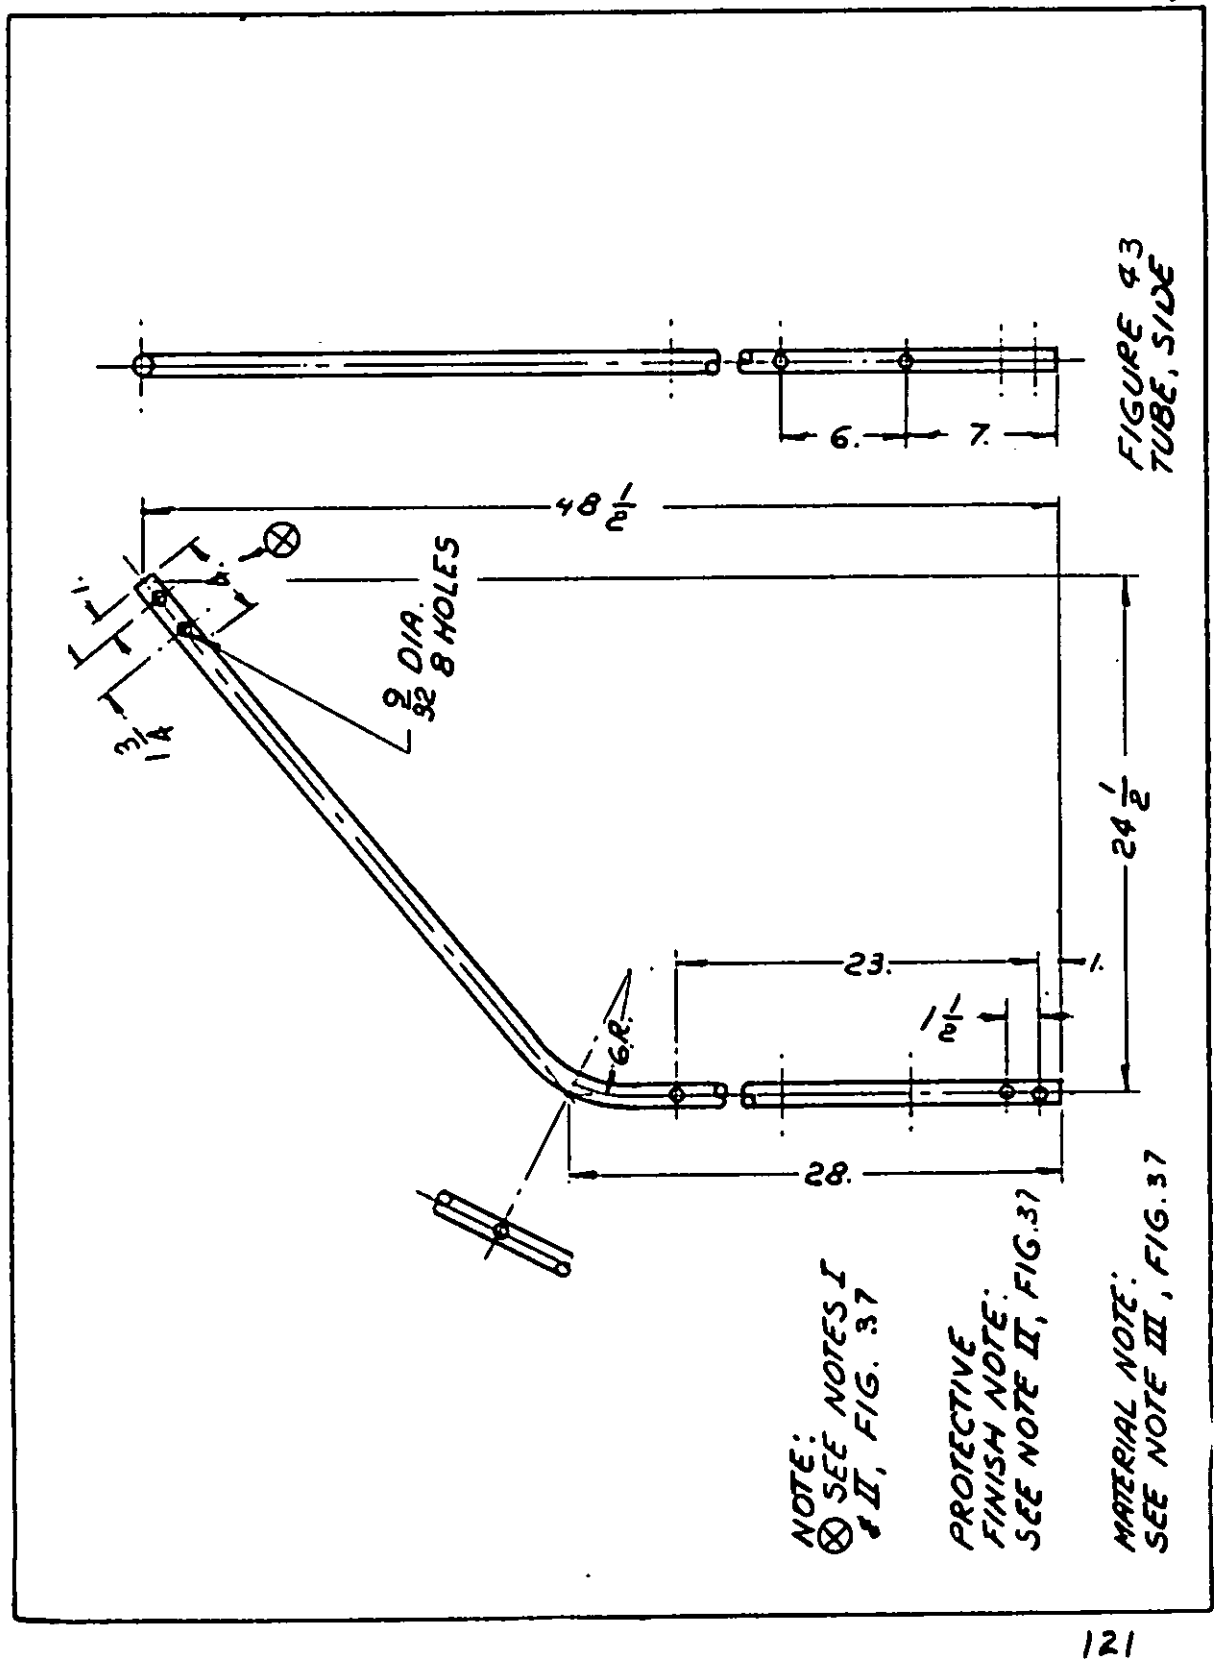


FIGURE 43
TUBE, SIDE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

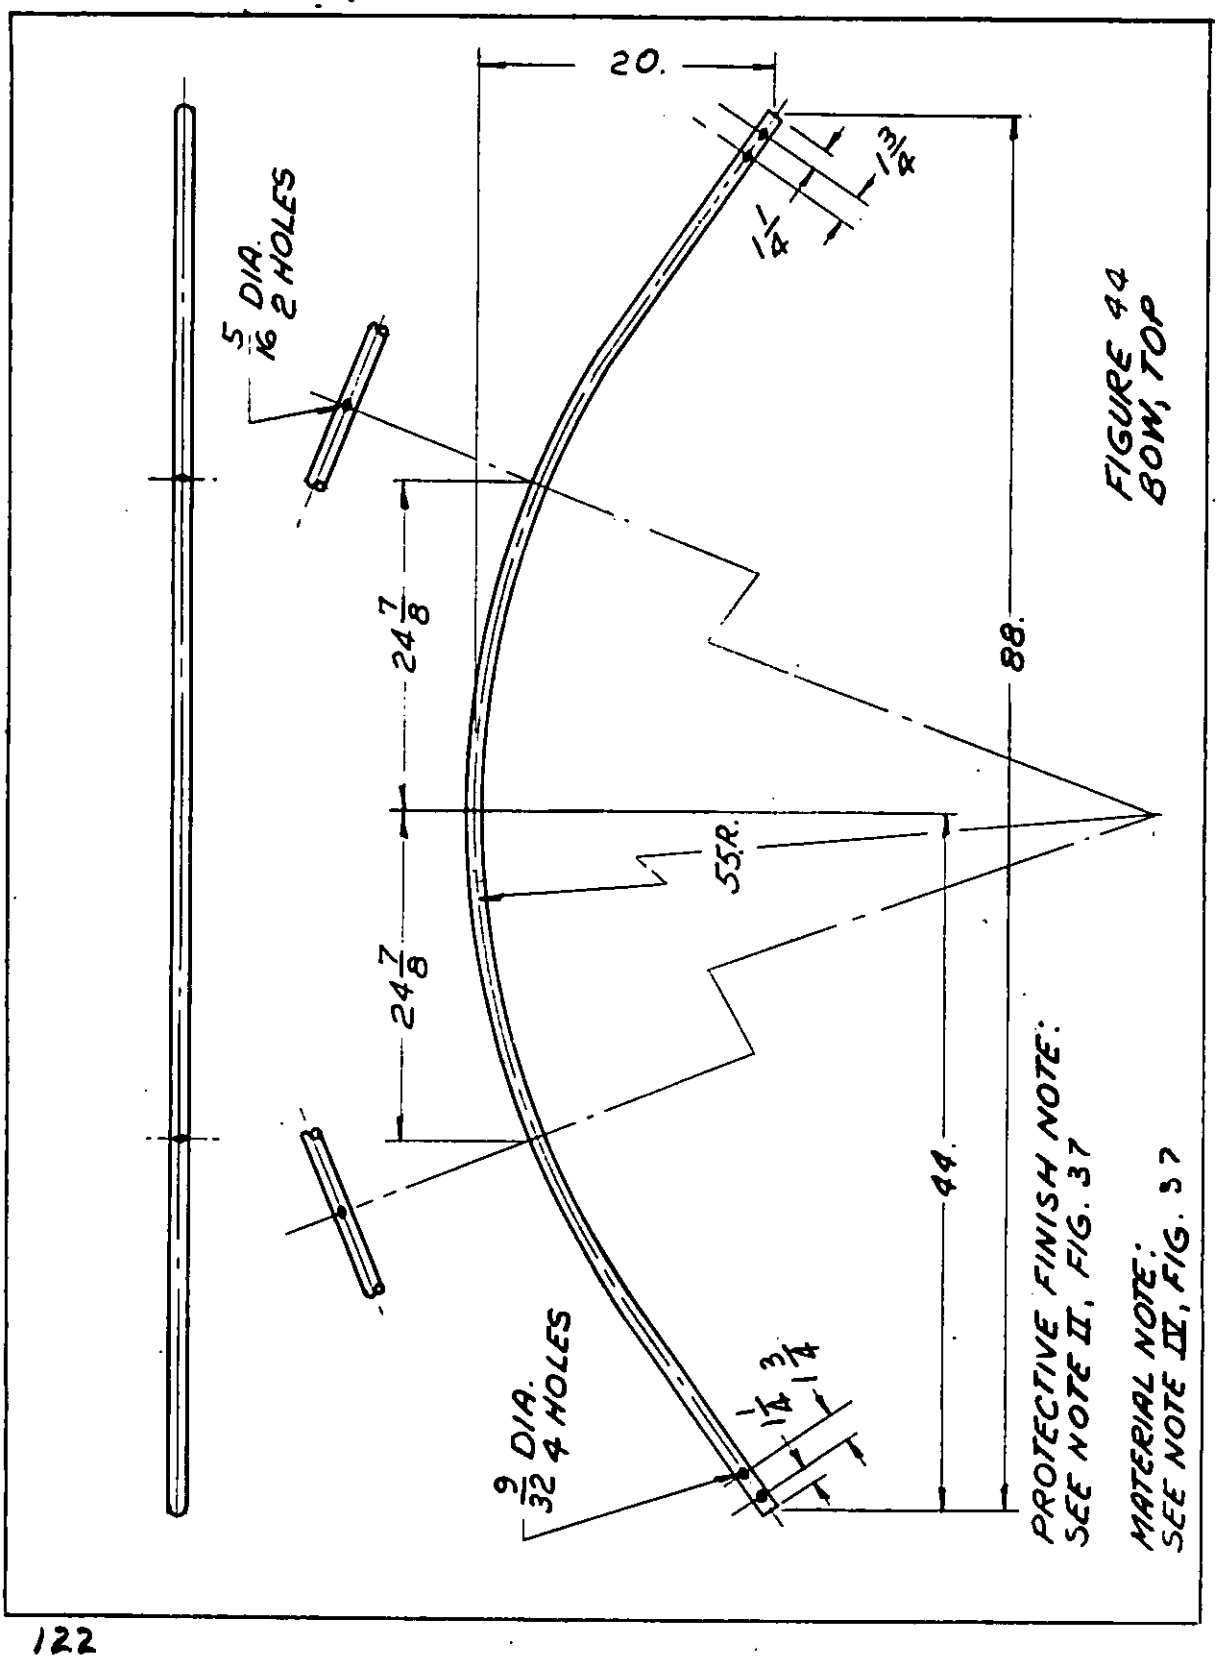


FIGURE 44
BOW, TOP

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

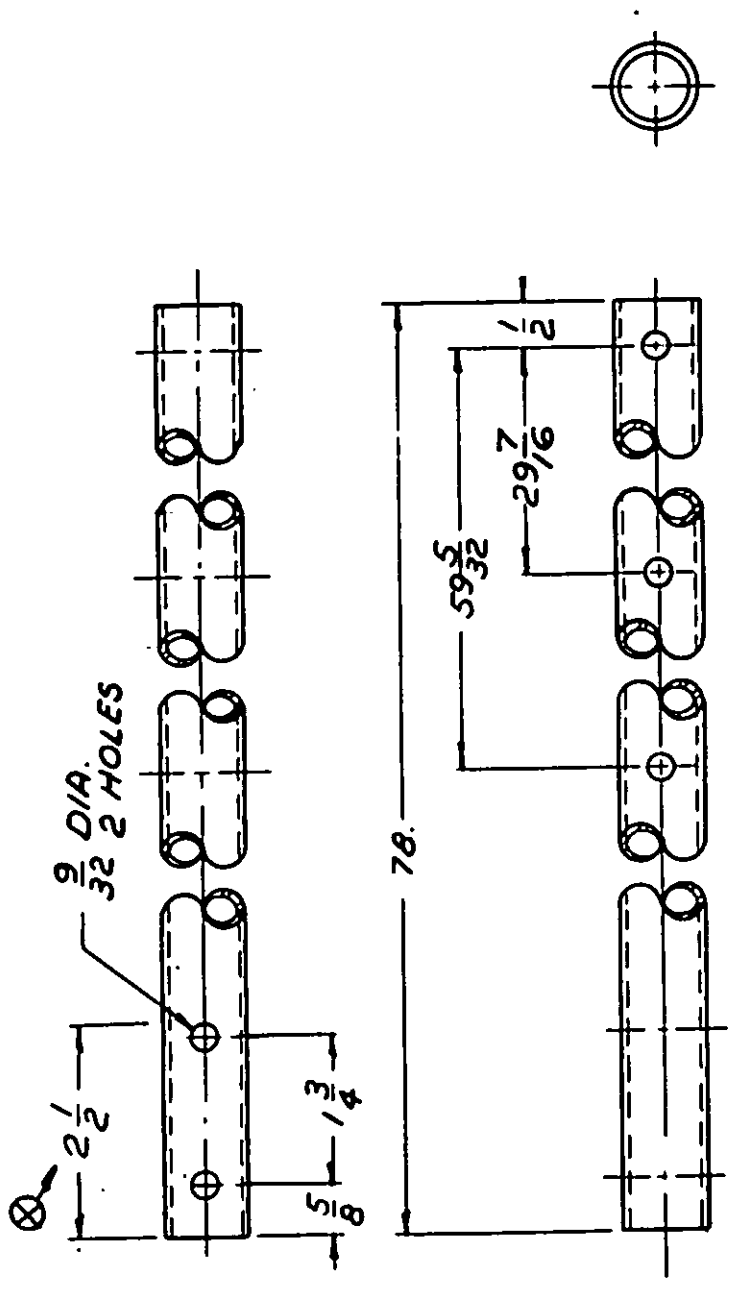



FIGURE 45
TUBE END

NOTE:
⊗ SEE NOTES I & II
FIG. 37

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

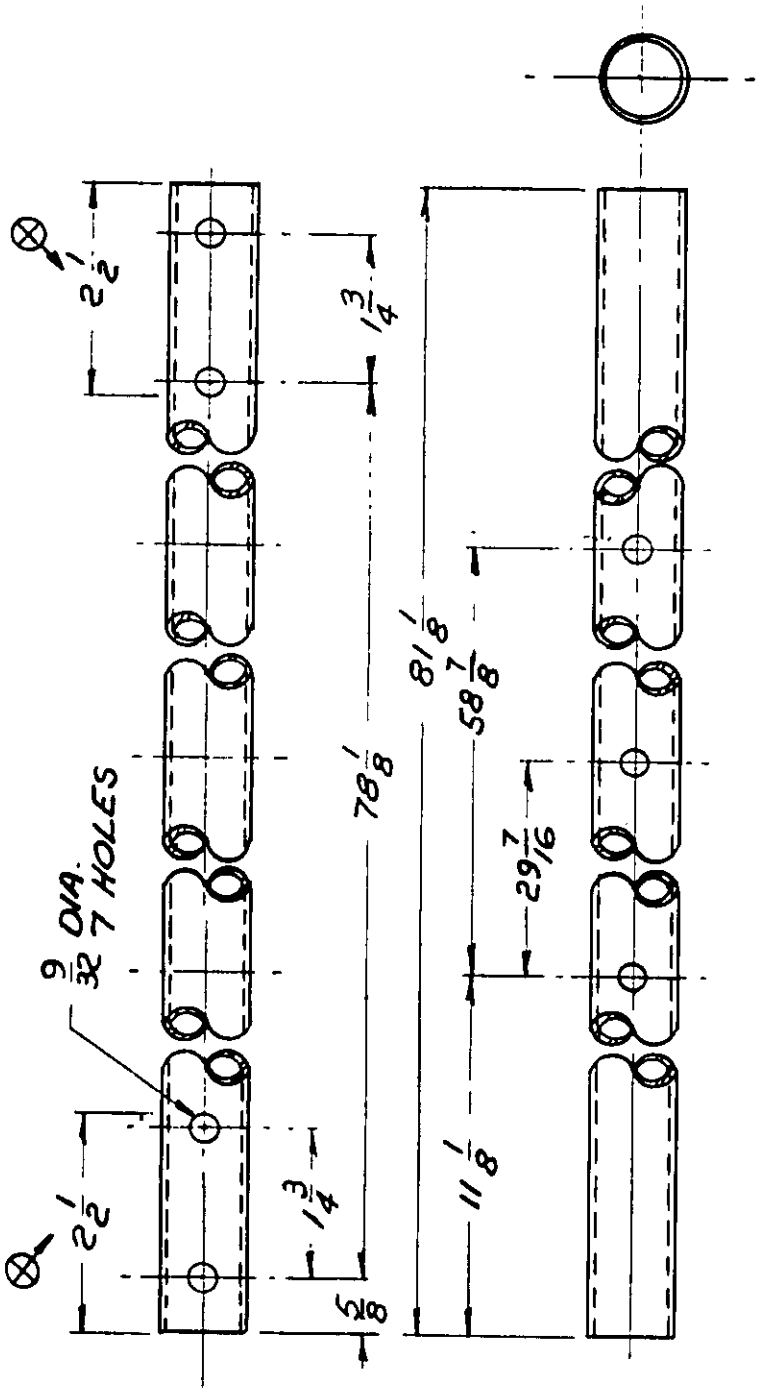

NOTE:
⊗ SEE NOTES I & II FIG. 37

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

FIGURE 46
TUBE, INTERMEDIATE

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

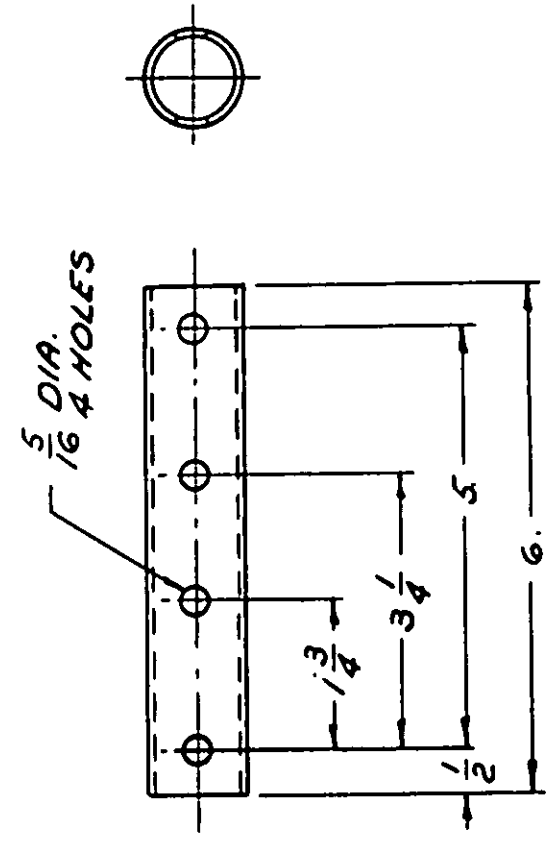


FIGURE 97
CONNECTOR, TUBE

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

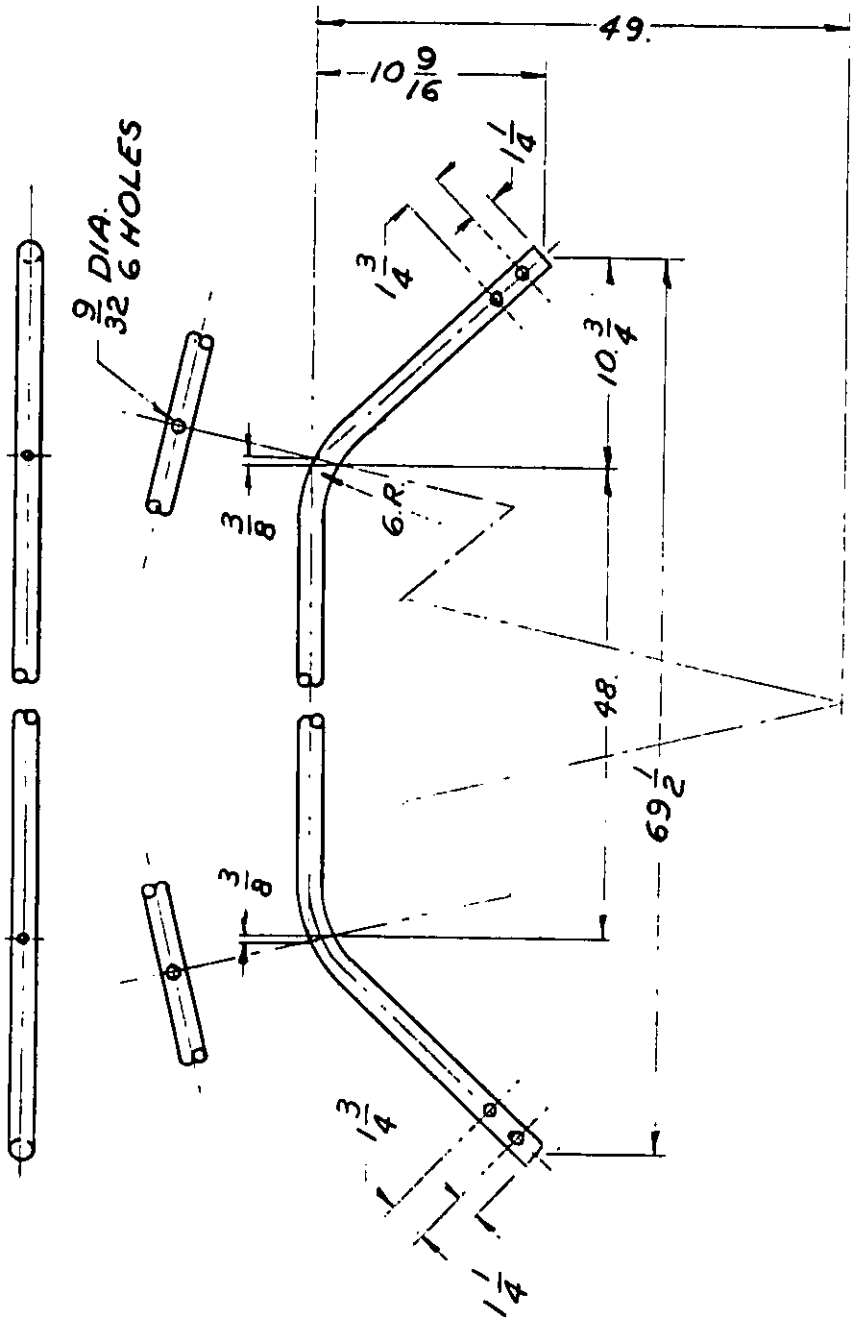


FIGURE 98
BOW, SUPPORT

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

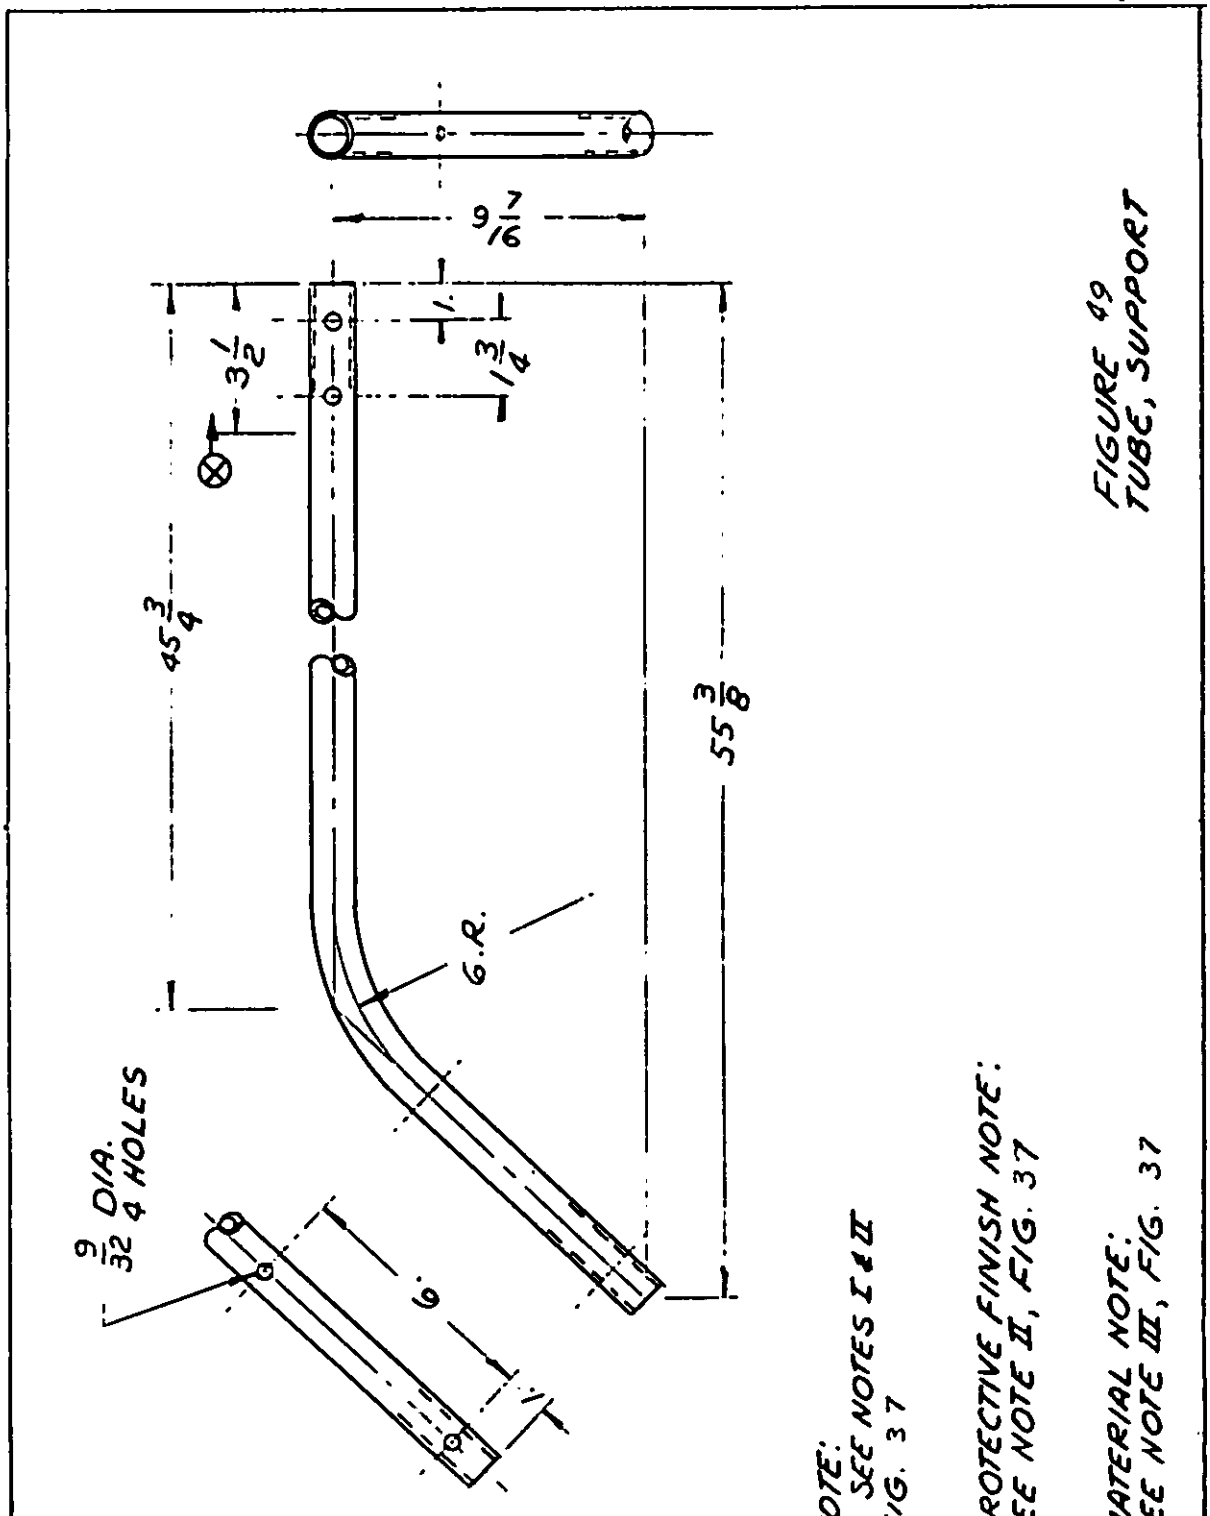


FIGURE 49
TUBE, SUPPORT

NOTE:
⊗ SEE NOTES I & II
FIG. 37

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

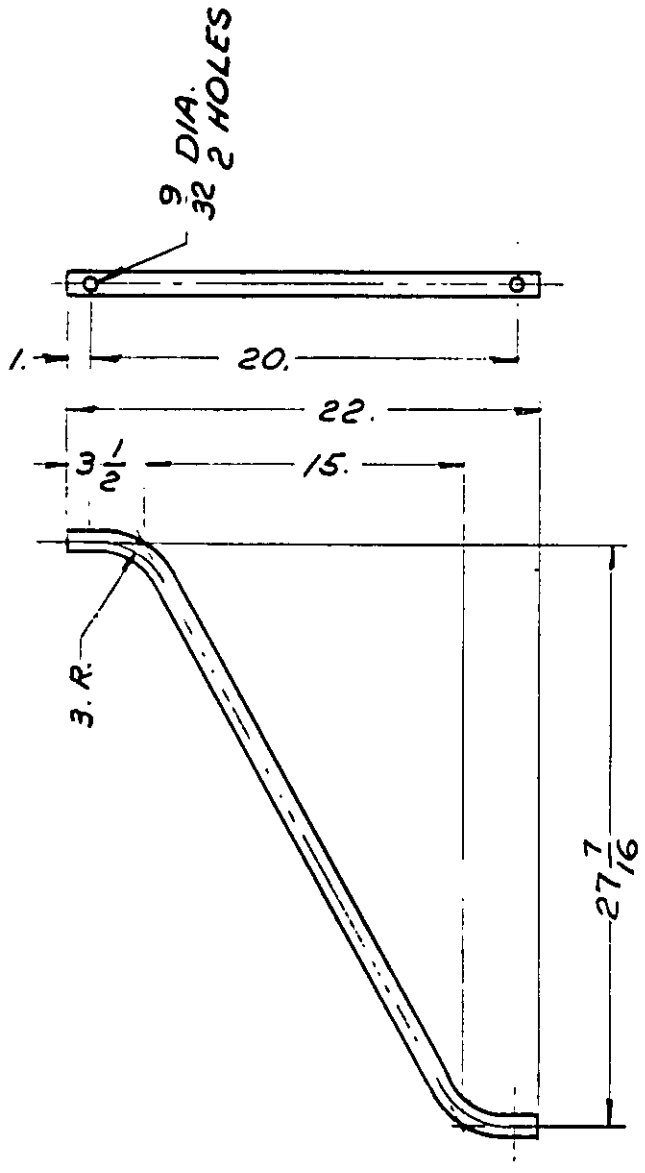


FIGURE 50
BRACE

PROTECTIVE FINISH NOTE:
SEE NOTE II, FIG. 37

MATERIAL NOTE:
SEE NOTE III, FIG. 37

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST · CORNER PLATE ASSEMBLY

ITEM NO.	FIG. NO.	PART NAME	REQ'D.
1	53	PLATE, CORNER	1
2	54	TUBE, CONNECTOR	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL-CARBON FS1010 THRU FS1025
SPEC. QQ-S-633

II STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, OR IV CONDITION HR, W, CD
SPEC. QQ-S-00825
1 1/4 O.D. x .109 WALL THICKNESS

WELDING NOTE - STEEL:

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 51

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

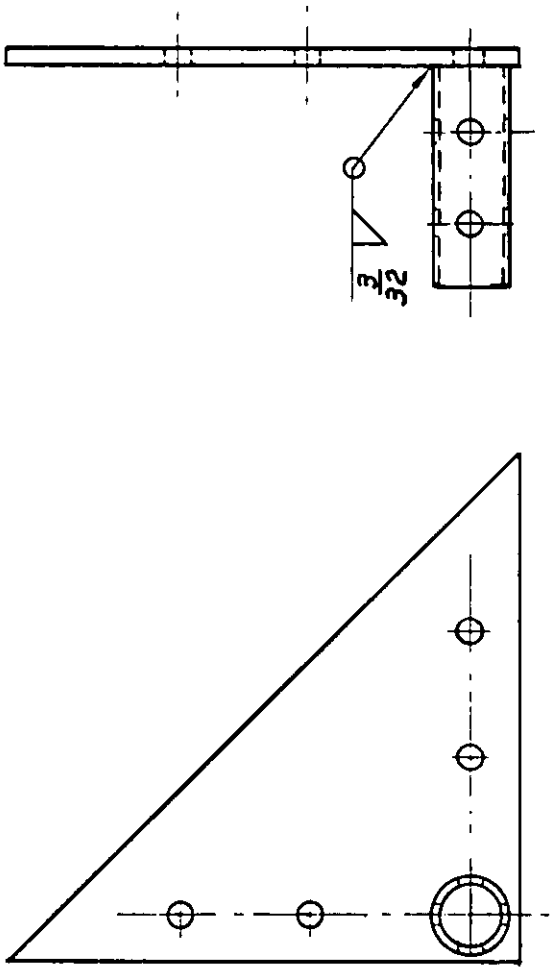


FIGURE 52
CORNER PLATE ASSEMBLY

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 51

WELDING NOTE:
SEE NOTE I, FIG 51

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

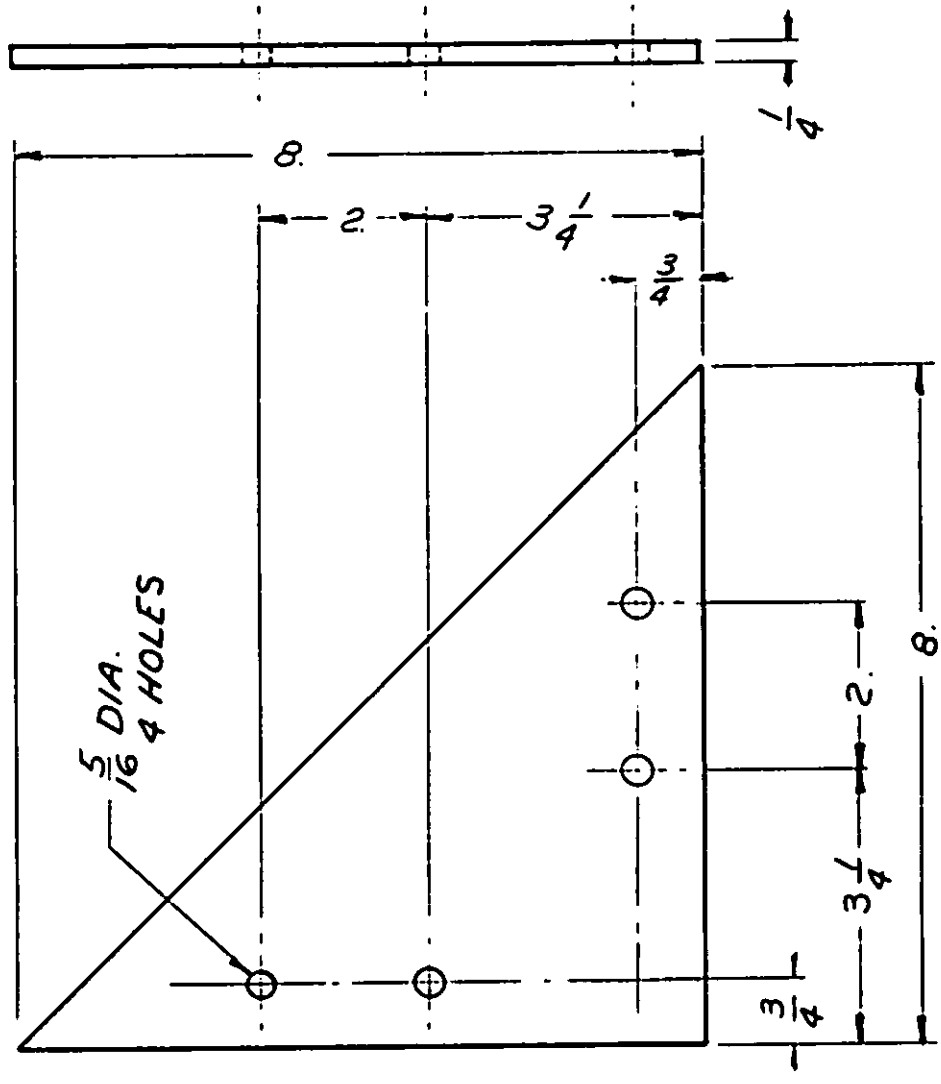


FIGURE 53
PLATE, CORNER

MATERIAL NOTE:
SEE NOTE 1, FIG. 51

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

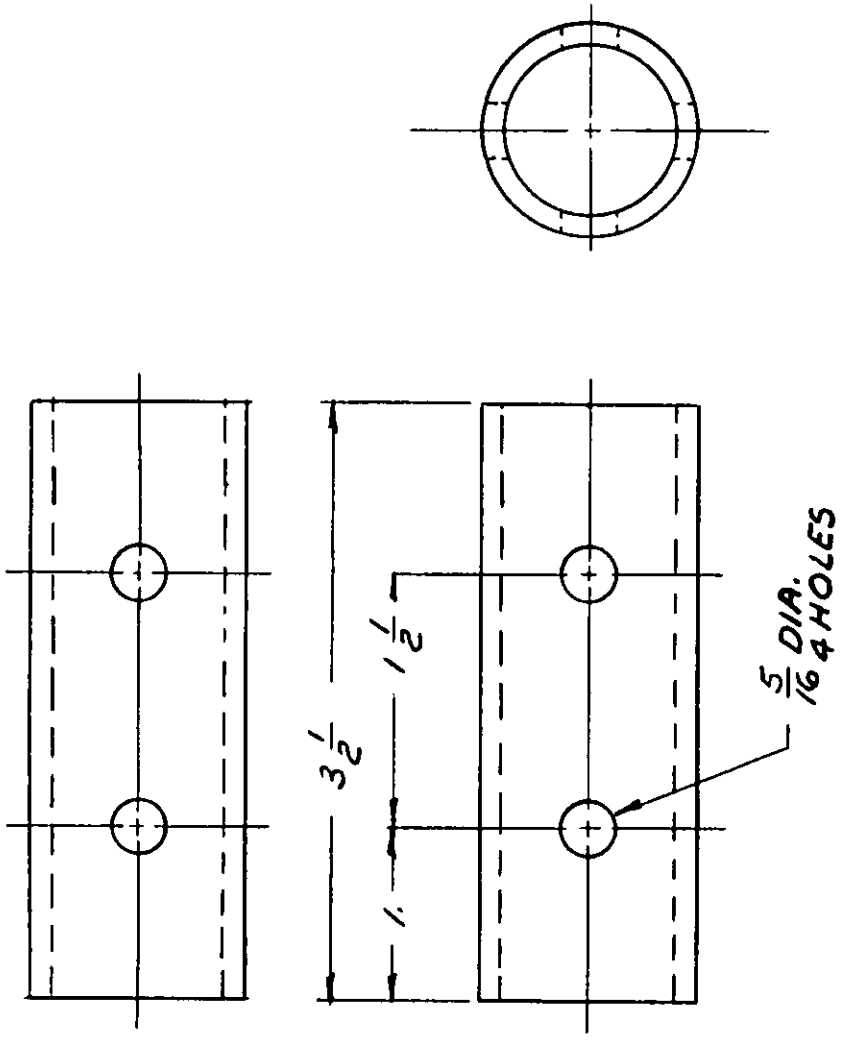


FIGURE 54
TUBE, CONNECTOR

MATERIAL NOTE:
SEE NOTE II, FIG 51

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST- SIDE TUBE ASSEMBLY

ITEM NO.	FIG NO	PART NAME	REQ'D.
1	57	TUBE, SIDE	1
2	58	BRACKET, TUBE END	1
3	59	PLATE, BOTTOM	1

SPECIFICATIONS

MATERIAL NOTE:

I STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, OR IV CONDITION HR, W, CDSR
SPEC. QQ-T-00825
1. O.D. x .065 WALL THICKNESS

II STEEL CARBON FS1010 THRU FS1025
SPEC. MIL-S-46049
1/8 THICK

WELDING NOTE - STEEL:

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE

I BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 55A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

NOTE:

I DISTANCE MARKED ⊗ TO BE FREE OF PAINT.

II UNPAINTED TUBE ENDS TO BE COATED WITH MIL-C-16173 CORROSION PREVENTIVE OR MIL-C-490, TYPE I, PHOSPHATE PROTECTIVE COATING

FIGURE 55 B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

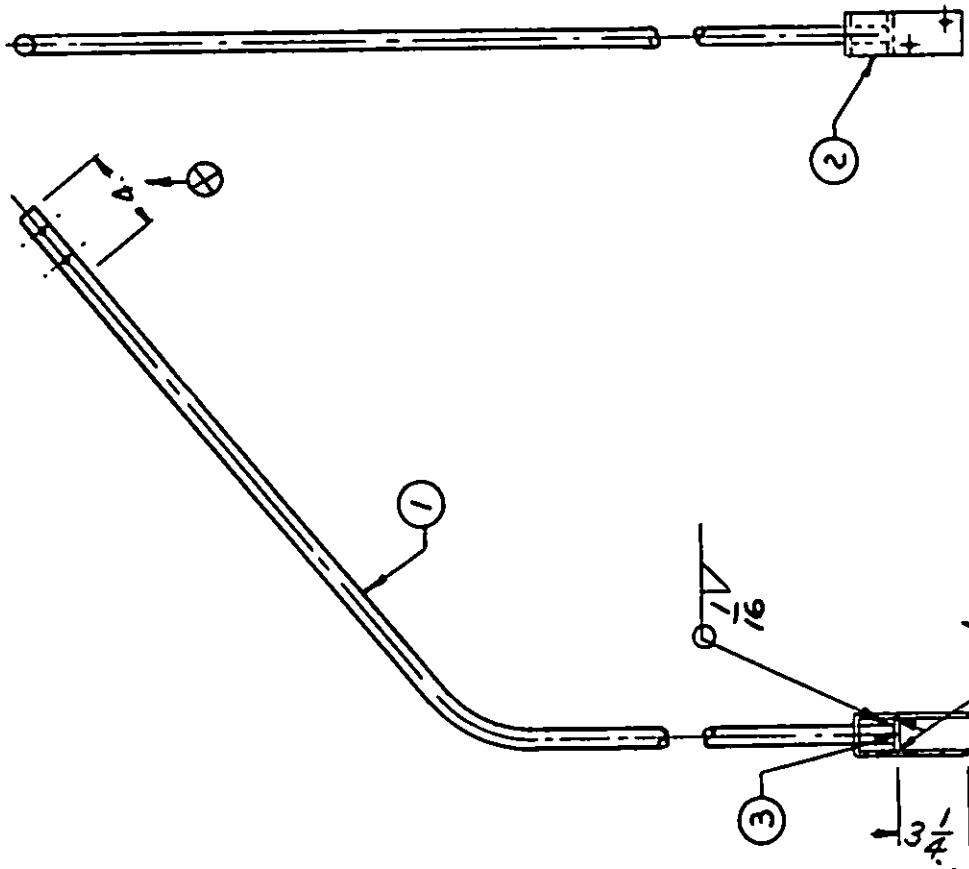


FIGURE 56
SIDE TUBE ASSEMBLY

NOTE:
⊗ SEE NOTES I & II, FIG. 56

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 55

WELDING NOTE:
SEE NOTE I, FIG. 55

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

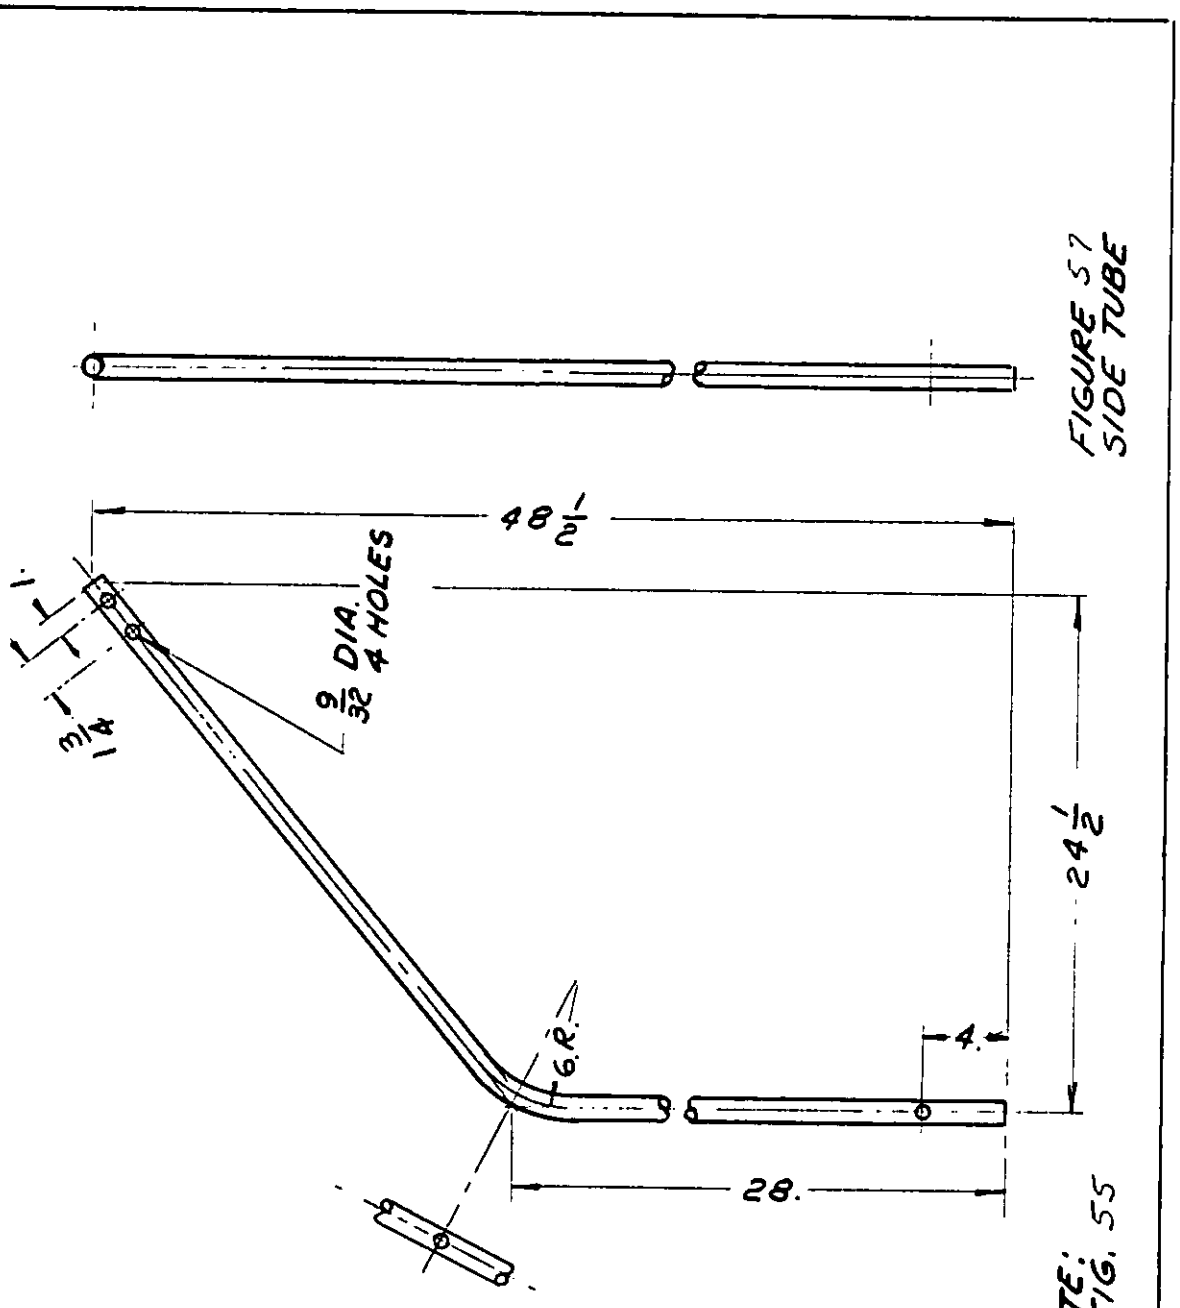


FIGURE 57
SIDE TUBE

MATERIAL NOTE:
SEE NOTE I, FIG. 55

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the currentversion before use.


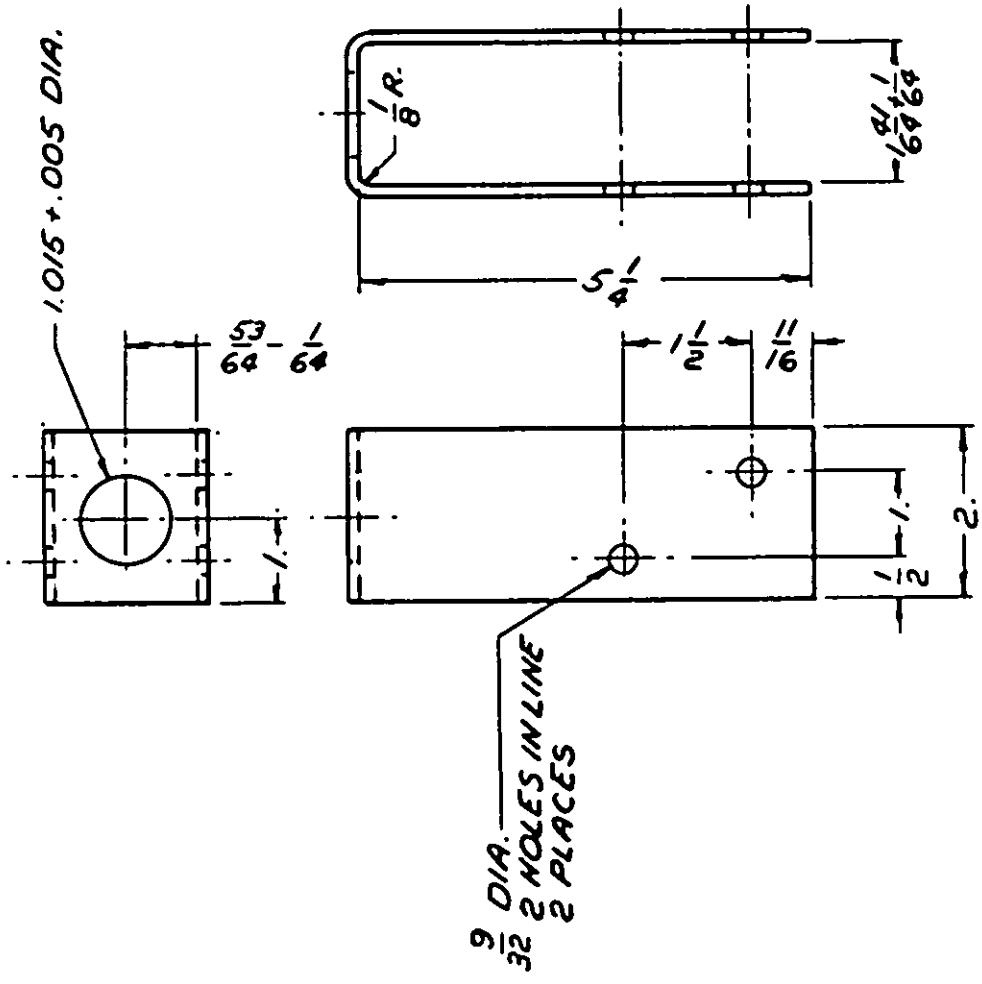


FIGURE 58
BRACKET, TUBE END

MATERIAL NOTE:
SEE NOTE II, FIG. 55

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

FIGURE 59
PLATE, BOTTOM

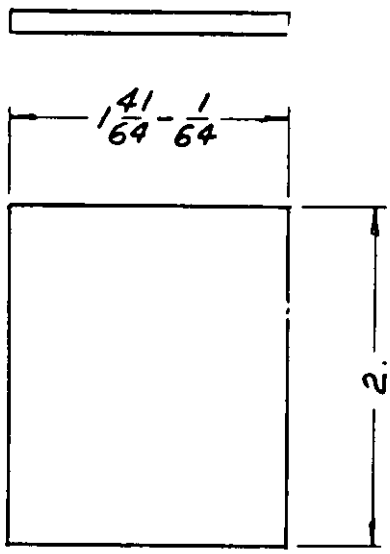

MATERIAL NOTE:
SEE NOTE II, FIG. 55

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST SIDE TUBE ASSEMBLY

ITEM NO	FIG. NO	PART NAME	REQ'D.
1	62	TUBE, SIDE	1
2	58	BRACKET, TUBE END	1
3	59	PLATE BOTTOM	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, OR IV CONDITION HR, W, CDSR
SPEC. QQ-T-00825
1.00. x .065 WALL THICKNESS

WELDING NOTE - STEEL

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC. TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

NOTE:

I DISTANCE MARKED ⊗ TO BE FREE OF PAINT

II UNPAINTED TUBE ENDS TO BE COATED
WITH MIL-C-16173 CORROSION PREVENTIVE
OR TT-C-490, TYPE I,
PHOSPHATE PROTECTIVE COATING

FIGURE 60

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

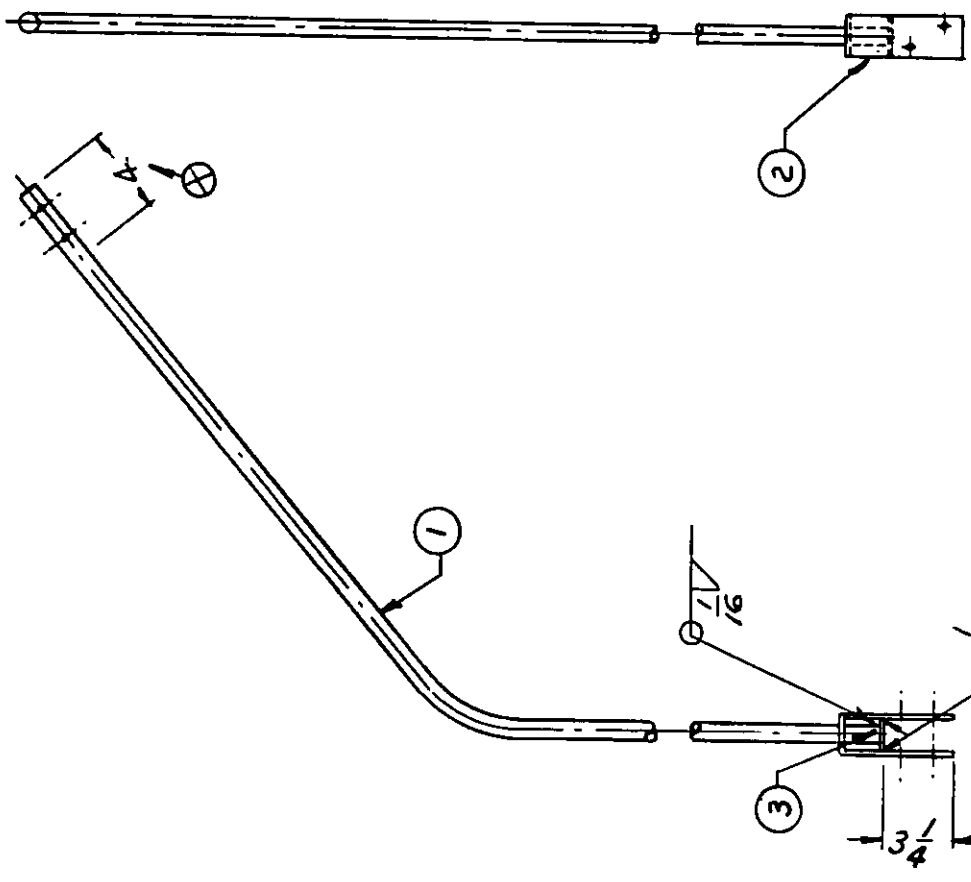


FIGURE 61
SIDE TUBE ASSEMBLY

NOTE:
⊗ SEE NOTE I & II
FIG 60

PROTECTIVE
FINISH NOTE:
SEE NOTE I, FIG. 60

WELDING NOTE:
SEE NOTE I, FIG. 60

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

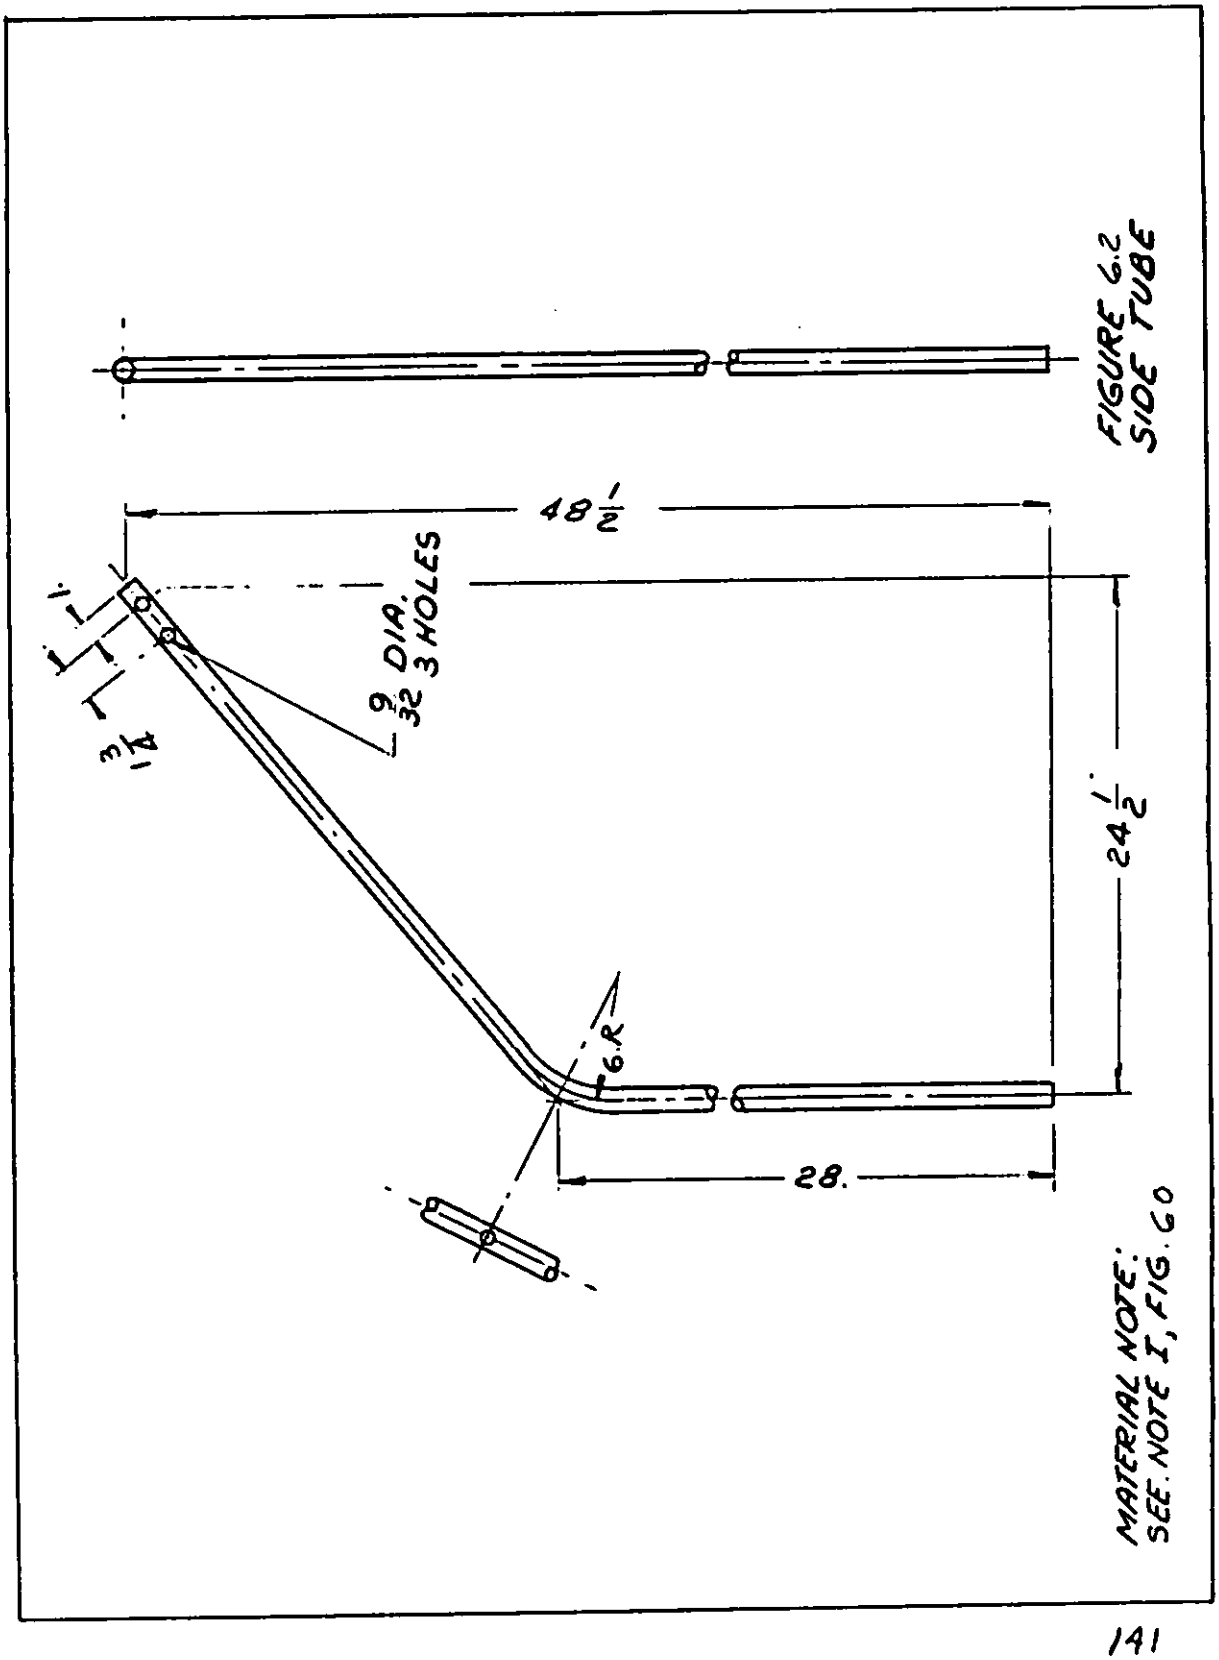


FIGURE 6.2
SIDE TUBE

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - SIDE TUBE ASSEMBLY

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	65	TUBE, SIDE	1
2	58	BRACKET, TUBE END	1
3	59	PLATE, BOTTOM	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL CARBON TUBING
COMPOSITION FS1000
TYPE I, III, OR IV CONDITION HR, W, COSR
SPEC. QQ-T-00825
1. O.D. x .065 WALL THICKNESS

WELDING NOTE:

I WELD IN ACCORDANCE
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE

I BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

NOTE,

I DISTANCE MARKED ⊗ TO BE FREE OF PAINT

II UNPAINTED TUBE ENDS TO BE COATED WITH
MIL-C-16173 CORROSION PREVENTIVE OR
TT-C-490, TYPE I, PHOSPHATE
PROTECTIVE COATING

FIGURE 63

Source: https://assist.dla.mil -- Downloaded: 202640-22T02:31Z
Check the source to verify that this is the current version before use.

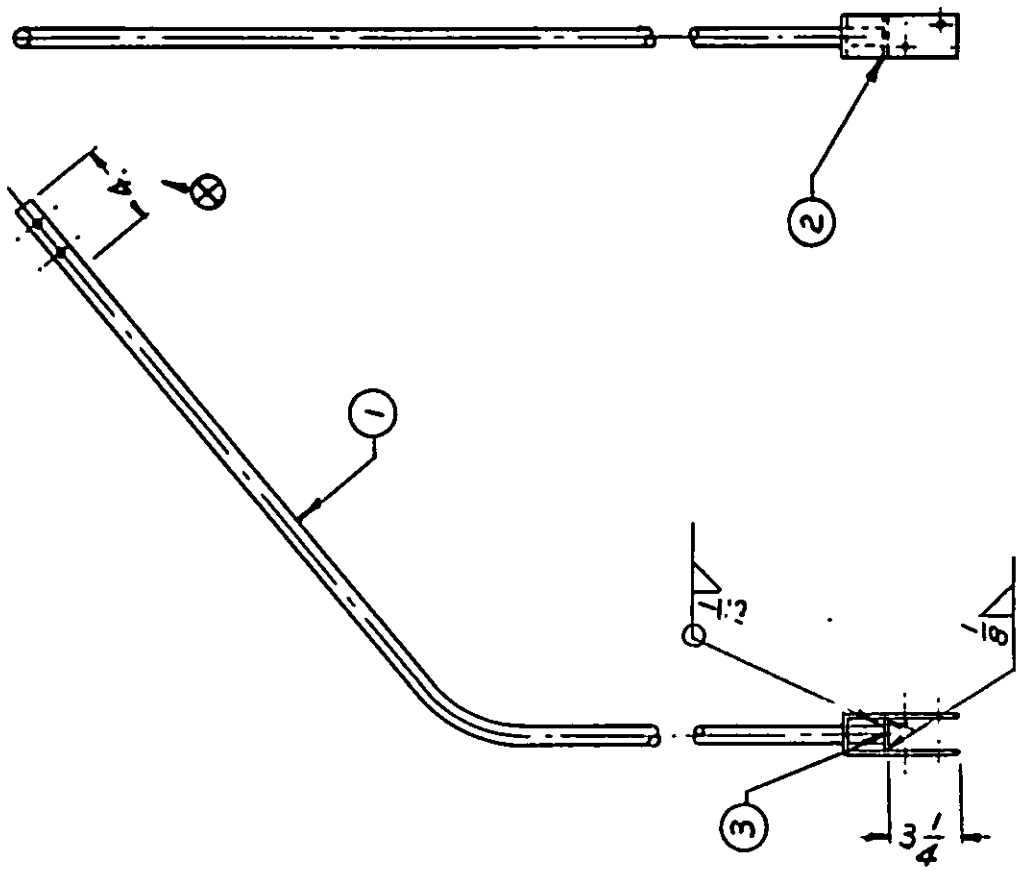


FIGURE 6.4
SIDE TUBE ASSEMBLY

NOTE:
⊗ SEE NOTE I & II, FIG. 6.3

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 6.3

WELDING NOTE:
SEE NOTE I, FIG 6.3

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the currentversion before use.

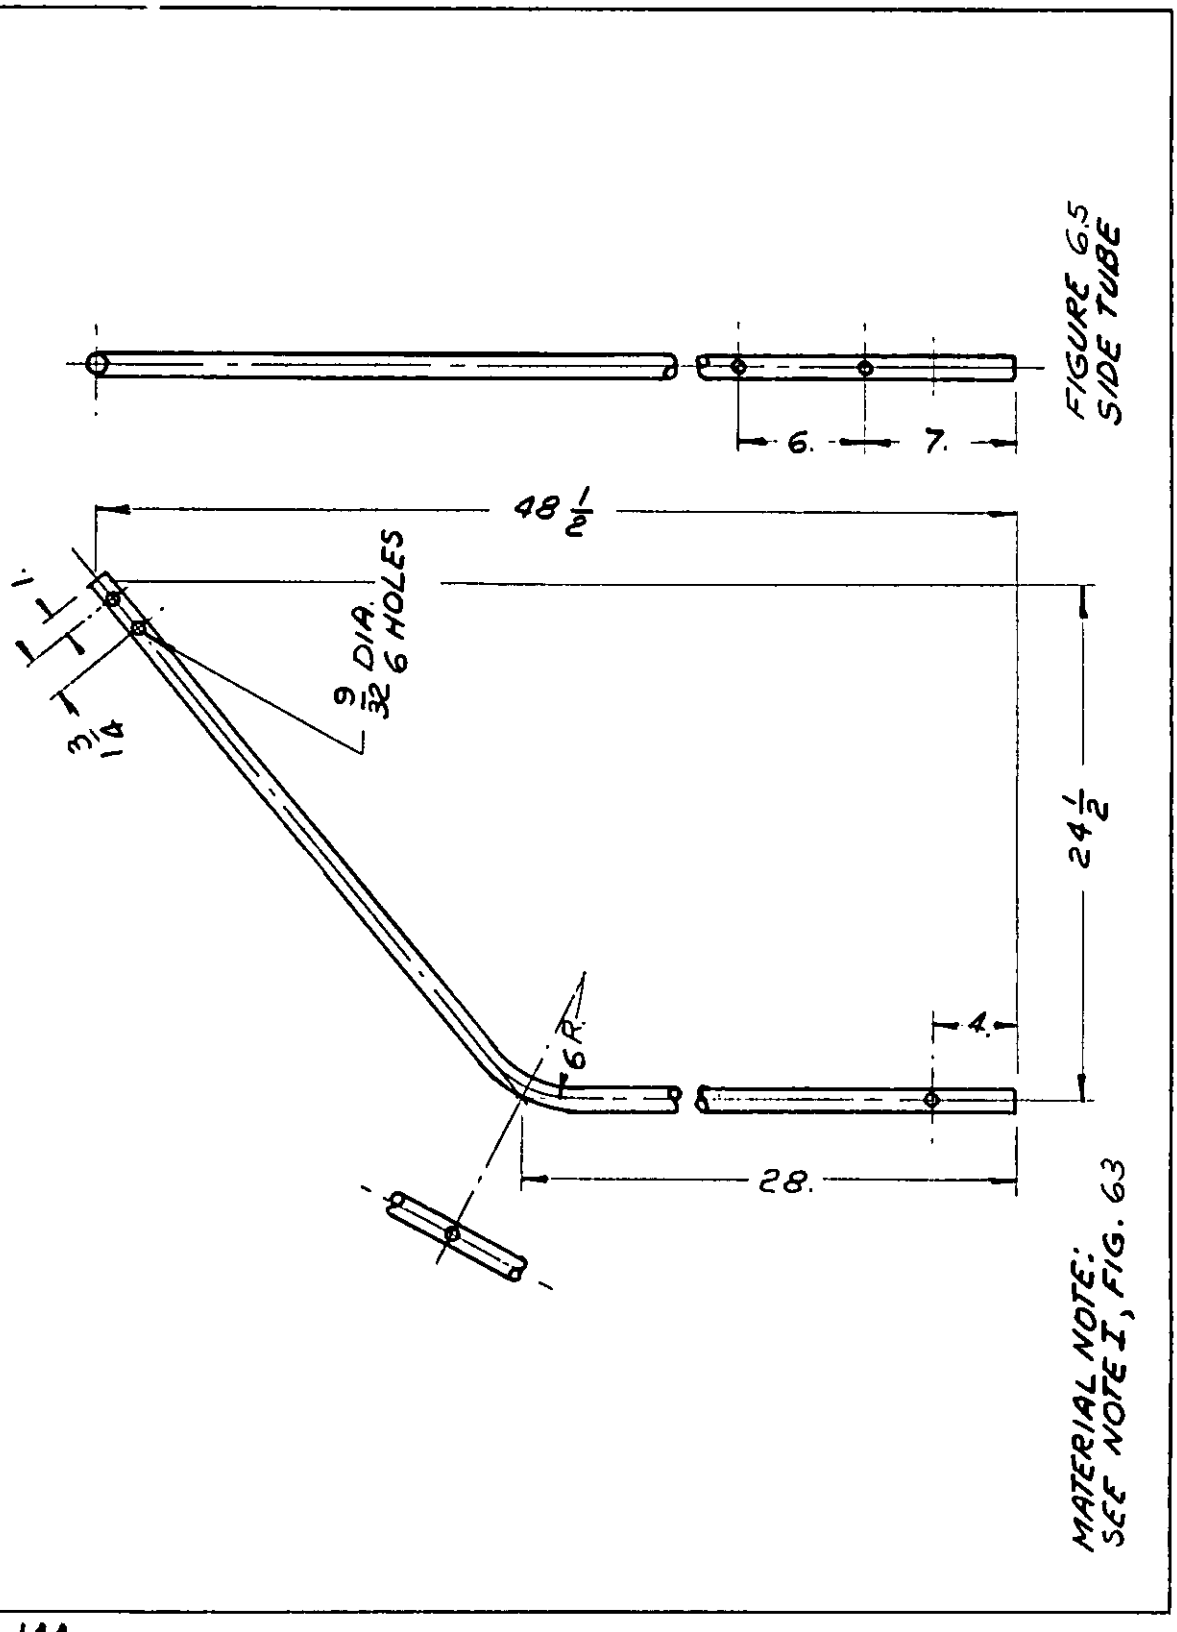


FIGURE 6.5
SIDE TUBE

MATERIAL NOTE:
SEE NOTE I, FIG. 63

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - SIDE TUBE ASSEMBLY

ITEM NO	FIG. NO.	PART NAME	REQ'D.
1	68	TUBE, SIDE	1
2	58	BRACKET, TUBE END	1
3	59	PLATE BOTTOM	1

SPECIFICATIONS:

MATERIAL NOTE:

I STEEL CARBON TUBING
COMPOSITION FS 1000
TYPE I, III, OR IV CONDITION HR, W, CDSR
SPEC. QQ-T-00825
1. O.D. x .065 WALL THICKNESS

WELDING NOTE - STEEL:

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE

I BASE PHOSPHATE
IN ACCORDANCE WITH TYPE I
SPEC. TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

NOTE:

I DISTANCE MARKED ⊗ TO BE FREE OF PAINT

II UNPAINTED TUBE ENDS TO BE COATED
WITH MIL-C-16173 CORROSION
PREVENTIVE OR TT-C-490, TYPE I,
PHOSPHATE PROTECTIVE COATING

FIGURE 66

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

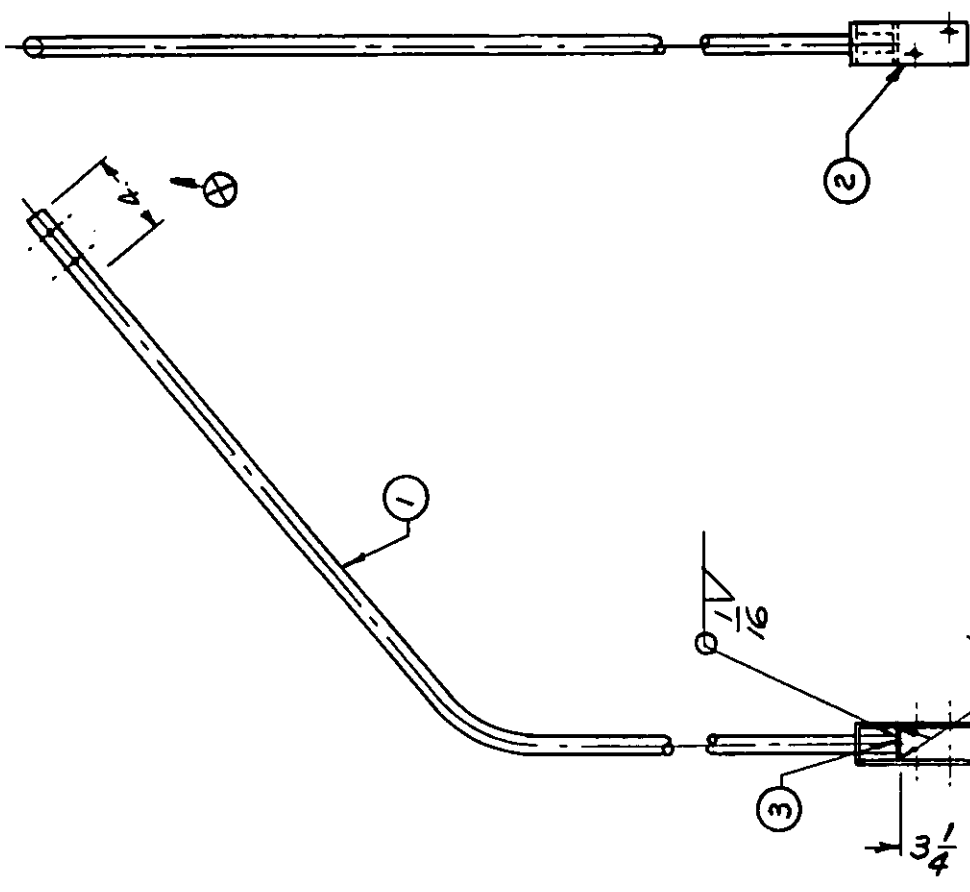



FIGURE 67
SIDE TUBE ASSEMBLY

NOTE
⊗ SEE NOTES I & II, FIG 66

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG. 66

WELDING NOTE:
SEE NOTE I, FIG. 66

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

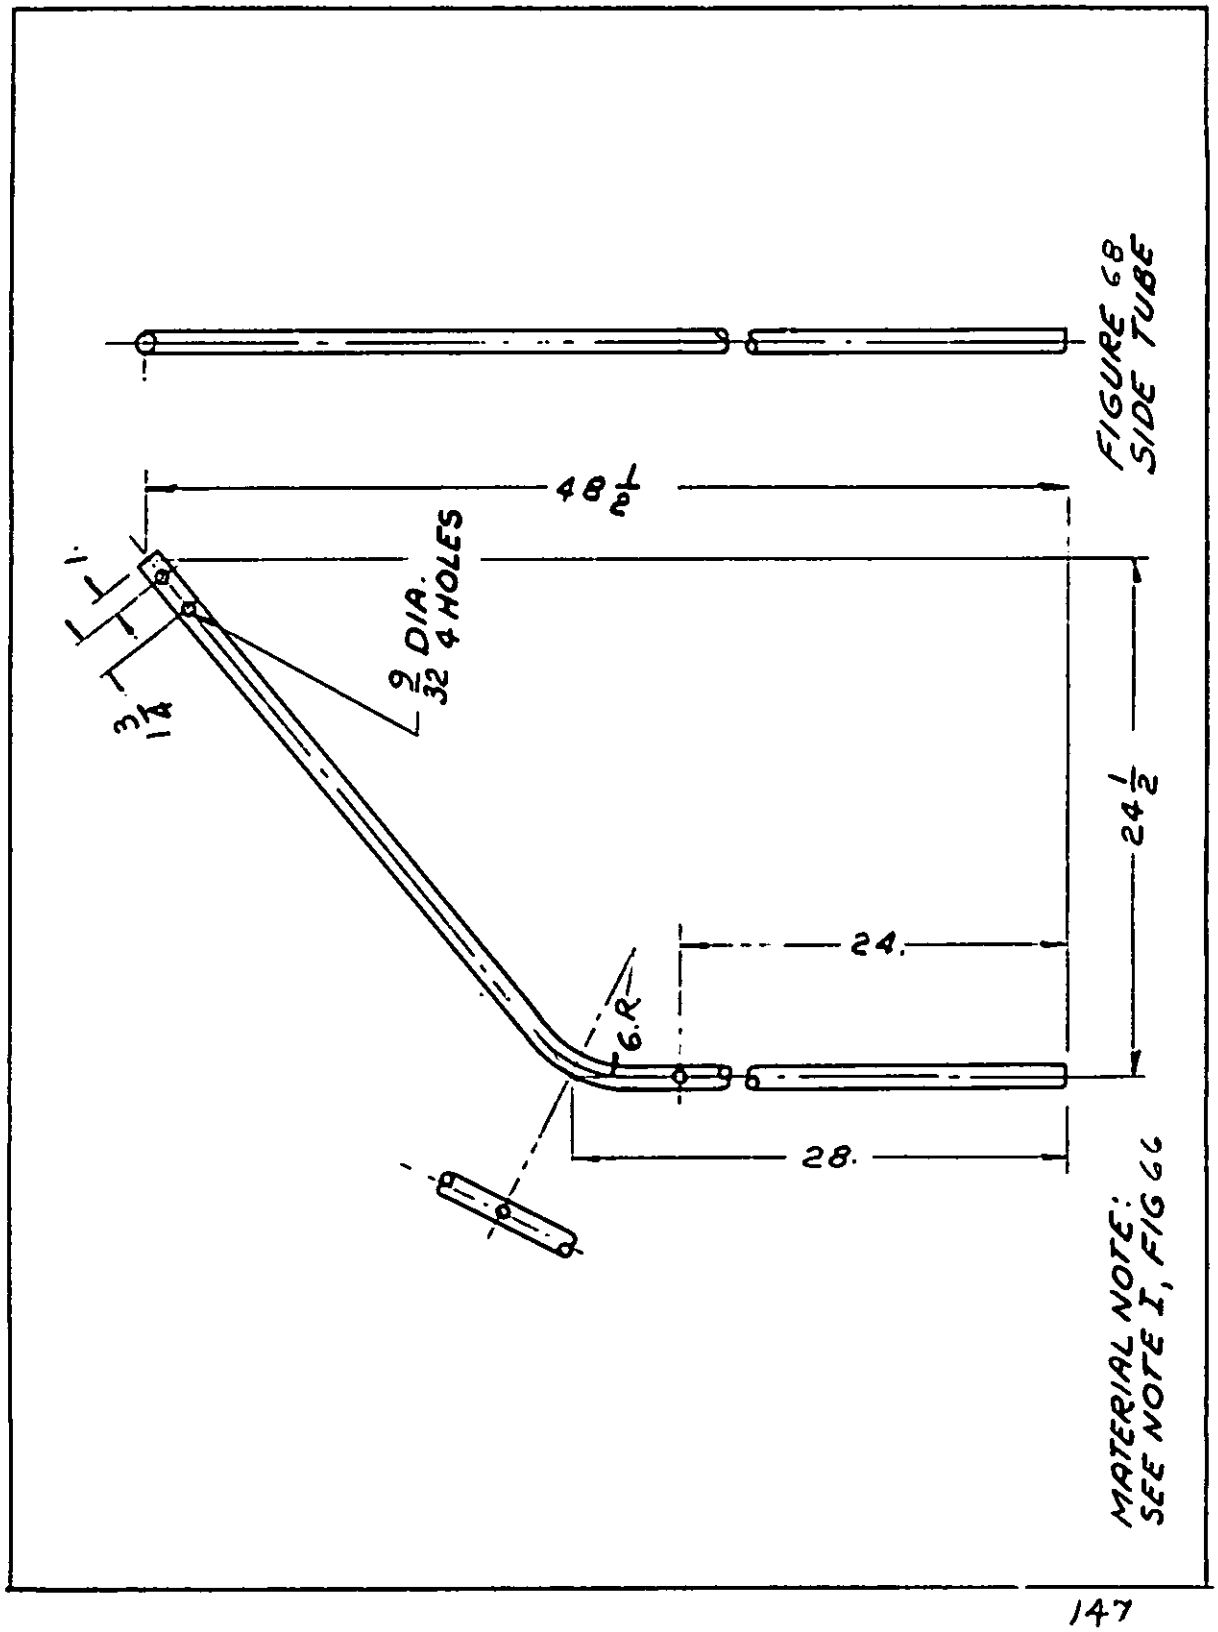

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - INSTALLATION WATERSHED COVER

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	79	COVER ASSEMBLY	1
2	74	CLAMP	32
3	75	ROD, HOLD DOWN	4
4	76	ROD, HOLD DOWN	2
5	77	ROD, HOLD DOWN	4

ITEM NO	REQ'D	PART NAME	SIZE	ORDNANCE PART NO.
6	1	CORD, ELASTIC SHOCK ABSORBER MIL-C-565	3/8 DIA. x 24 FT. LG	
7	64	SCREW, WOOD, FLAT HD.	#8 x 1 1/2 LG.	129544

SPECIFICATIONS:

MATERIAL NOTE:

I ALUMINUM ALLOY (6IS)
TEMPER T6
SPEC. QQ-A-225

FIGURE 69

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

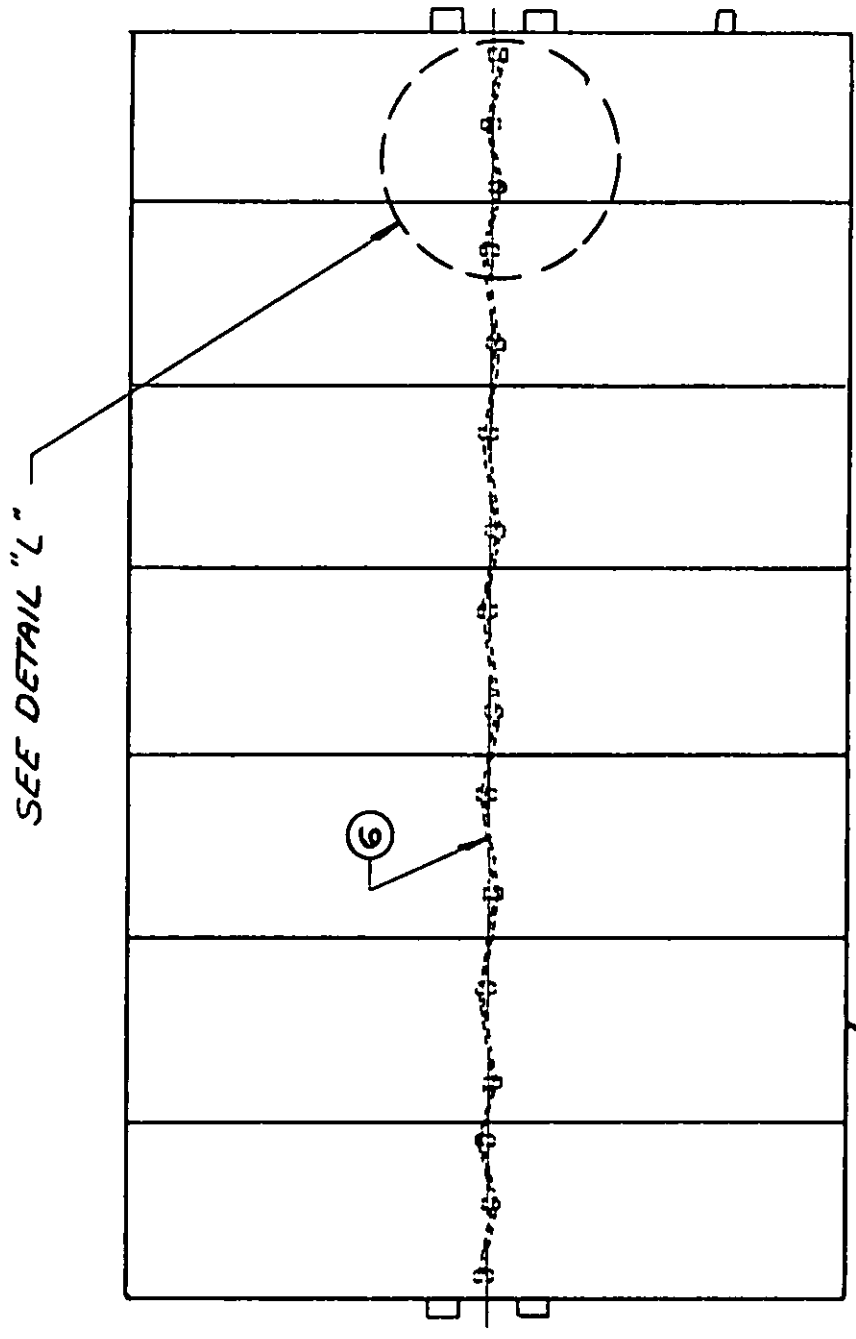


FIGURE 70A
INSTALLATION WATERSHED
COVER - PLAN VIEW

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


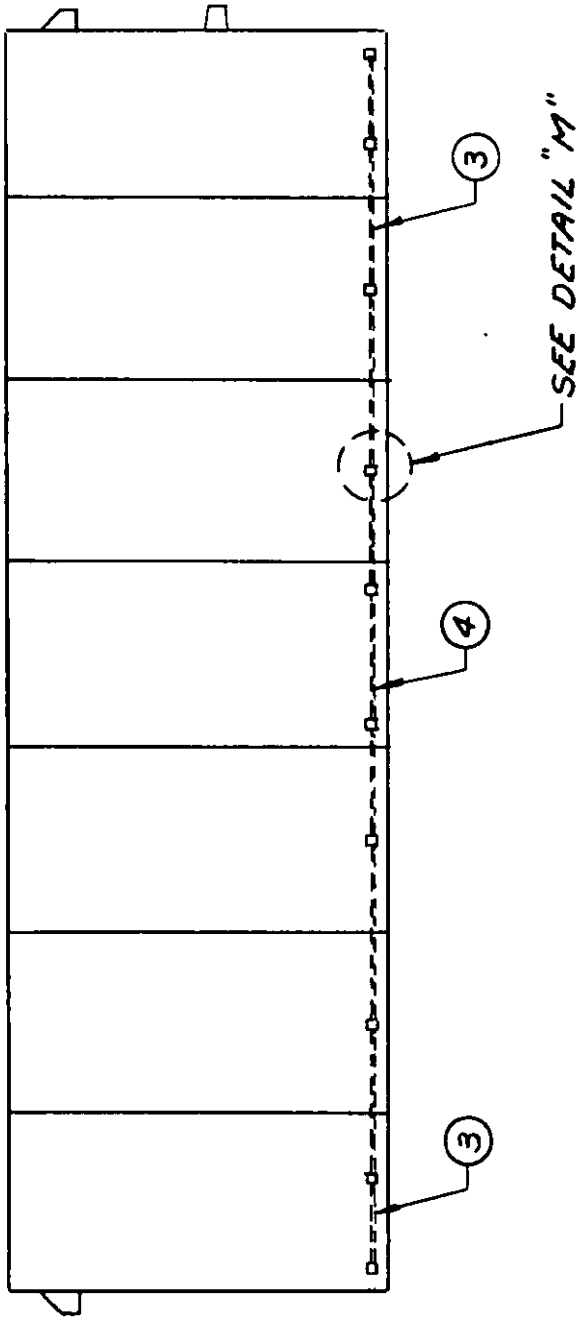


FIGURE 708
INSTALLATION WATERSHED
COVER - LEFT & RIGHT ELEVATION

FOR DETAIL "M"
SEE FIG. 72


Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

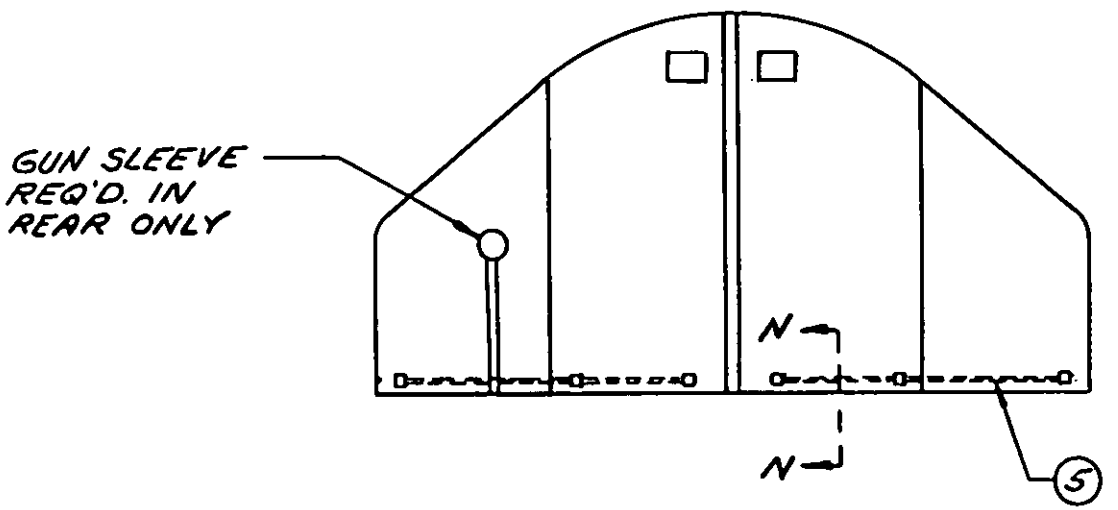

FOR SECTION N-N
SEE FIG. 73

FIGURE 70C
INSTALLATION WATERSHED COVER
FRONT & REAR ELEVATION


Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

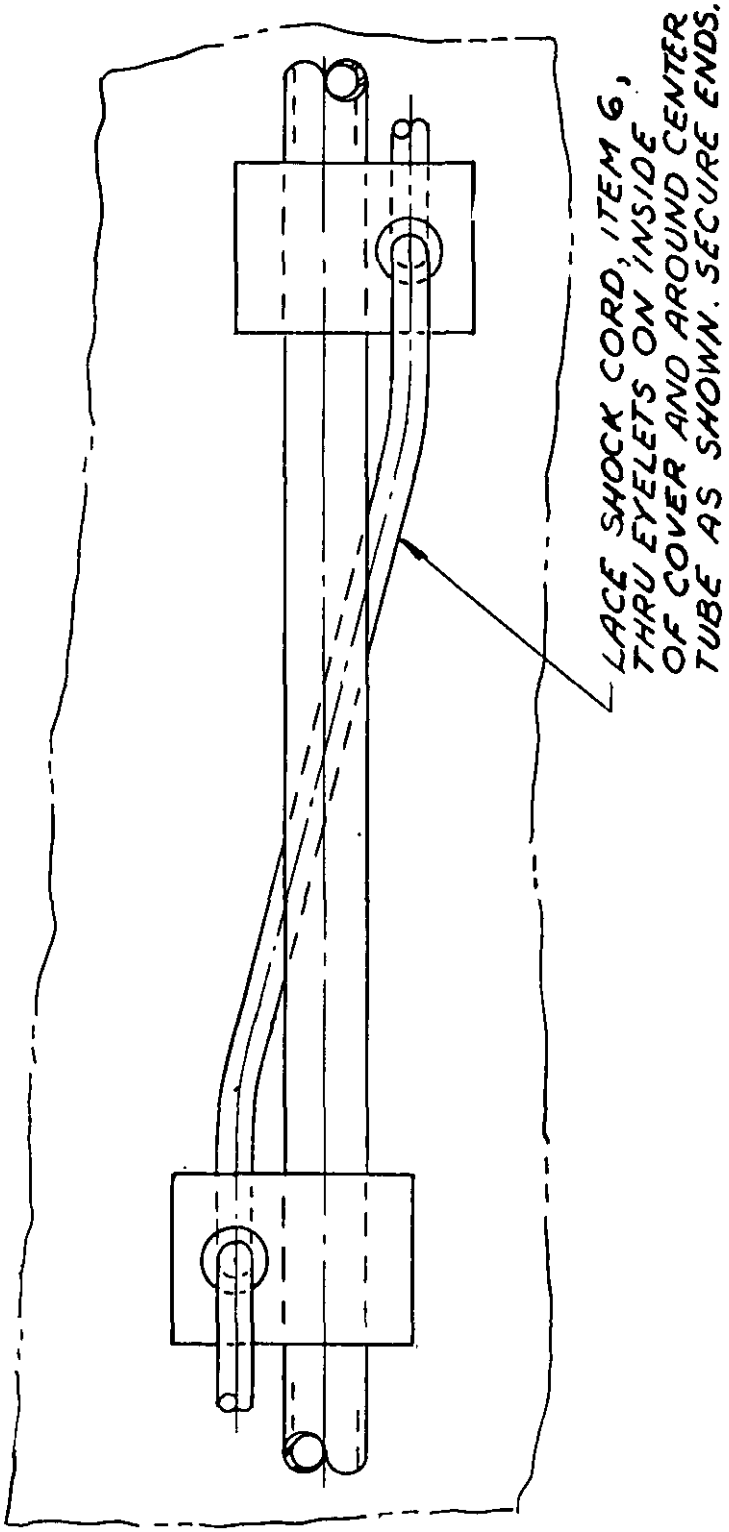

DETAIL "L"

FIGURE 71


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

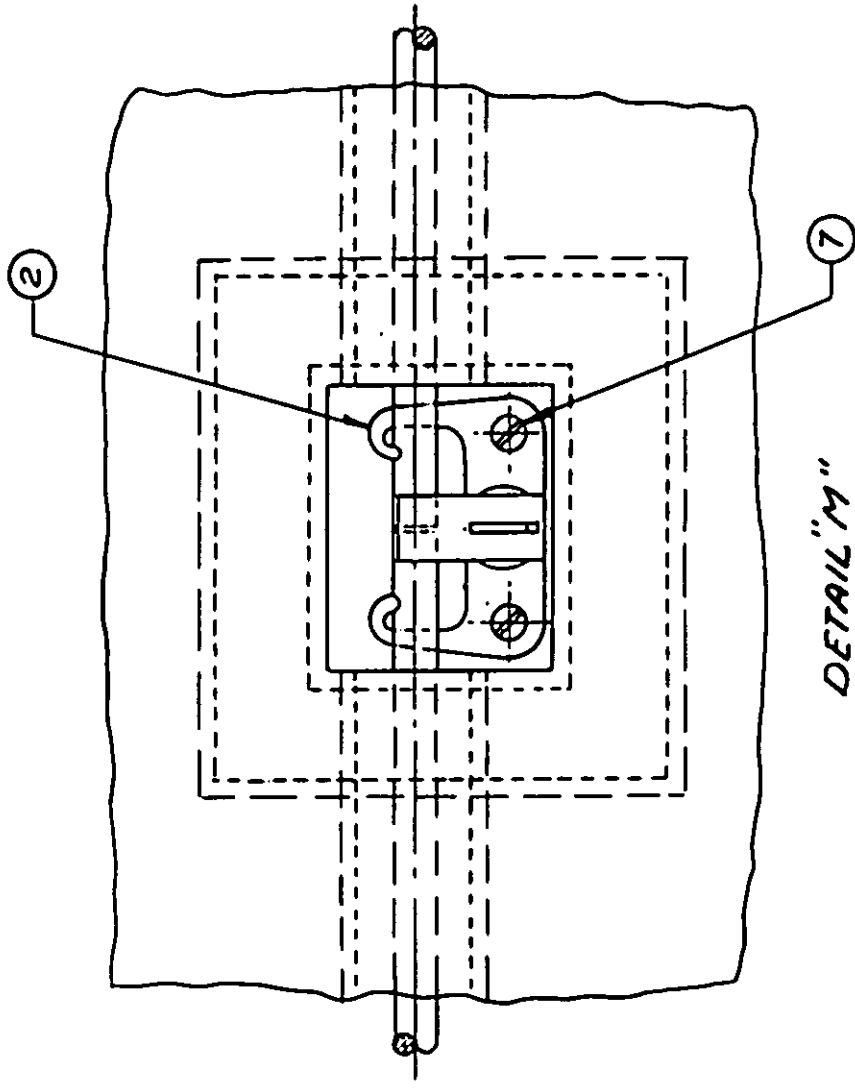

DETAIL "M"
TYP 32 PLACES

FIGURE 72


Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

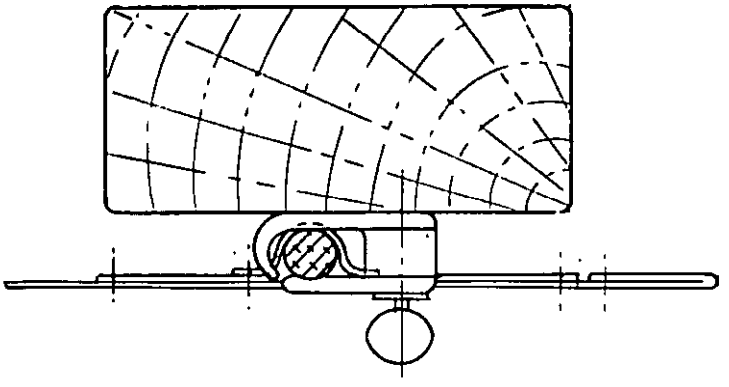

SECTION N-N
TYP 32 PLACES

FIGURE 73

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

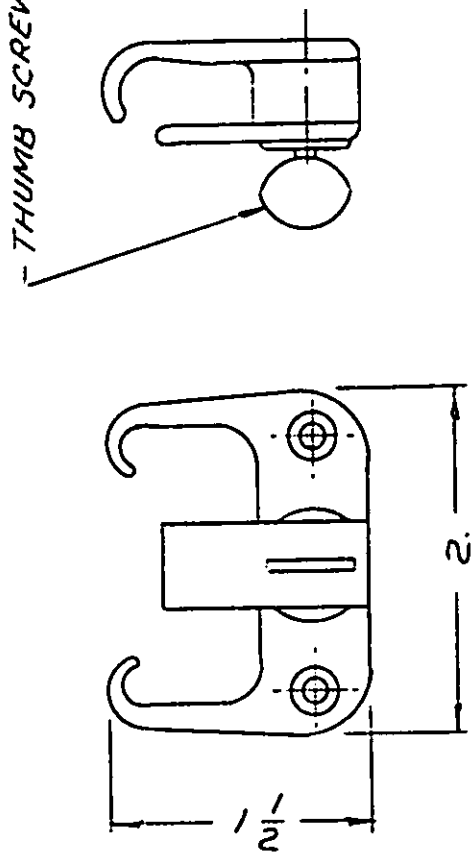

THUMB SCREW CLAMP
FOR 3/8 DIA. ROD

FIGURE 74

APPROVED SOURCE
THE GEO. WORTHINGTON CO.
THEIR NO. 11

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

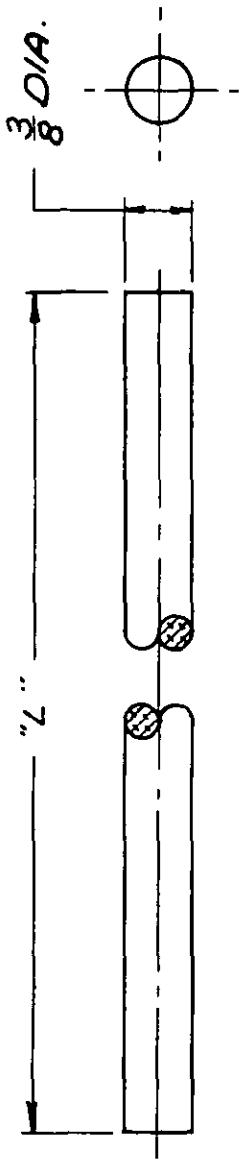


FIGURE NUMBER	REQ'D.	"L"
FIGURE 75	4	83
FIGURE 76	2	69
FIGURE 77	4	60

HOLD DOWN ROD

MATERIAL NOTE:
SEE NOTE I, FIG. 69

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - COVER ASSEMBLY, WATERSHED

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	89	SECTION OF COVER - TOP & SIDES	2
2	90	SECTION OF COVER - TOP & SIDES	4
3	91	SECTION OF COVER - TOP & SIDE	1
4	92	SECTION OF COVER - END	2
5	93	SECTION OF COVER - END	2
6	94	SECTION OF COVER - END	3
7	95	SECTION OF COVER - END	1
8	98	REINFORCEMENT	32
9	99	WEBBING	16
10	100	STRIP	4
11	101	STRIP	4
12	102	STRIP	4
13	103	STRIP	4
14	104	STRIP	2
15	105	STRIP	3
16	106	STRIP	4
17	107	STRIP	1
18	108	STRIP	1
19	109	ZIPPER FLAP	2
20	110	ZIPPER FLAP	1
21	111	GUN TUBE SLEEVE	1
22	113	VENTILATOR COVER	4
23	117	VENTILATOR FRAME	4

FIGURE 78A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

STANDARD HARDWARE

ITEM NO	REQD	PART NAME	SPEC. OR. ORD. PN
24	2	ZIPPER-INTERLOCKING, NON-SEPARATING HEAVY DUTY (SINGLE ACTION, OPEN TOP, CLOSED BOTTOM WITH NON-LOCK DOUBLE PULL REVERSIBLE SLIDER) 64. LONG	V-F-106 CLASS B SIZE H
25	1	ZIPPER-INTERLOCKING, SEPARATING, HEAVY DUTY (REGULAR, LEFT HAND WITH LOCKING SINGLE PULL NON REVERSIBLE SLIDER) 20. LONG.	V-F-106 CLASS B SIZE H
26	1	STRAP, WEBBING WITH BUCKLE AND END CLIP 5/8 WIDE x 20. LONG	501285
27	16	GROMMET BRASS SPUR #2	

FIGURE 78B

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS:

MATERIAL NOTE:
CLOTH, COATED, TYPE II, CLASS 3
SPEC MIL-C-20696
WAIVE PARA 3.5
COLOR GREEN SHADE, DESIGNATED
NO. FED. STD. 595

ALL SOURCES MUST SUPPLY AN ITEM EQUIVALENT TO THE MANUFACTURERS ITEM INDICATED. ORDNANCE CORP APPROVAL REQUIRED.

> DENOTES MATCH POINT. LIKE NUMBERS MATCH

THREAD, NYLON
TYPE II, CLASS I
SIZE F, COLOR O.D., SPEC V-T-295

NOTE:
STITCHING, TYPE 301 PER SPEC. FED-STD-751
8-10 STITCHES PER INCH. SMALLEST NEEDLE SIZE FEASIBLE SHOULD BE USED IN ORDER TO ASSURE WEATHER PROOF SEAMS

SEAM ALLOWANCE MAY VARY TO SUIT MANUFACTURER.

MANUFACTURER SHALL BE RESPONSIBLE FOR FINAL FIT OF COVER

FIGURE 78C

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

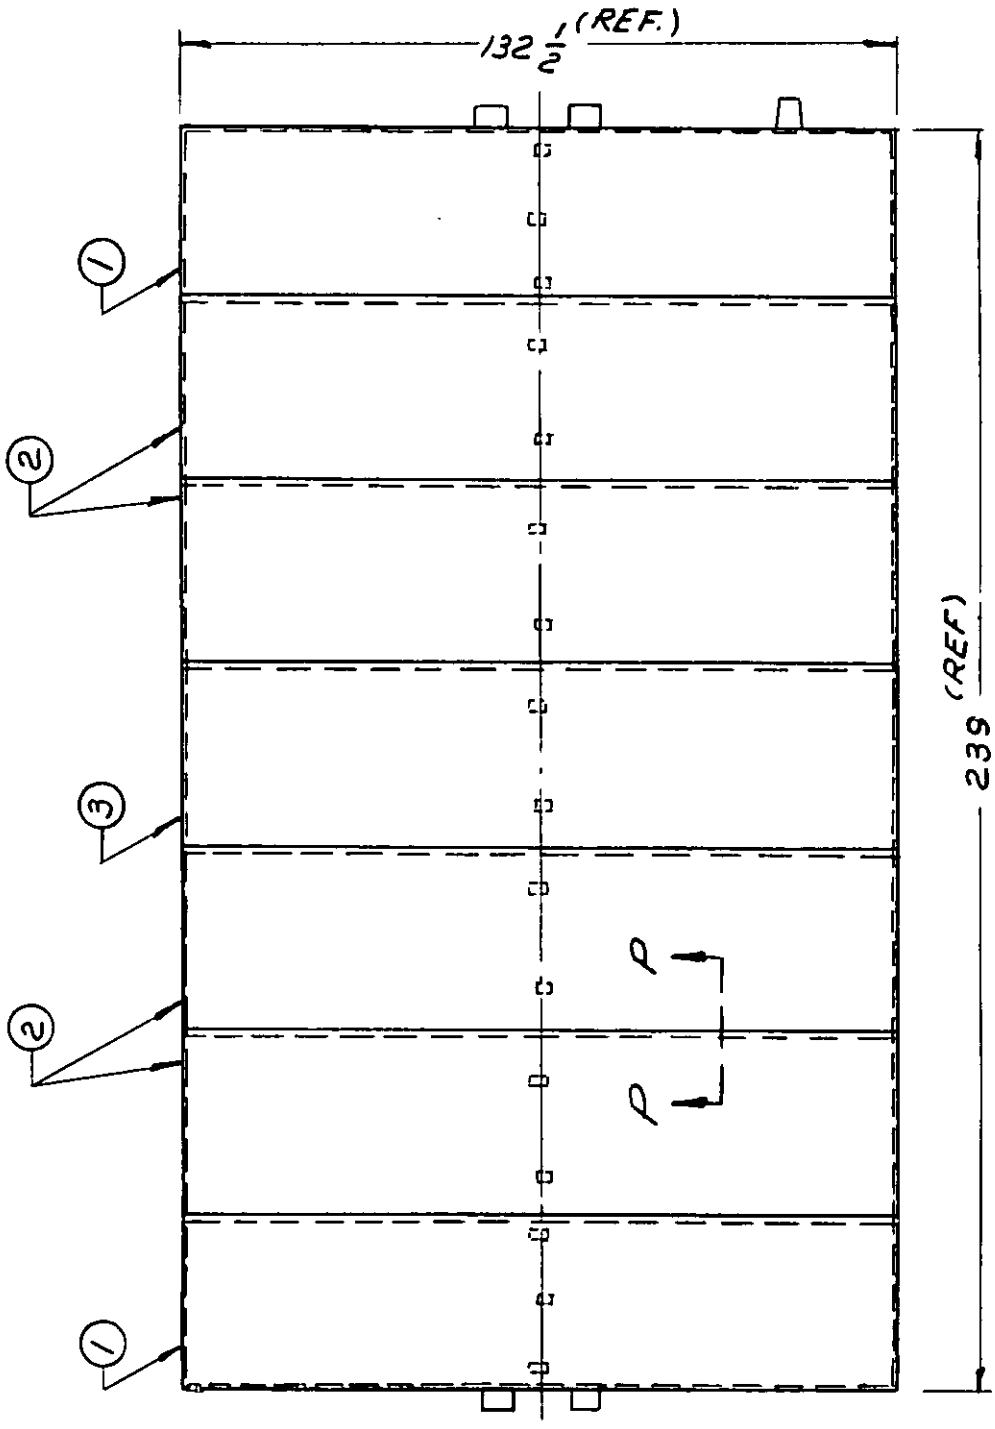


FIGURE 79A
WATERSHED COVER-PLAN VIEW

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

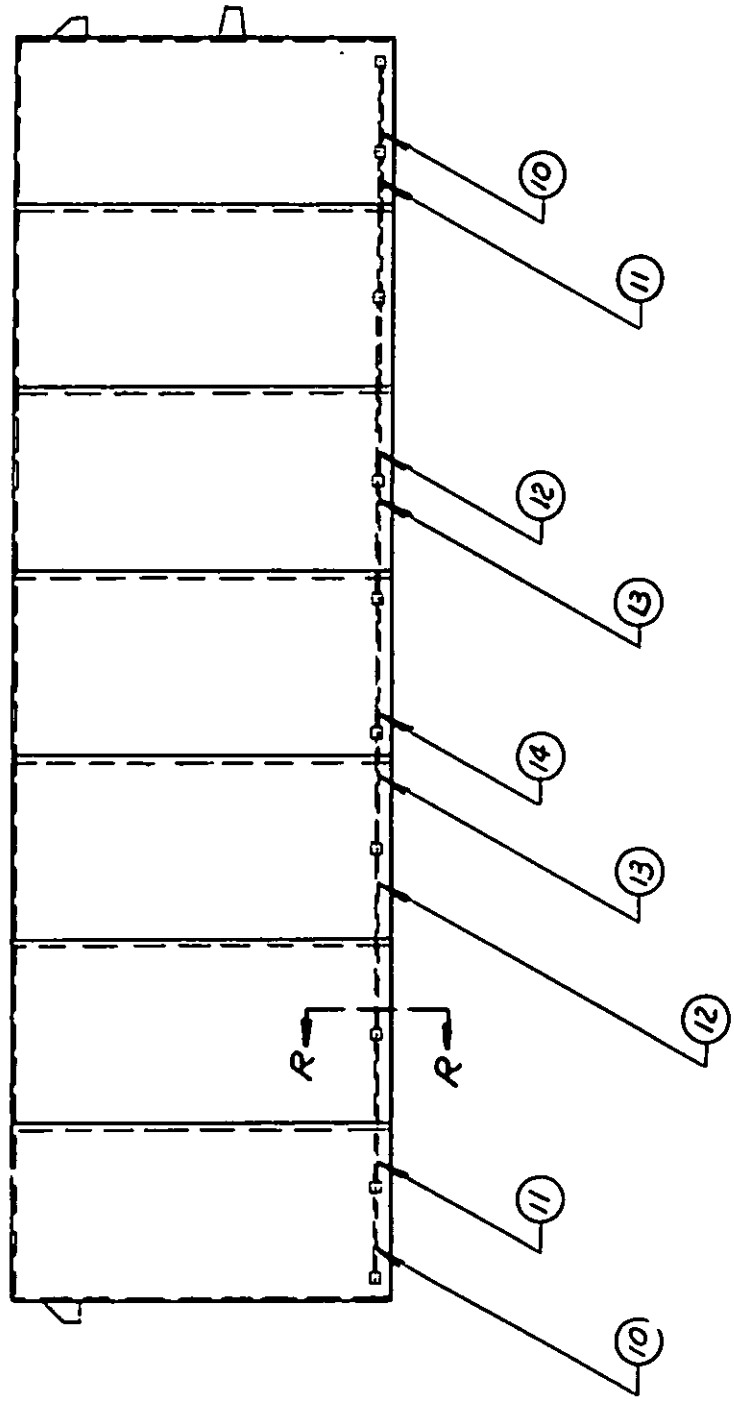


FIGURE 79B
WATERSHED COVER
LEFT & RIGHT ELEVATION

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

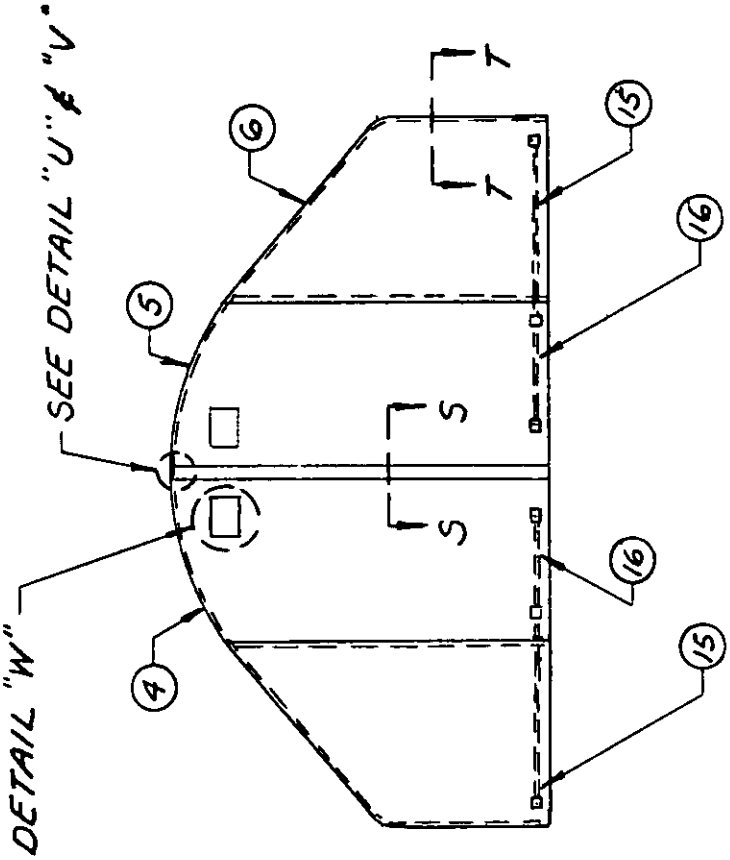


FIGURE 79c
WATERSHED COVER
FRONT ELEVATION

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


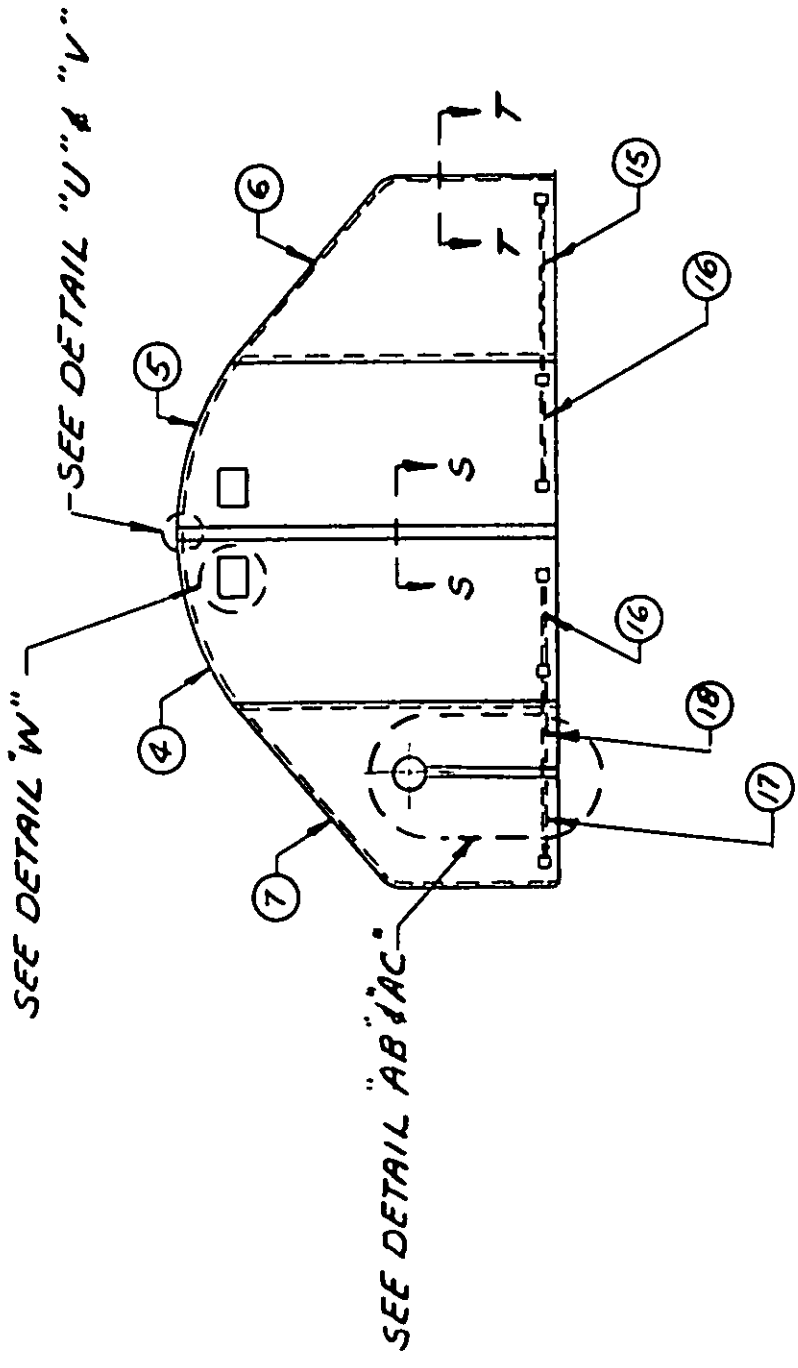



FIGURE 790
WATERSHED COVER
REAR ELEVATION

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

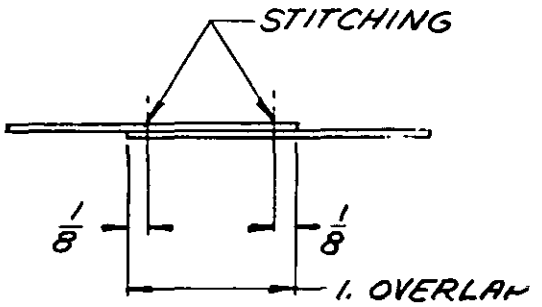

SECTION P-P
TYP SEAM

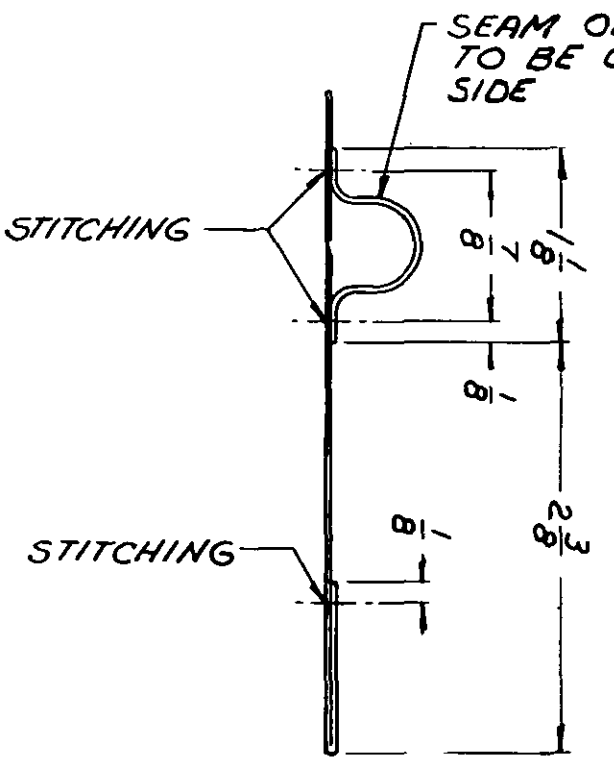


SECTION R-R


SPECIFICATIONS:
SEE FIG. 78

FIGURE 80

Source: https://assist.dla.mil -- Downloaded: 202640-22T02:31Z
Check the source to verify that this is the current version before use.

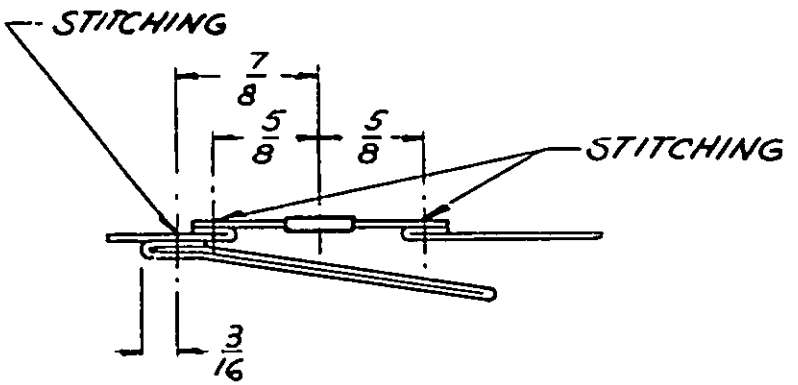

SECTION S-S
TYP. 3 PLACES

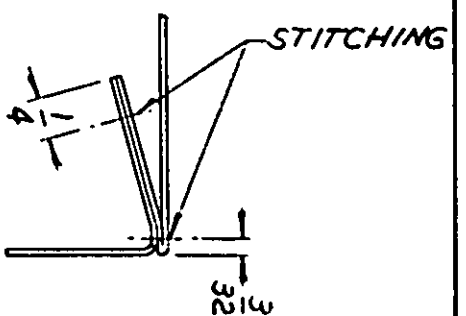


SECTION T-T
TYP. CORNER SEAM

SPECIFICATIONS:
SEE FIG. 78

FIGURE 81

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

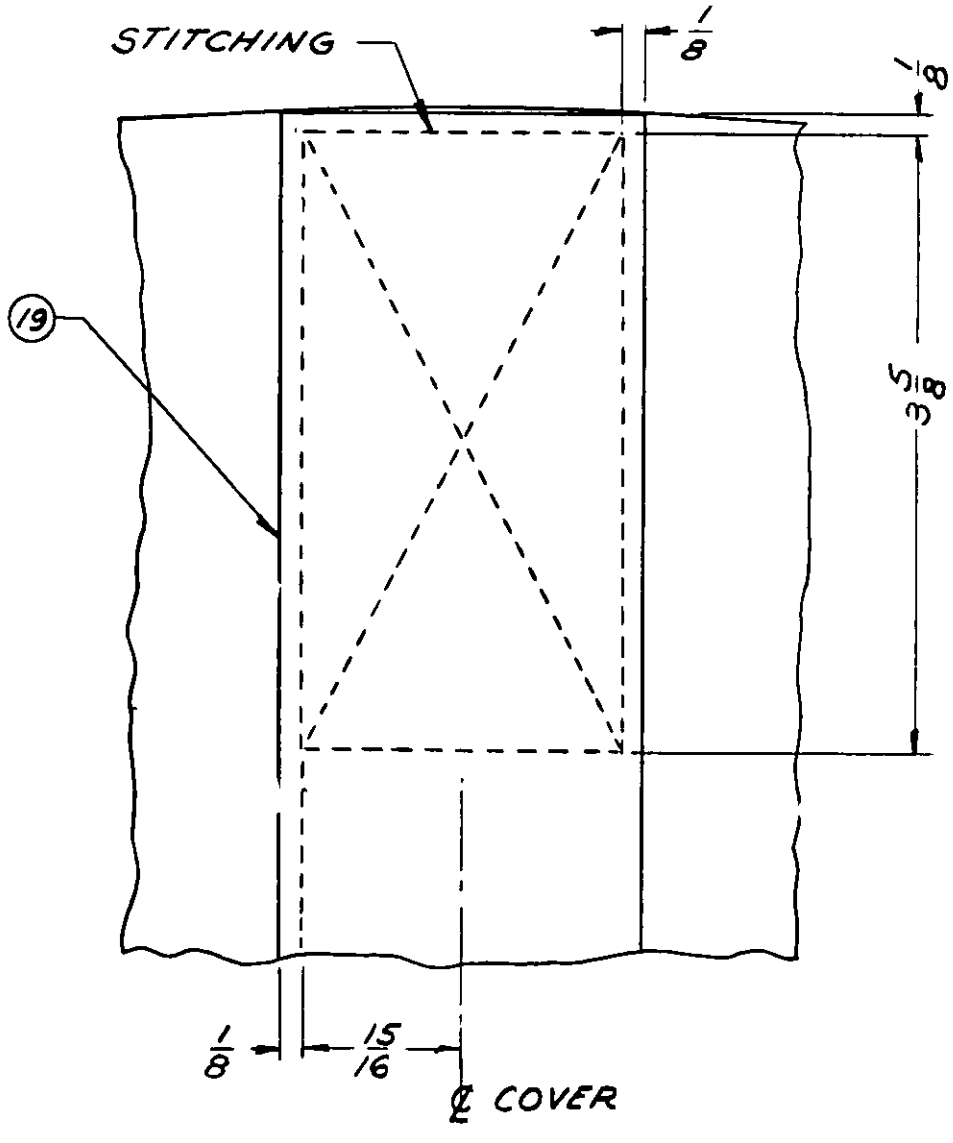


DETAIL "U"
TYP. 2 PLACES

NOTE:
SEE DETAIL "V" SHOWING
ZIPPER FLAP REMOVED

SPECIFICATIONS:
SEE FIG. 78

FIGURE 82

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

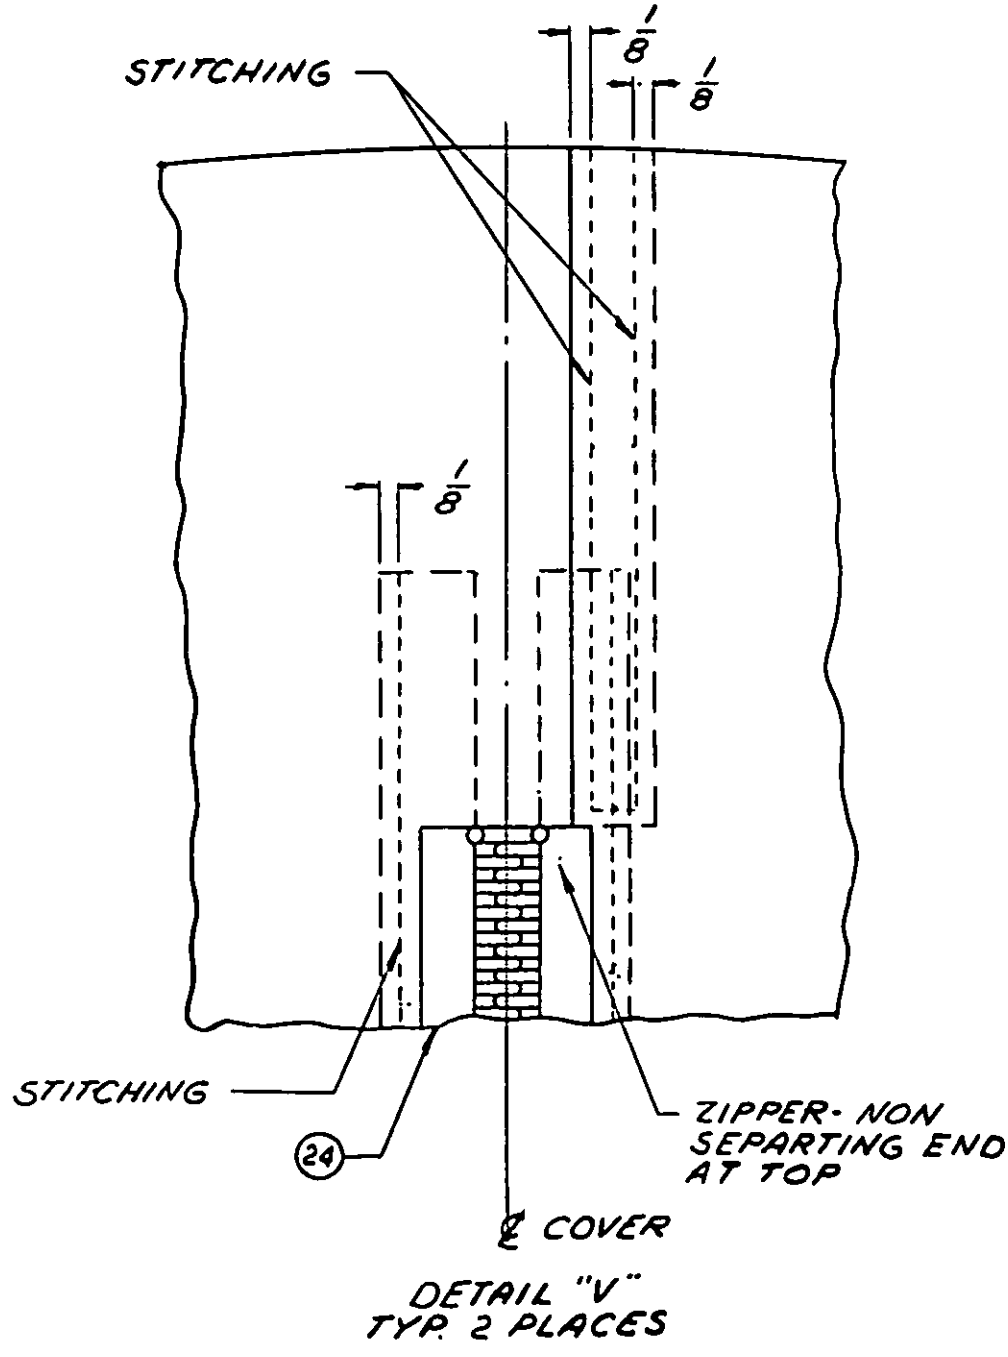

NOTE:
FIGURE 104 REMOVED TO SHOW ZIPPER

FIGURE 83

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


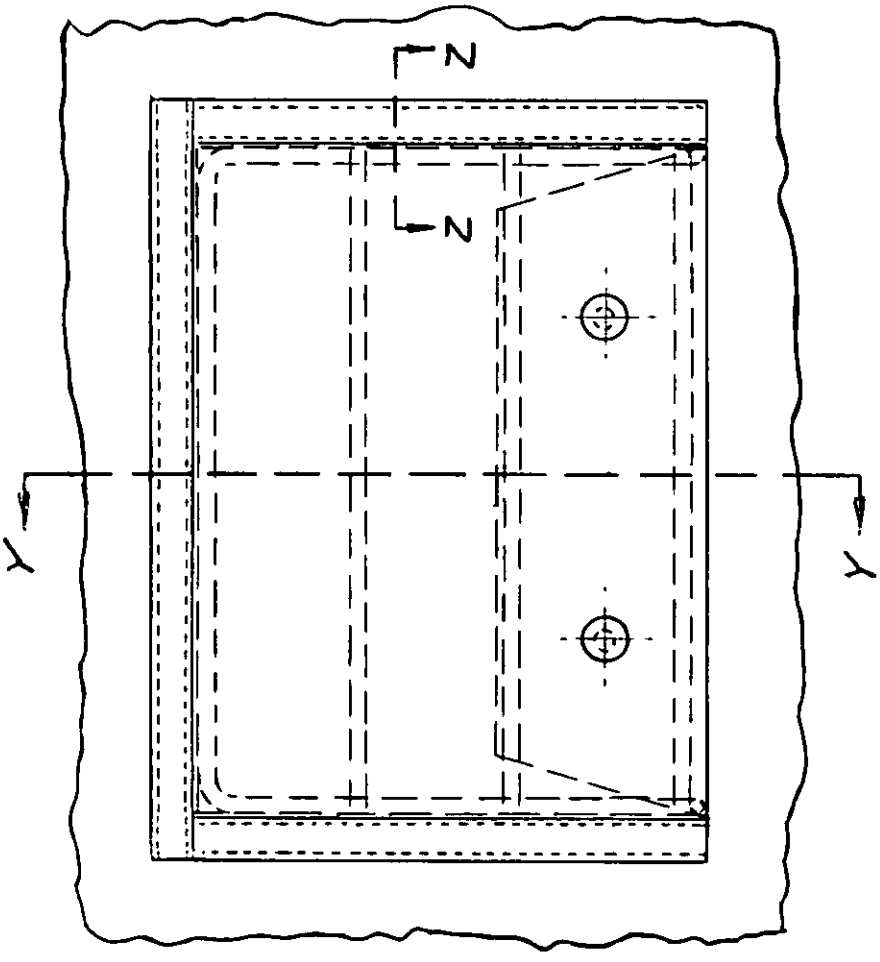


FIGURE 84


DETAIL "W"
TYP 4 PLACES

SEE FIGURE 85
FOR SECTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

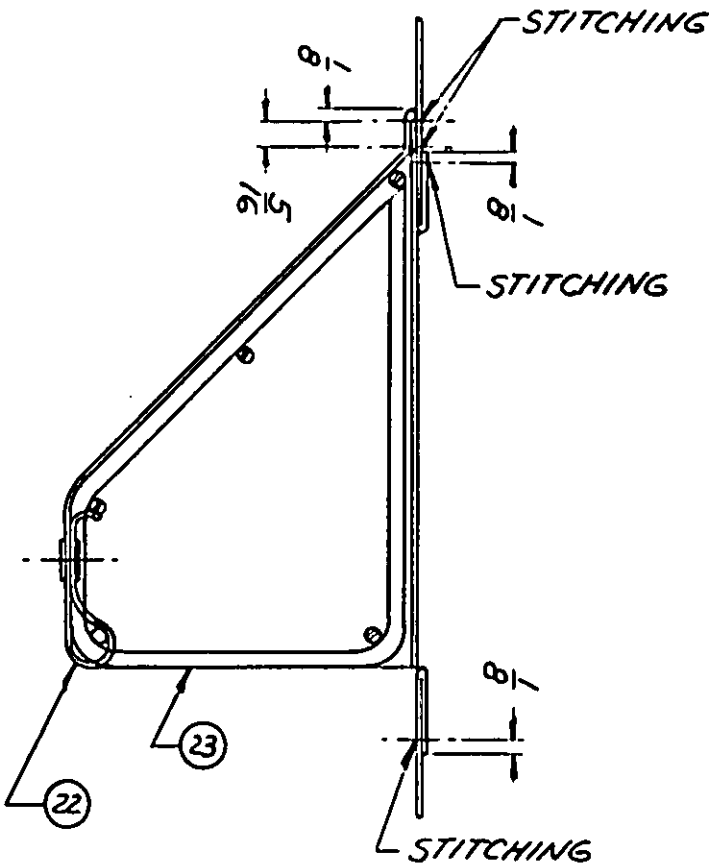

SECTION Y-Y

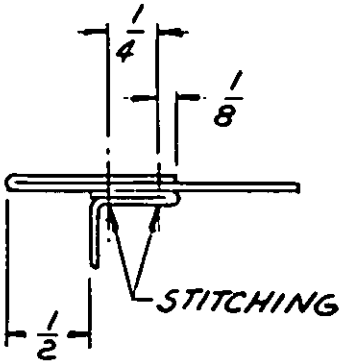


SECTION Z-Z

SPECIFICATIONS:
SEE FIG. 78

FIGURE 85

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

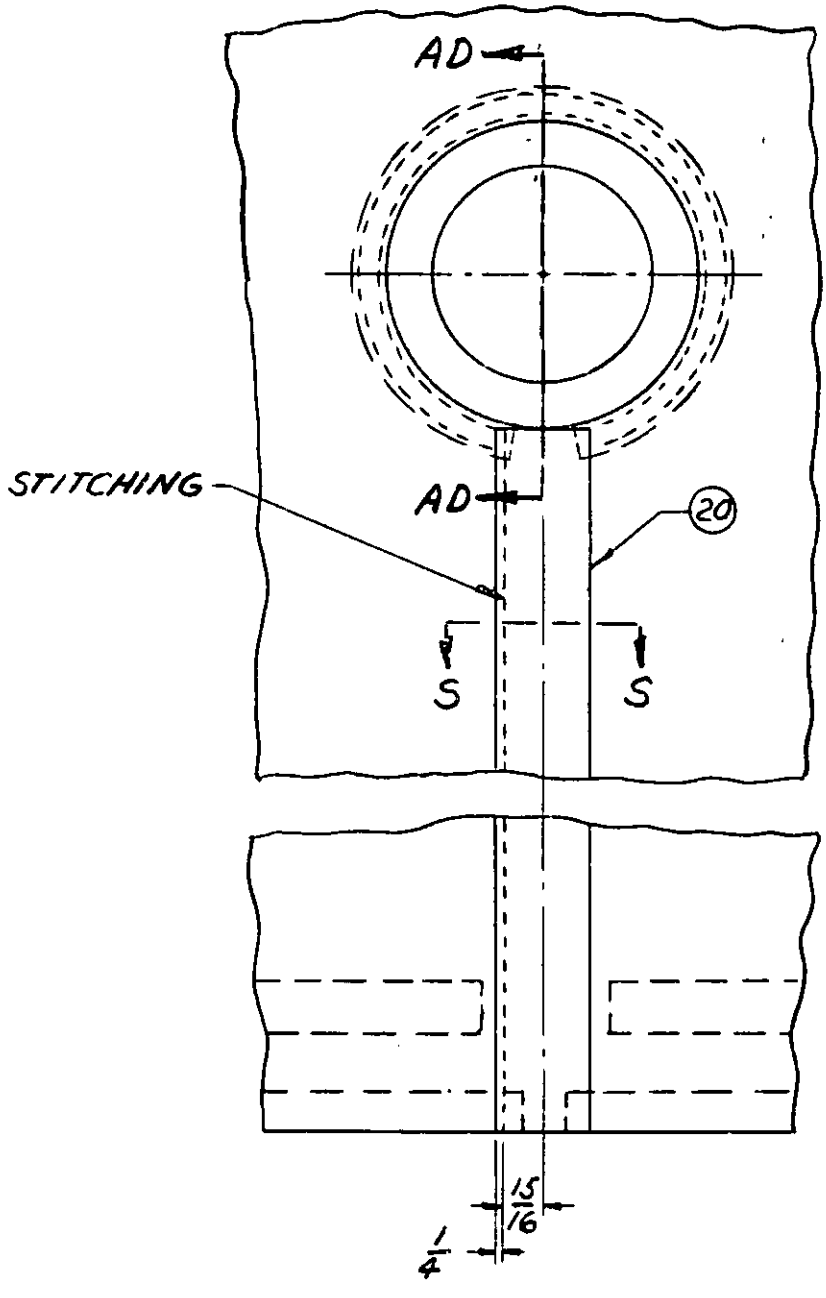

DETAIL "AB"

SPECIFICATIONS:
SEE FIG 78

FIGURE 86

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

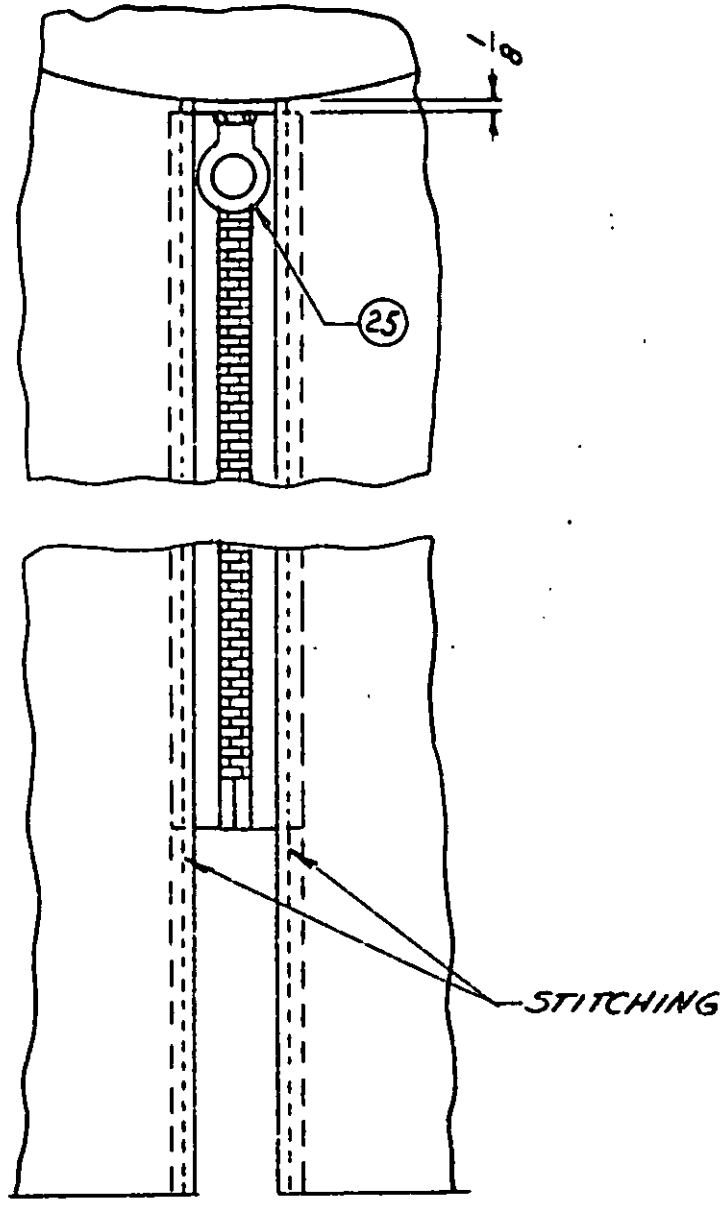



FIGURE REMOVED TO SHOW ZIPPER

DETAIL "AC"

SPECIFICATIONS: SEE FIG. 78

FIGURE 87

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

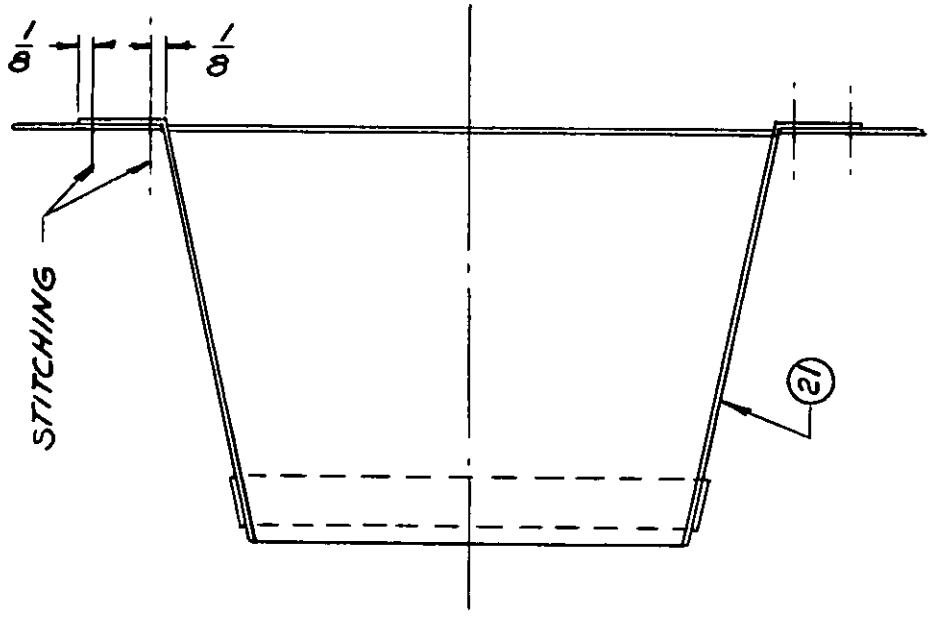

SECTION AD-AD

FIGURE 88

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


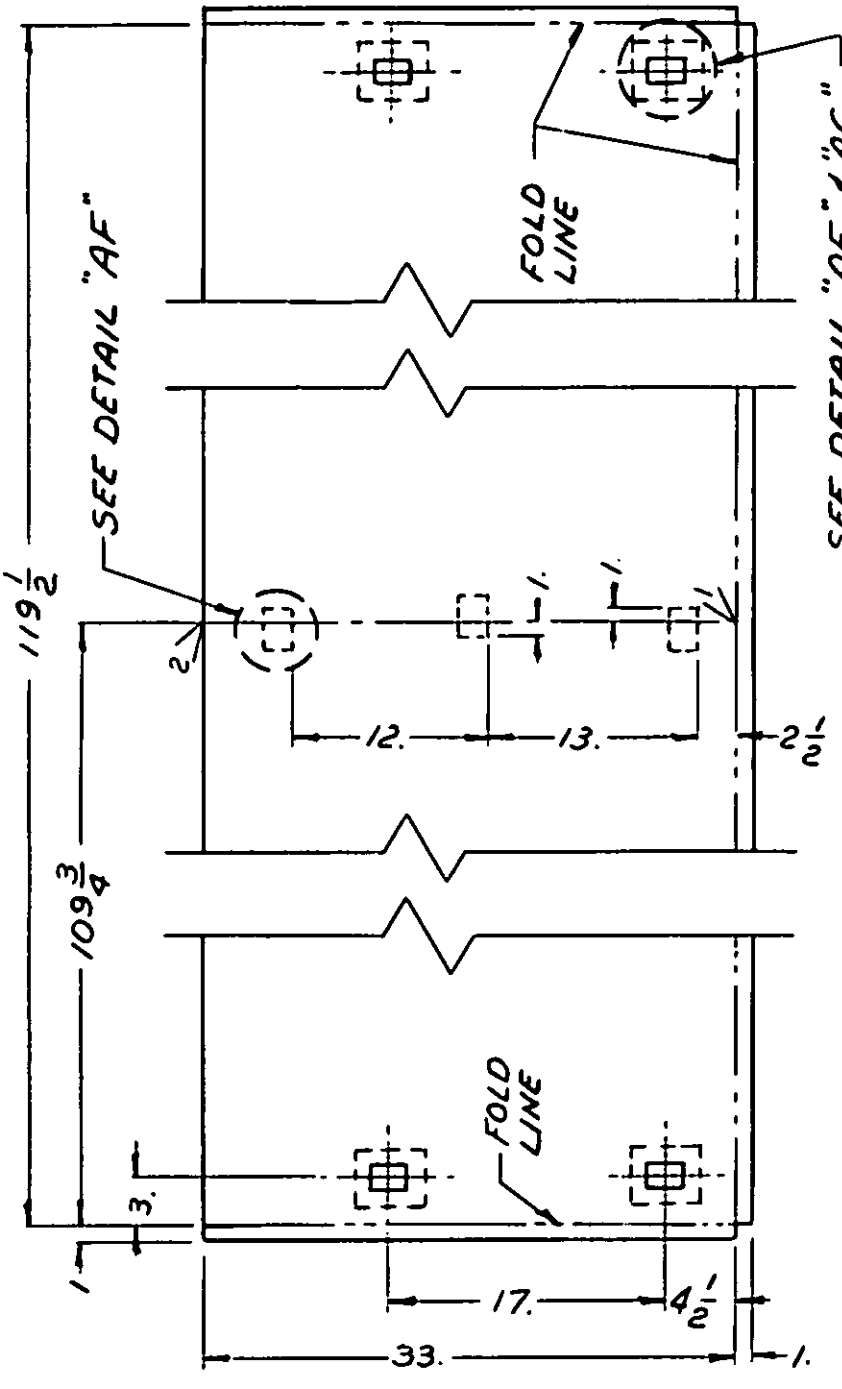


FIGURE 89
SECTION OF COVER TOP & SIDES

SPECIFICATIONS.
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

FIGURE 90
SECTION OF COVER TOP & SIDE

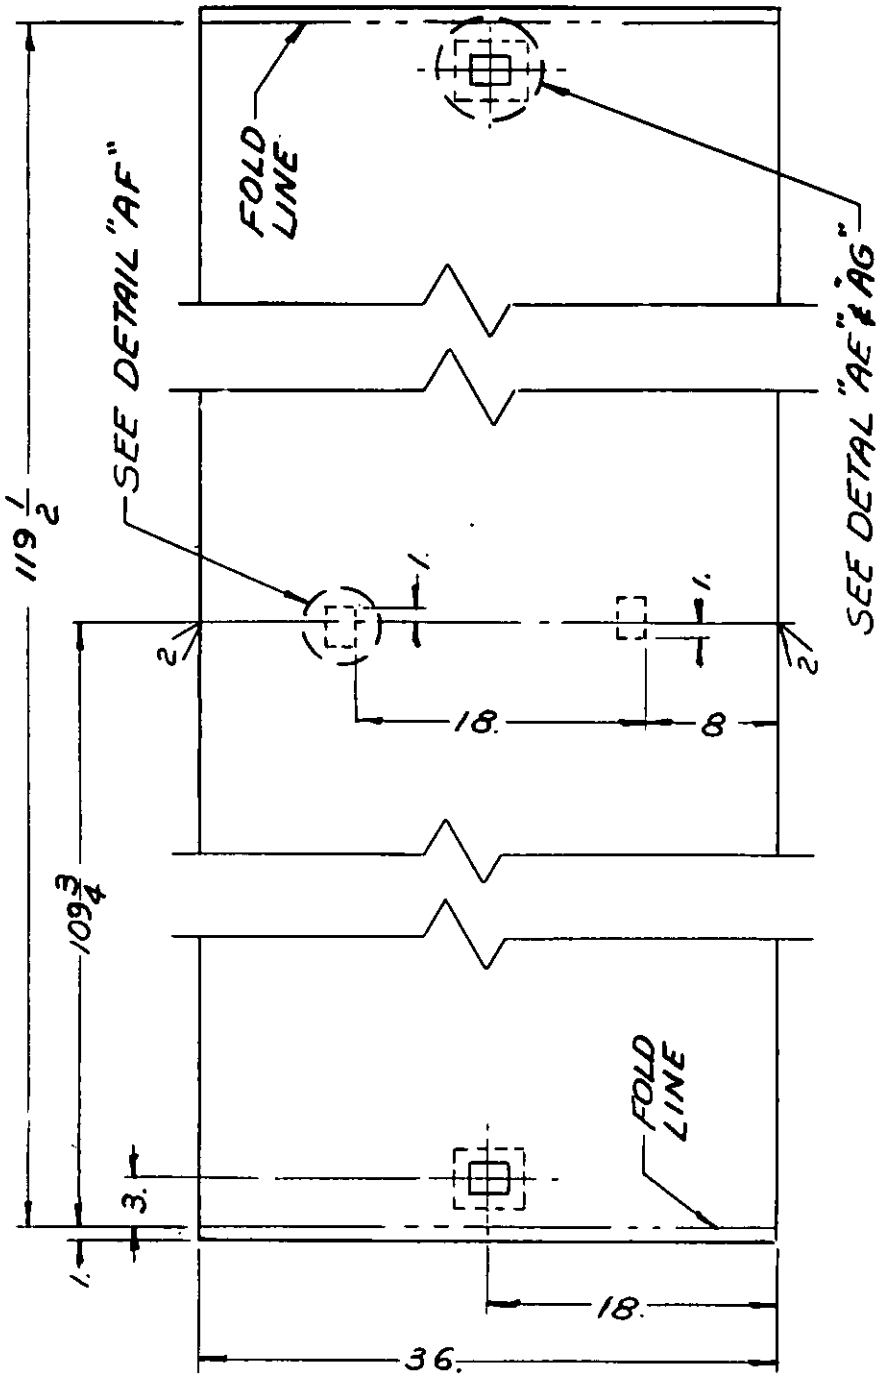

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

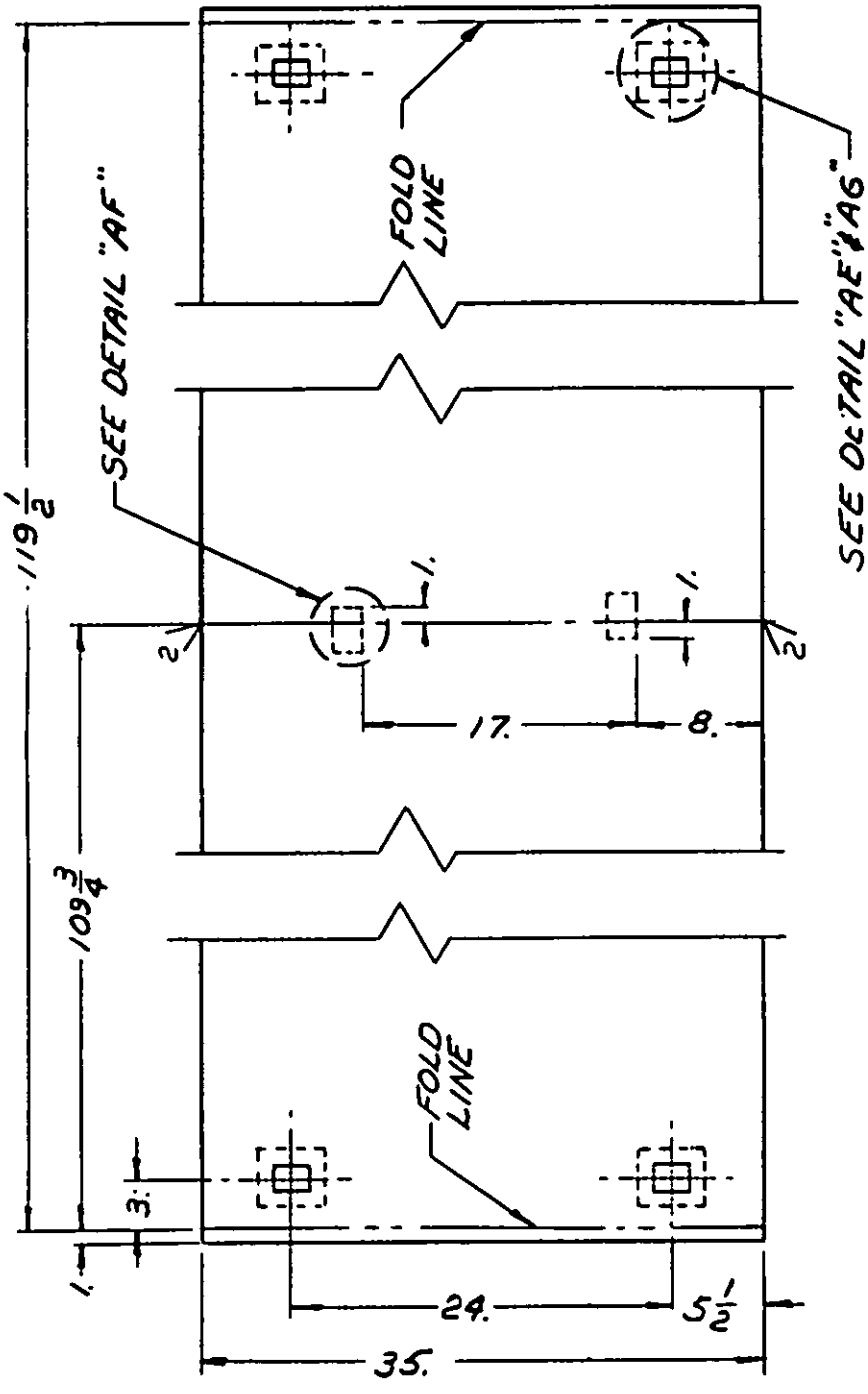


FIGURE 91
SECTION OF COVER TOP & SIDES

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

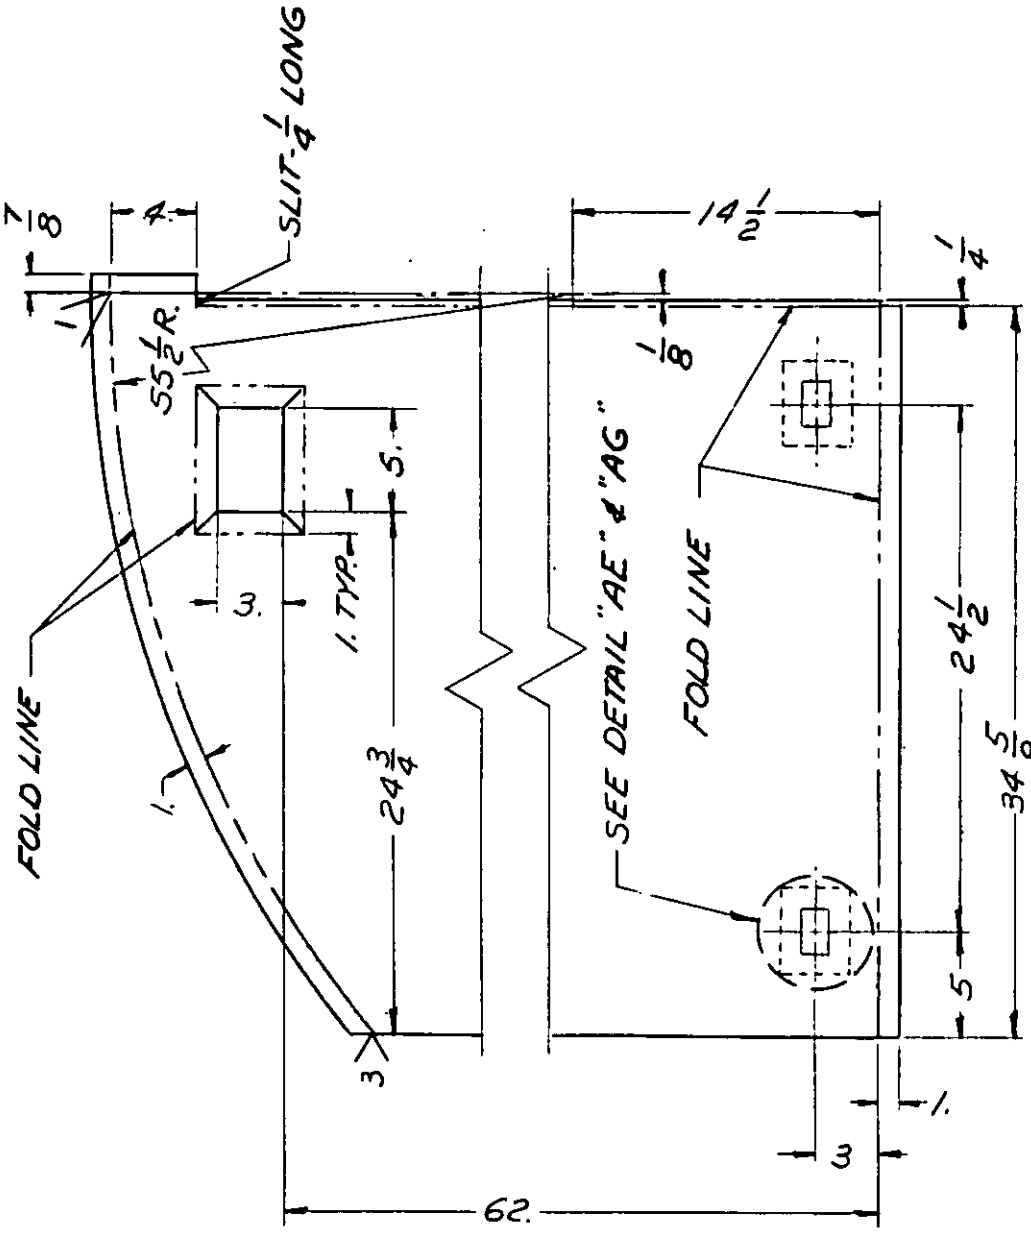


FIGURE 92
SECTION OF COVER-END

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

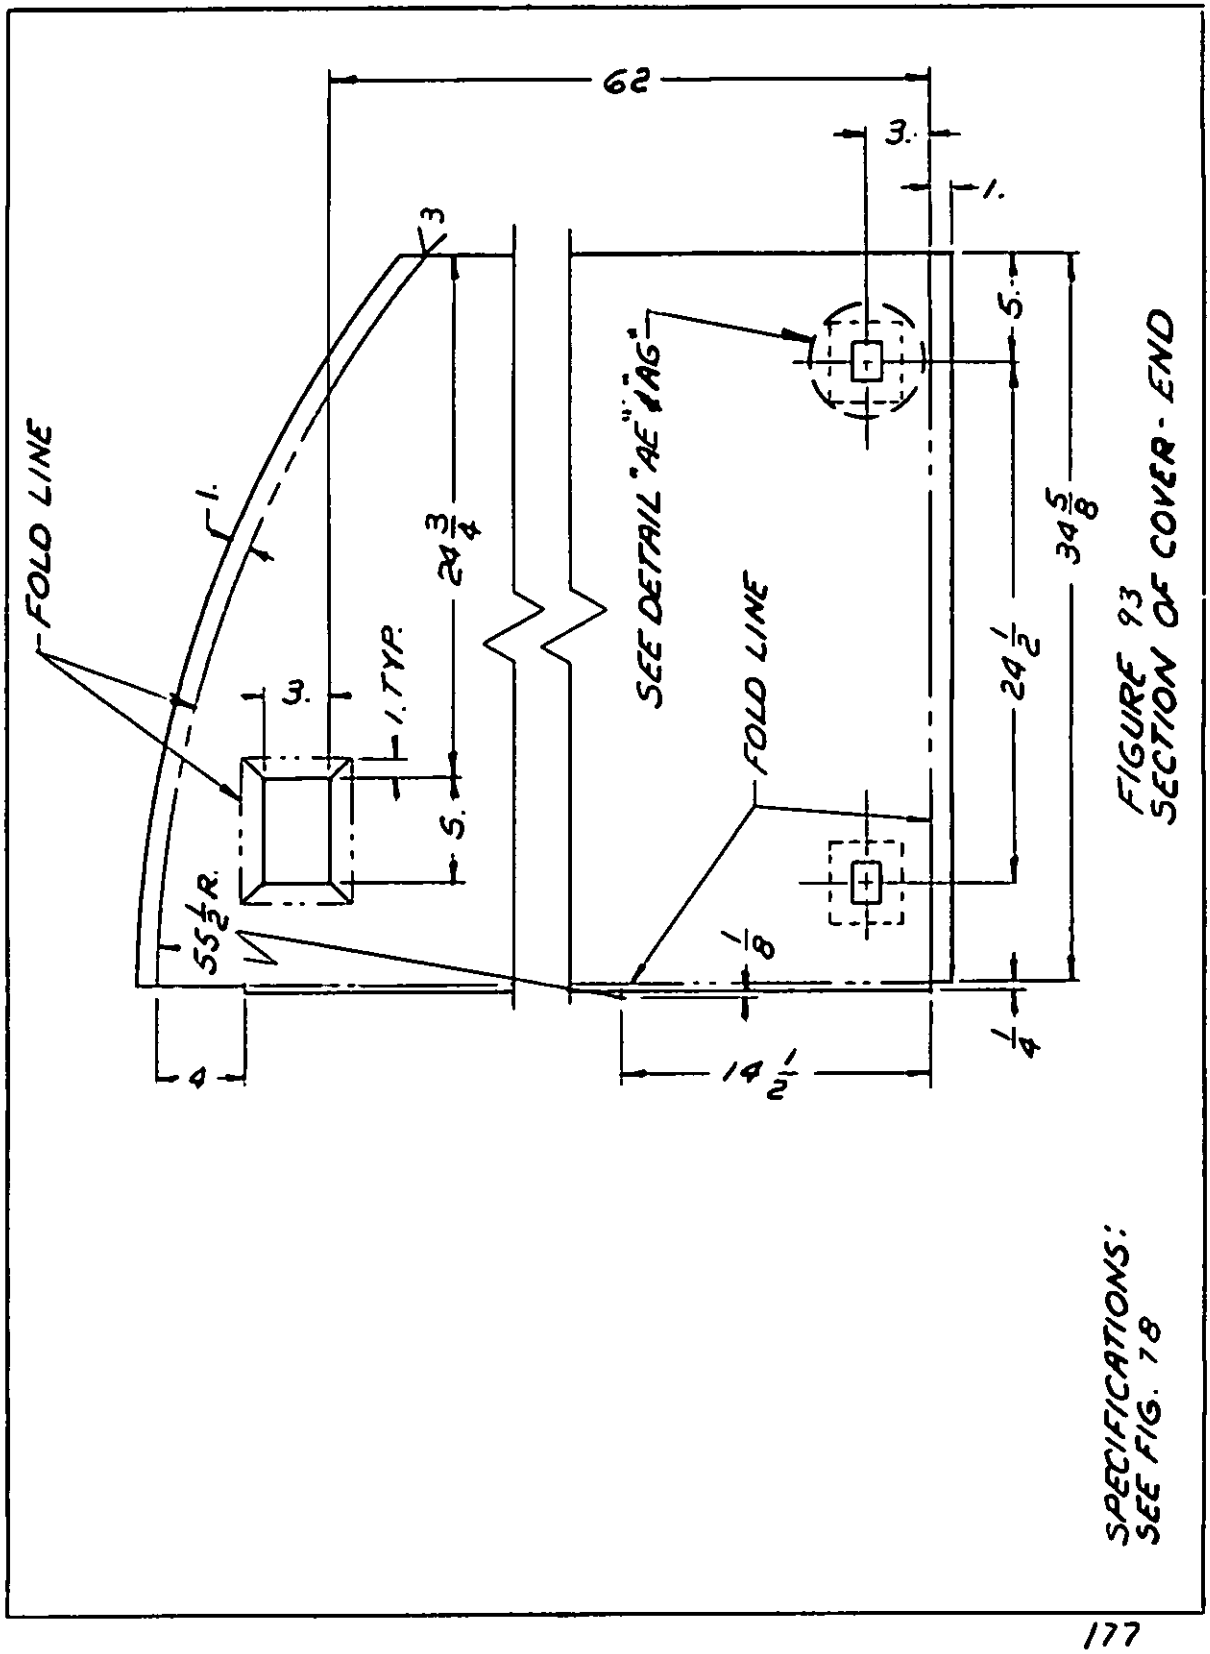


FIGURE 93
SECTION OF COVER - END

SPECIFICATIONS:
SEE FIG. 18

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


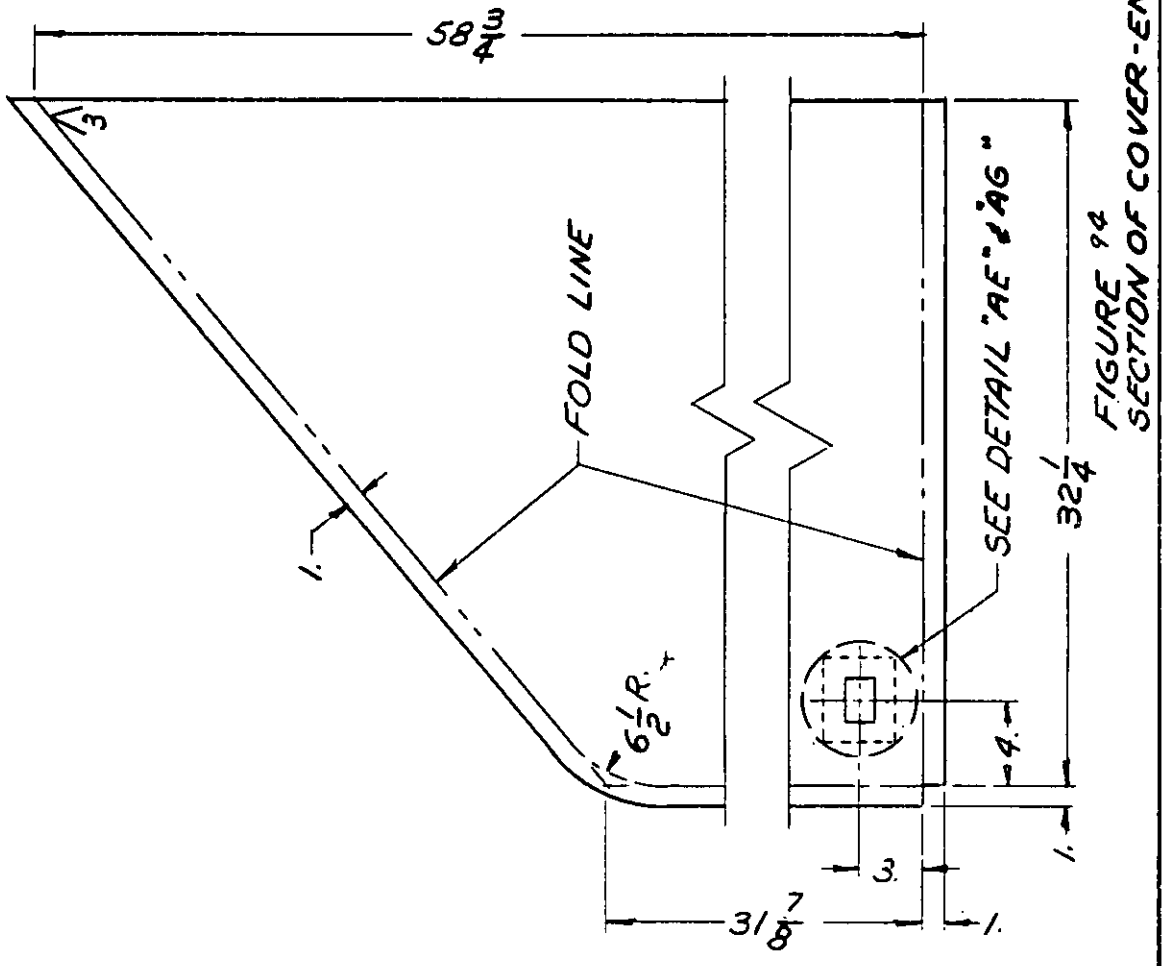


FIGURE 94
SECTION OF COVER-END

SPECIFICATIONS:
SEE FIG. 78


Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

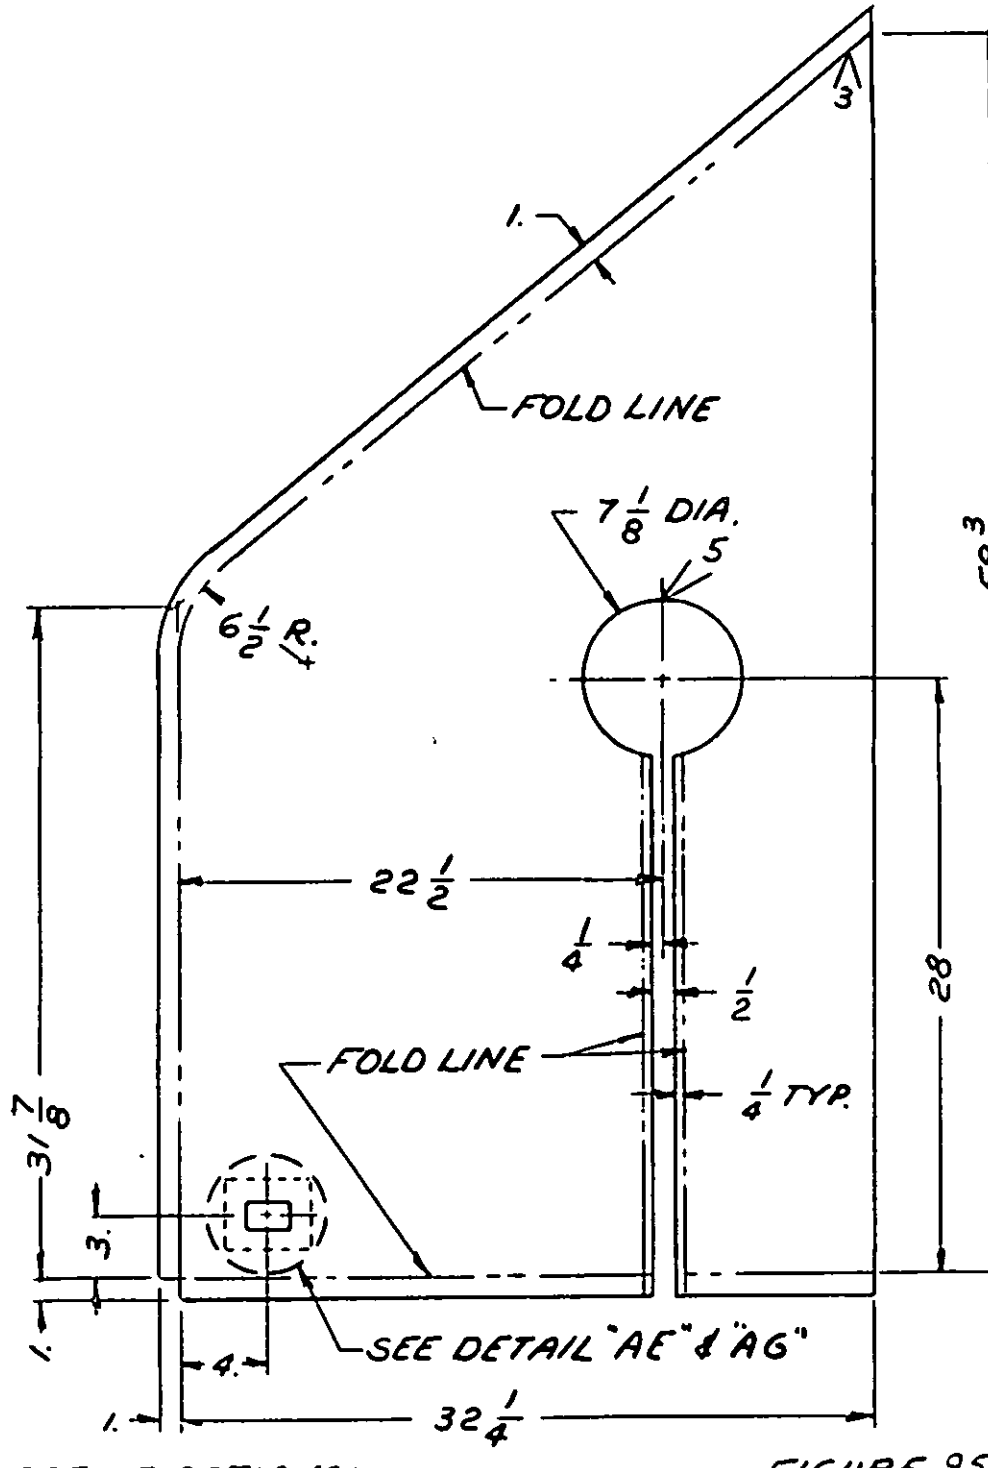


SPECIFICATIONS:
SEE FIG. 78

FIGURE 95
SECTION OF COVER

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

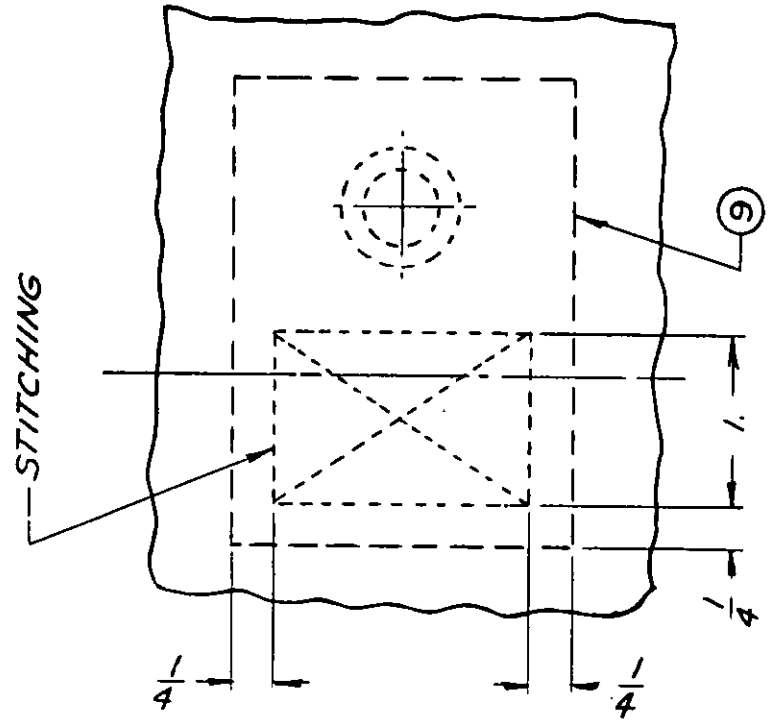

DETAIL "AF"
TYP. 16 PLACES

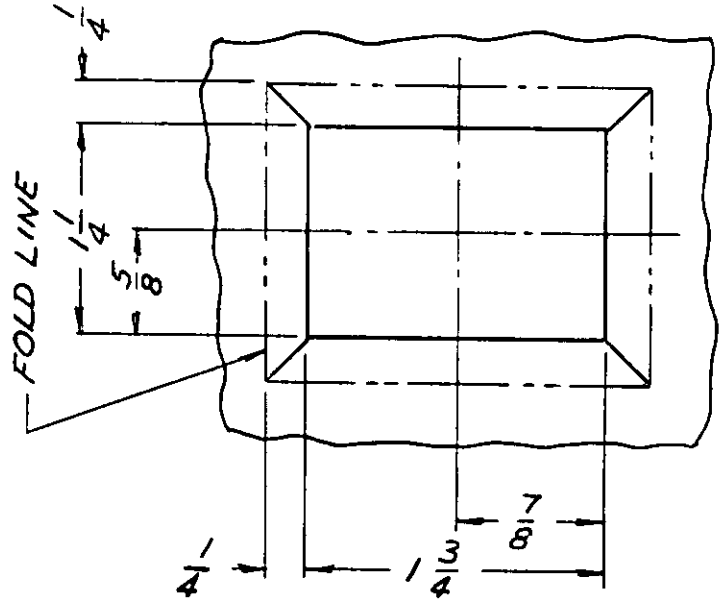


DETAIL "AE"
TYP. 32 PLACES
SEE DETAIL "AG"
SHOWING REINFORCEMENT
STITCHED IN PLACE

SPECIFICATIONS:
SEE FIG. 78

FIGURE 96

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

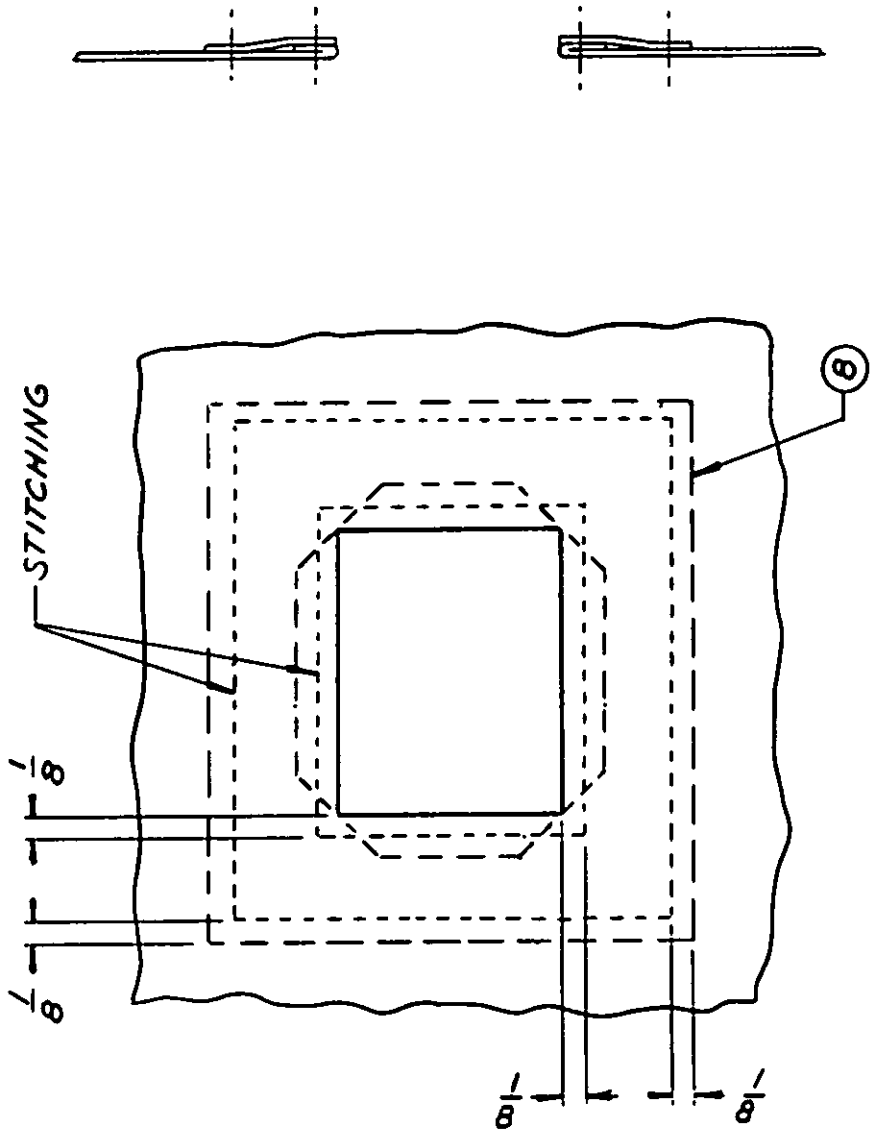

DETAIL "AG"
TYP. 32 PLACES

FIGURE 97

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

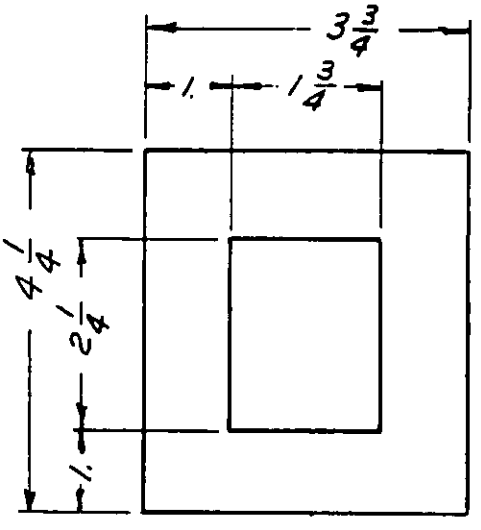


FIGURE 98
REINFORCEMENT

SPECIFICATIONS:
SEE FIG 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

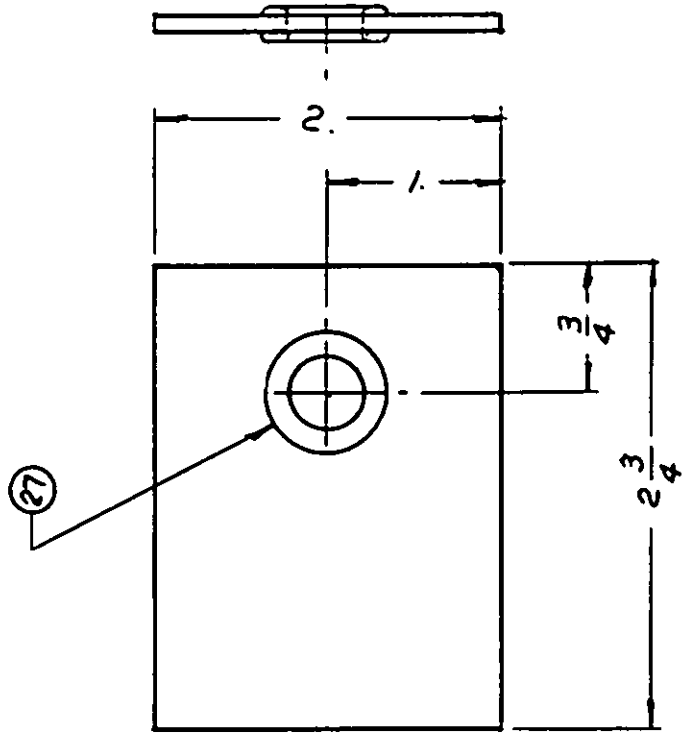


FIGURE 99
WEBBING

MATERIAL NOTE
COTTON WEBBING
TYPE III COLOR O.D.
WATER REPELLENT &
MILDEW RESISTANT
SPEC. MIL-W-530

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

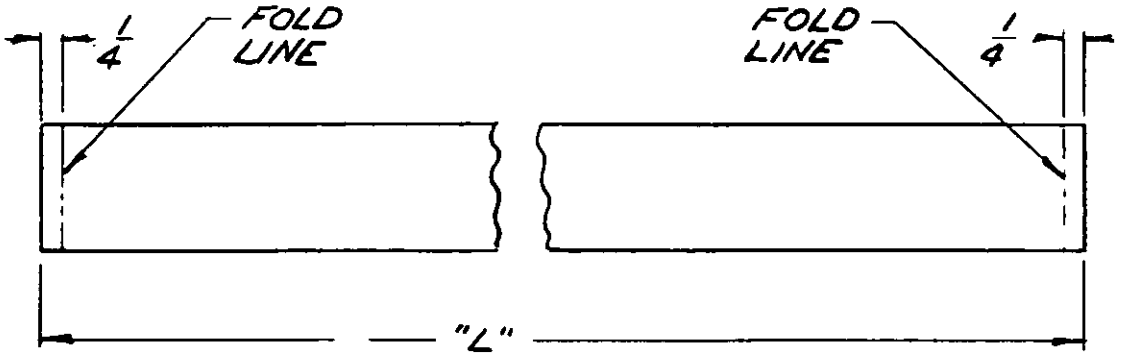


FIGURE NUMBER	REQ'D.	"L"
FIGURE 100	4	15 1/4
FIGURE 101	4	26 3/4
FIGURE 102	4	33 1/4
FIGURE 103	4	20 3/4
FIGURE 104	2	22 1/4
FIGURE 105	3	30 1/2
FIGURE 106	4	22 3/4
FIGURE 107	1	17
FIGURE 108	1	20 1/2

SPECIFICATIONS:
SEE FIG 78

STRIP

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

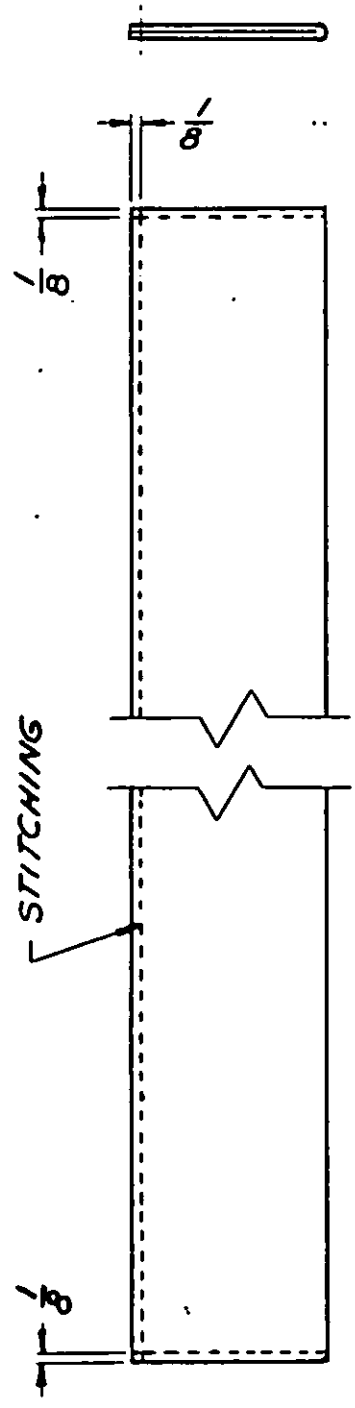


FIGURE 109A
ZIPPER FLAP

SPECIFICATIONS:
SEE FIG. 78

FOR DEVELOPMENT OF
ZIPPER FLAP SEE
FIGURE 109B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

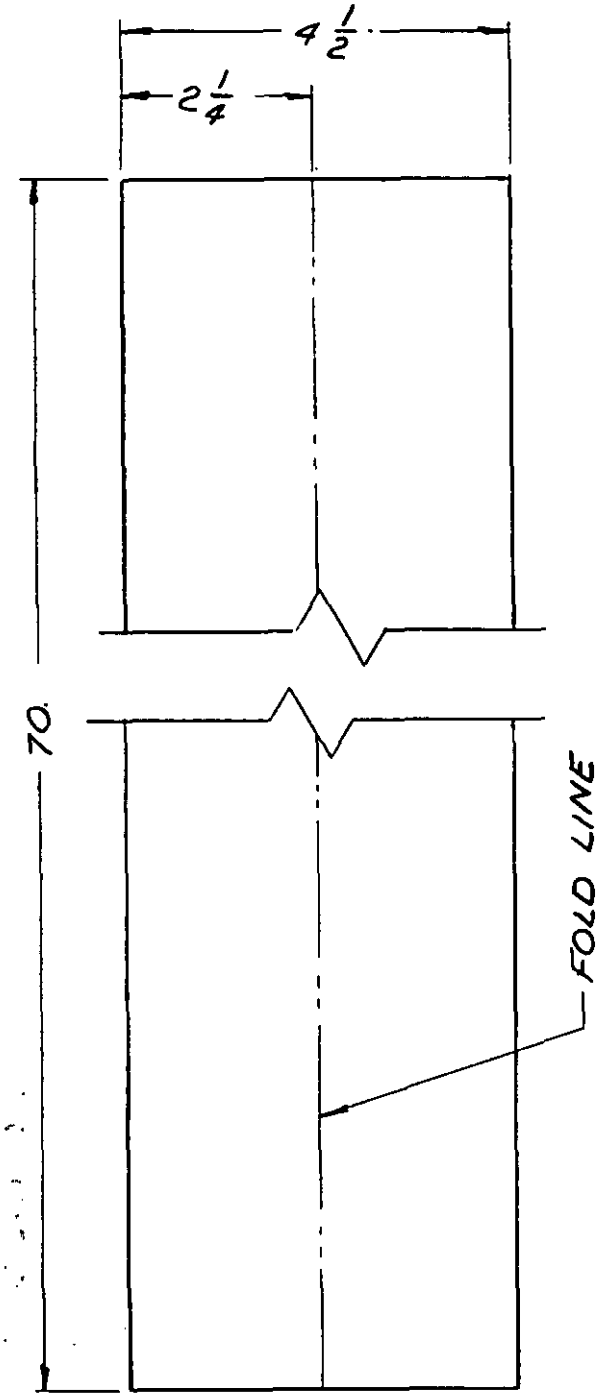


FIGURE 1098
DEVELOPMENT OF FIGURE

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

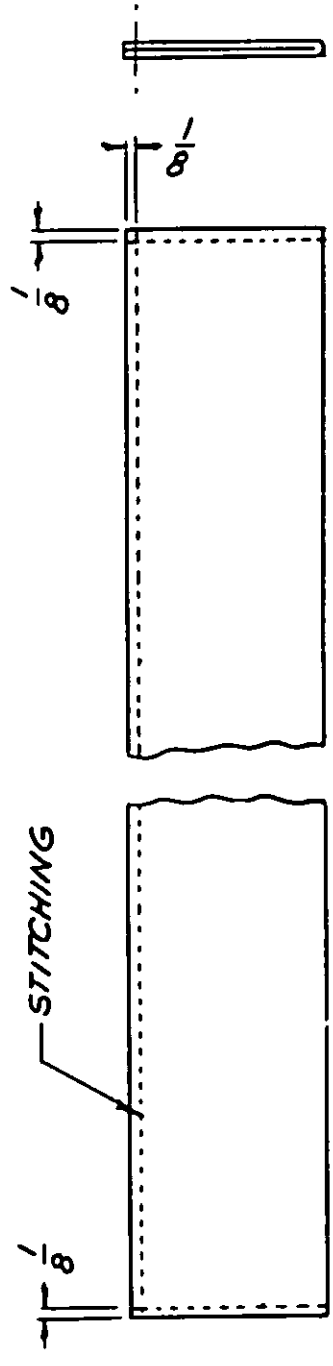


FIGURE 110A
ZIPPER FLAP

SPECIFICATIONS:
SEE FIG 78

FOR DEVELOPMENT OF
ZIPPER FLAP SEE
FIG 110B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

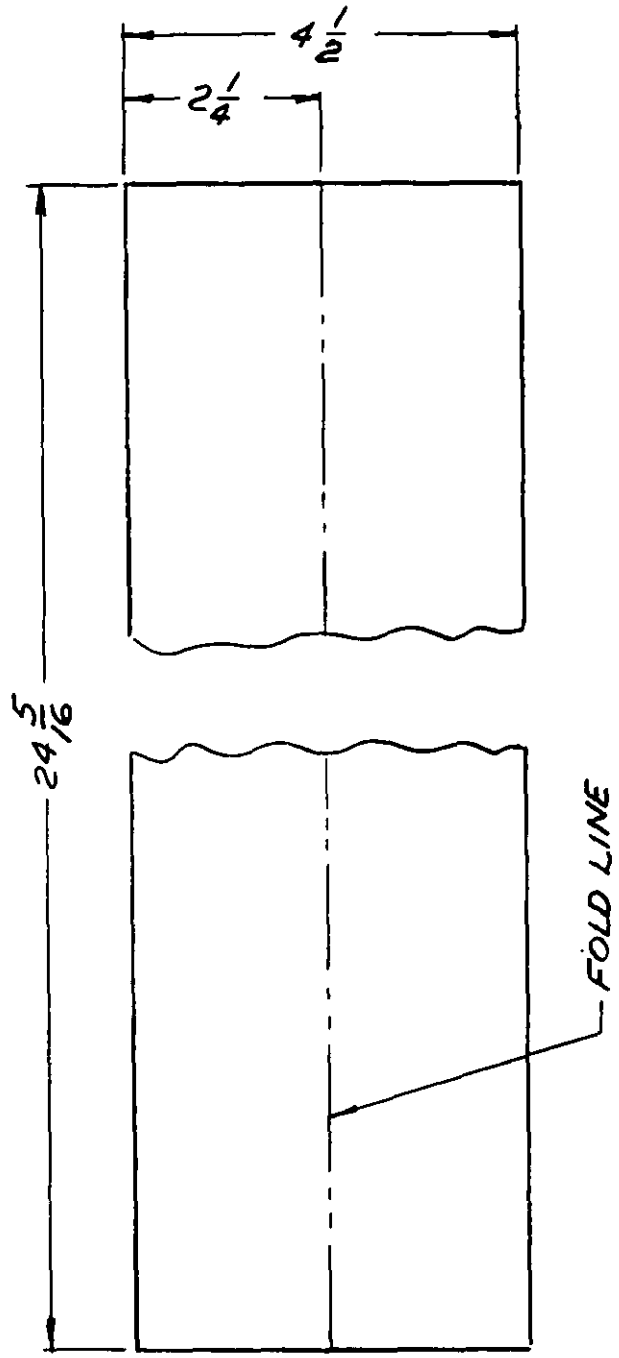


FIGURE 110B
DEVELOPMENT

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

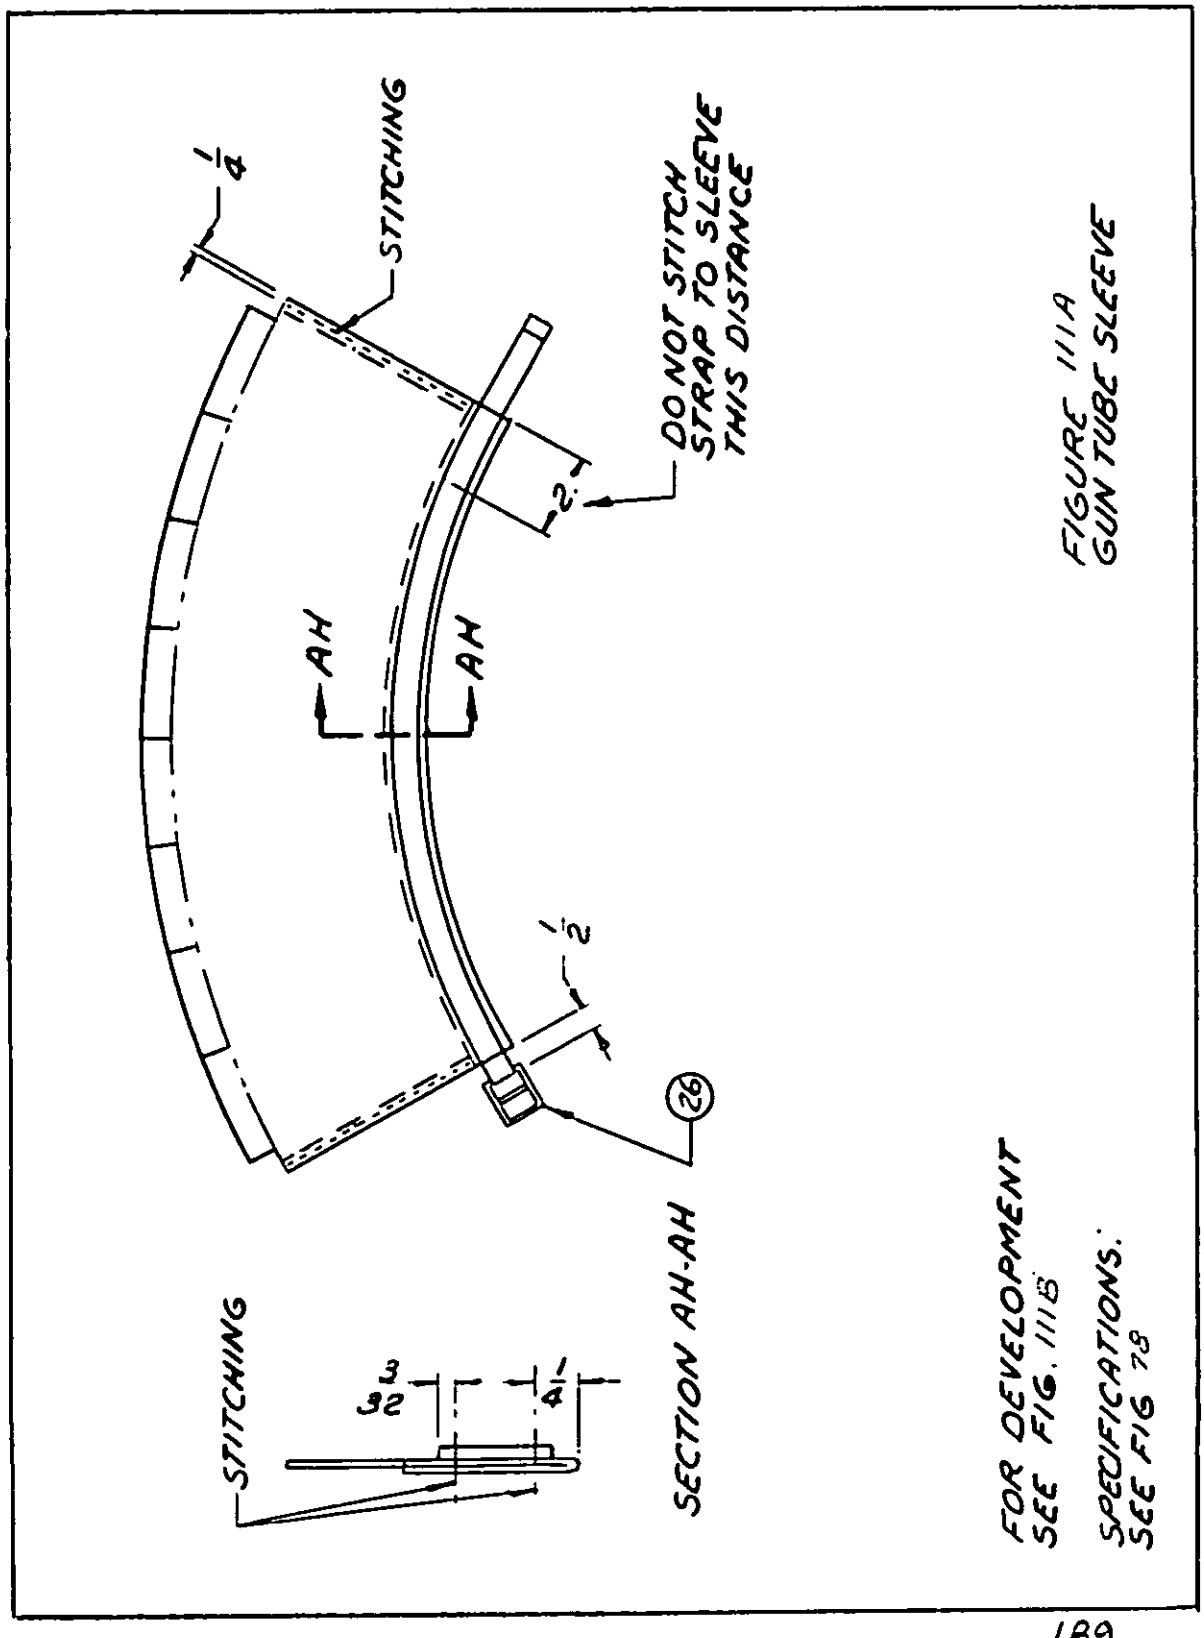


FIGURE 111A
GUN TUBE SLEEVE

FOR DEVELOPMENT
SEE FIG. 111B

SPECIFICATIONS:
SEE FIG 78

Source: https://assist.dla.mil -- Downloaded: 20261O-22T02:31Z
Check the source to verify that this is the current version before use.

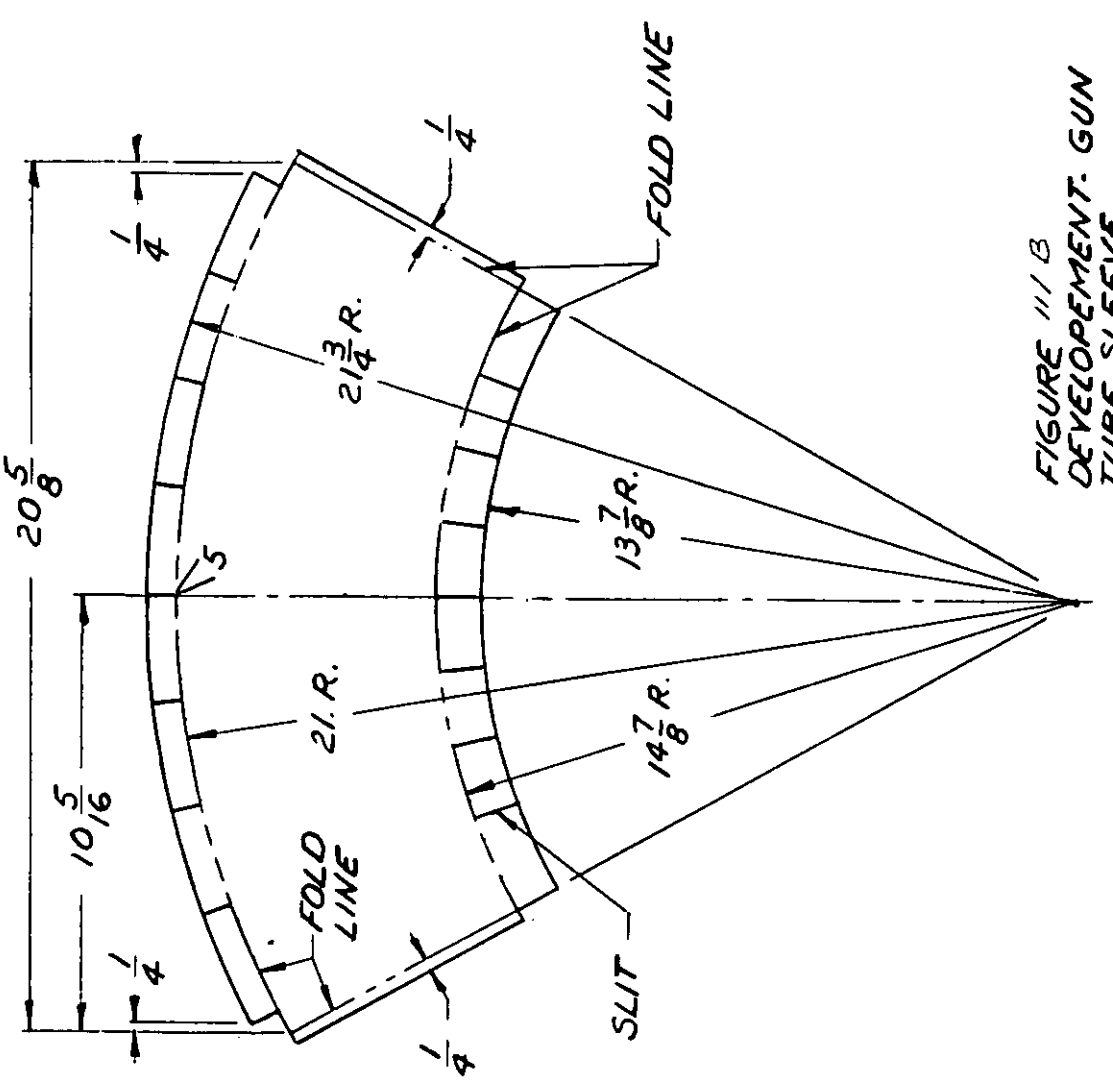


FIGURE 111 B
DEVELOPEMENT. GUN TUBE SLEEVE

SPECIFICATIONS:
SEE FIG. 78

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

PART LIST VENTILATOR COVER

ITEM NO.	FIG NO.	PART NAME	REQ'D.
1	114	COVER SECTION-TOP	1
2	115	COVER SECTION-SIDE	2

STANDARD HARDWARE

ITEM NO	REQ'D.	PART NAME	SIZE	ORDNANCE PART NO.
3	2	FASTENER, BUTTON	11/64 LG.	425937
4	2	FASTENER, SOCKET		425936
5	2	FASTENER, STUD		190285
6	2	FASTENER, EYELET	1/4 LG	425935

SPECIFICATION:

MATERIAL NOTE:
CLOTH, COATED, TYPE II, CLASS 3,
SPEC MIL-C-20696
WAIVE PARA 3.5
COLOR GREEN SHADE DESIGNATED
NO. FED. STD. 595

ALL SOURCES MUST SUPPLY AN ITEM EQUIVALENT TO THE MANUFACTURERS ITEM INDICATED, ORDNANCE CORP. APPROVAL REQUIRED.

> DENOTES MATCH POINT. LIKE NUMBERS MATCH.

FIGURE 112A

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.


THREAD, NYLON
TYPE II, CLASS I
SIZE F, COLOR O.D.
SPEC. V-T-295

NOTE:
STITCHING, TYPE 301 PER SPEC. FED-STD-751
8-10 STITCHES PER INCH. SMALLEST NEEDLE
SIZE FEASIBLE SHOULD BE USED IN ORDER
TO ASSURE WEATHER PROOF SEAMS


SEAM ALL ALLOWANCE MAY VARY
TO SUIT MANUFACTURER


FIGURE 112B

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.




DETAIL "AJ"

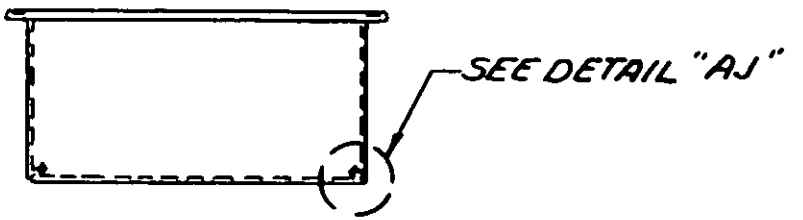




SECTION AK-AK

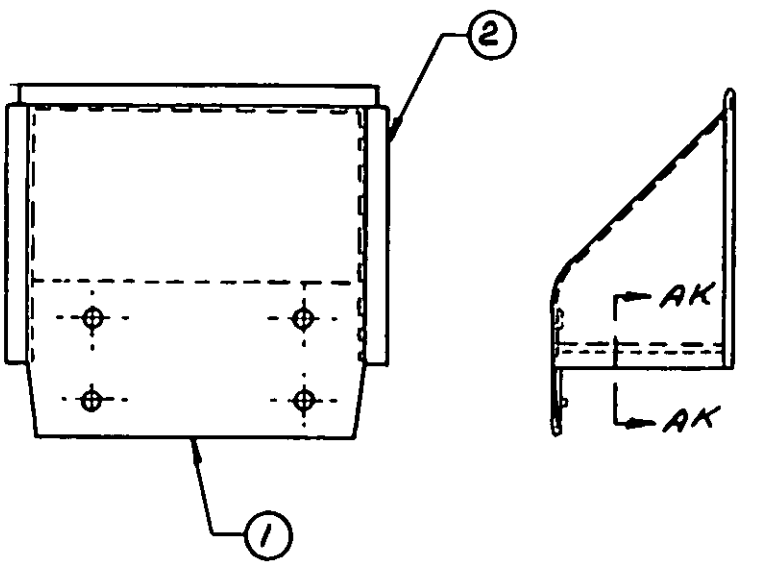

SPECIFICATIONS:
SEE FIG. 112


FIGURE 113
VENTILATOR COVER

Source: https://assist.dla.mil -- Downloaded: 2026/10-22T02:31Z
Check the source to verify that this is the current version before use.

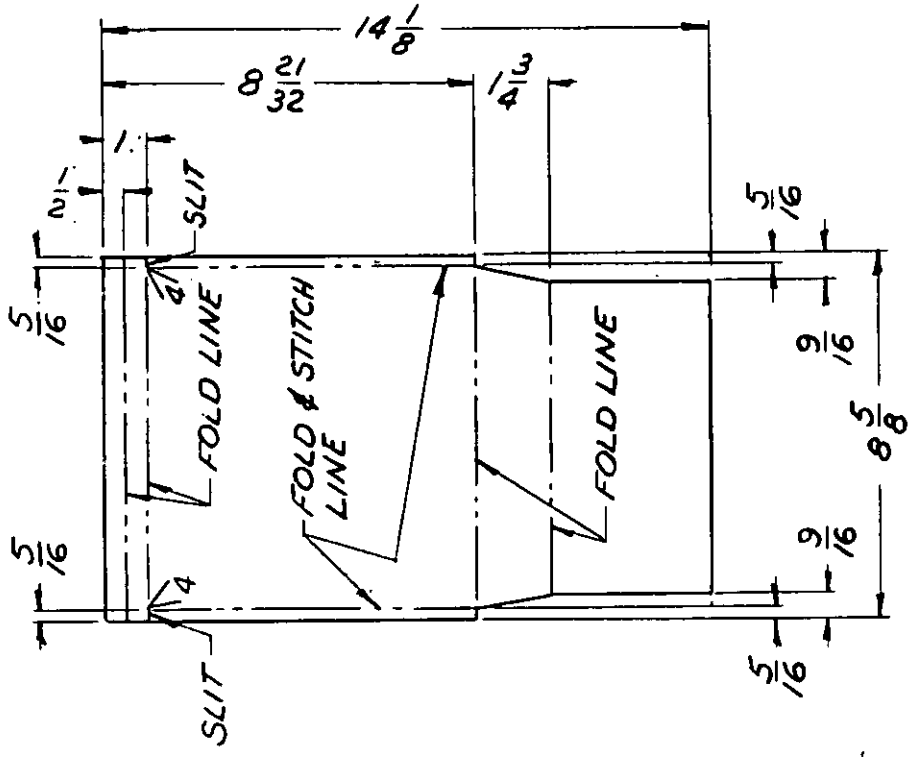

DEVELOPMENT

FIGURE 114
COVER SECTION-TOP

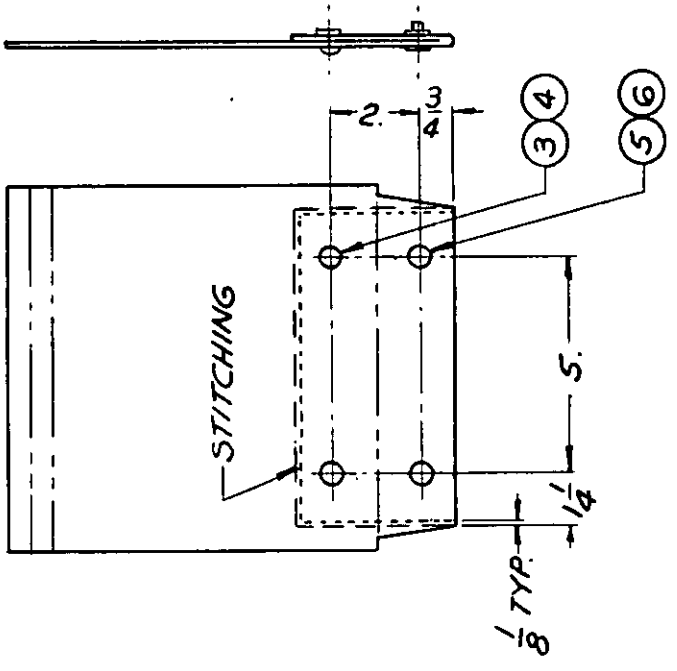

SPECIFICATIONS:
SEE FIG. 112

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

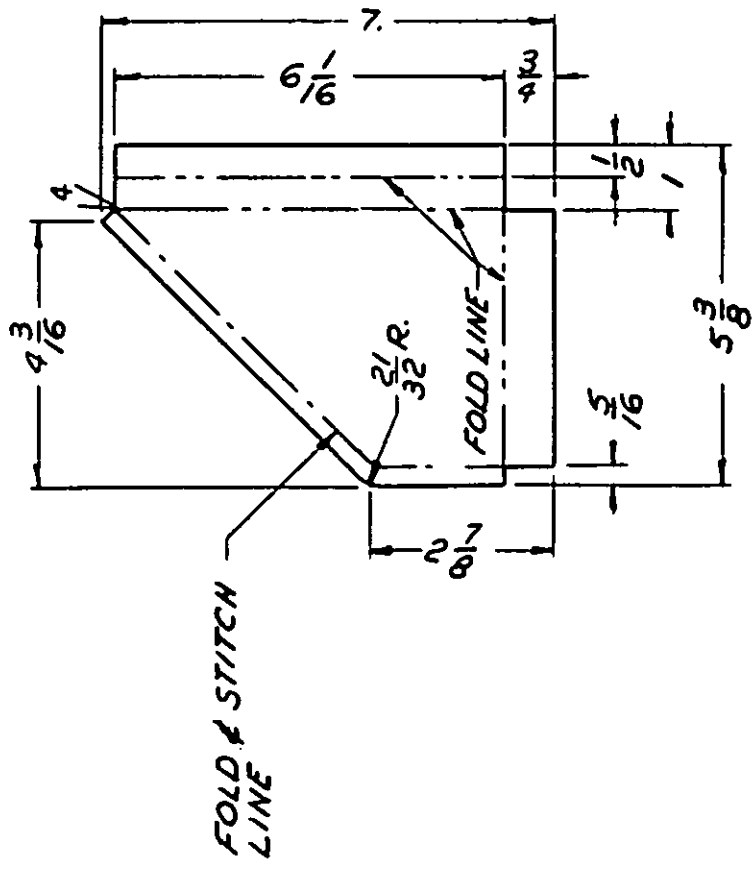


FIGURE 115
COVER SECTION - SIDE

SPECIFICATIONS:
SEE FIG 112

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

PARTS LIST - VENTILATOR FRAME

ITEM NO.	FIG NO	PART NAME	REQ'D.
1	118	FRAME	1
2	119	ROD	4

SPECIFICATIONS:

MATERIAL NOTE

I STEEL-CARBON FS1010 THRU FS1020
SPEC. QQ-S-633
3/16 DIA.

WELDING NOTE - STEEL

I WELD IN ACCORDANCE WITH
SPEC. MIL-STD-1261
ELECTRODE
SPEC. MIL-E-15599

PROTECTIVE FINISH NOTE:

I BASE PHOSPHATE
IN ACCOPDANCE WITH
SPEC. TT-C-490
PRIME IN ACCORDANCE WITH
SPEC. TT-P-636
ENAMEL SEMI-GLOSS COLOR O.D.
CLASS A OR B
SPEC. TT-E-529 OR TT-E-485

FIGURE 116

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

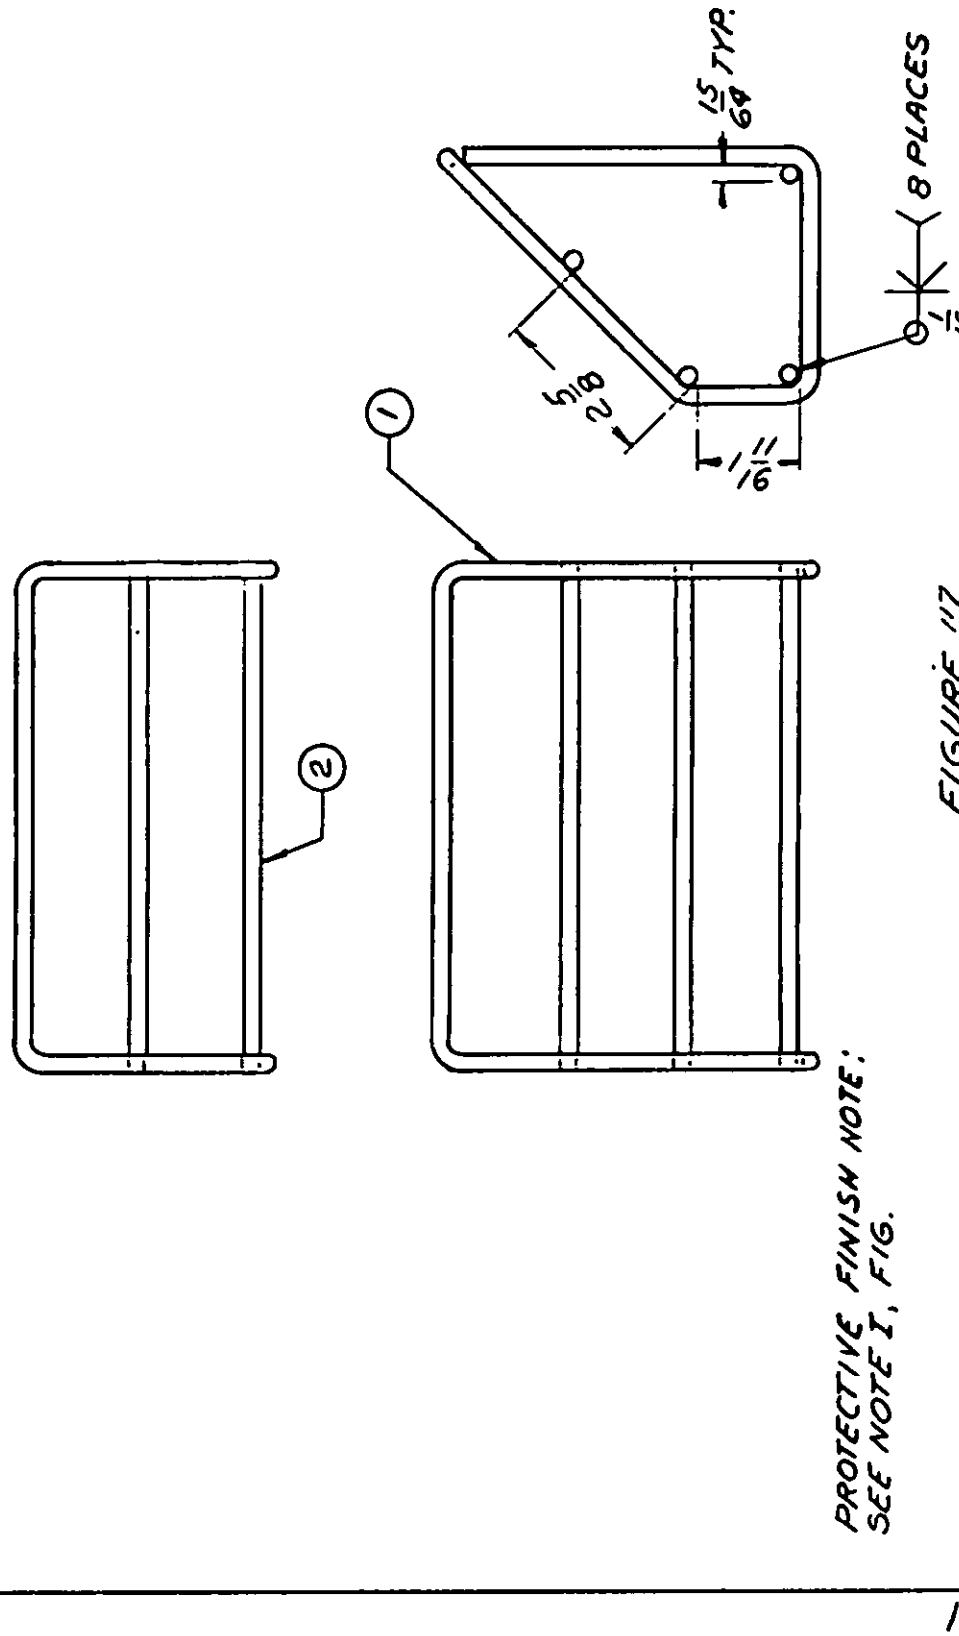


FIGURE 117
VENTILATOR FRAME

PROTECTIVE FINISH NOTE:
SEE NOTE I, FIG.

WELDING NOTE:
SEE NOTE I, FIG. 116

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T02:31Z
Check the source to verify that this is the current version before use.

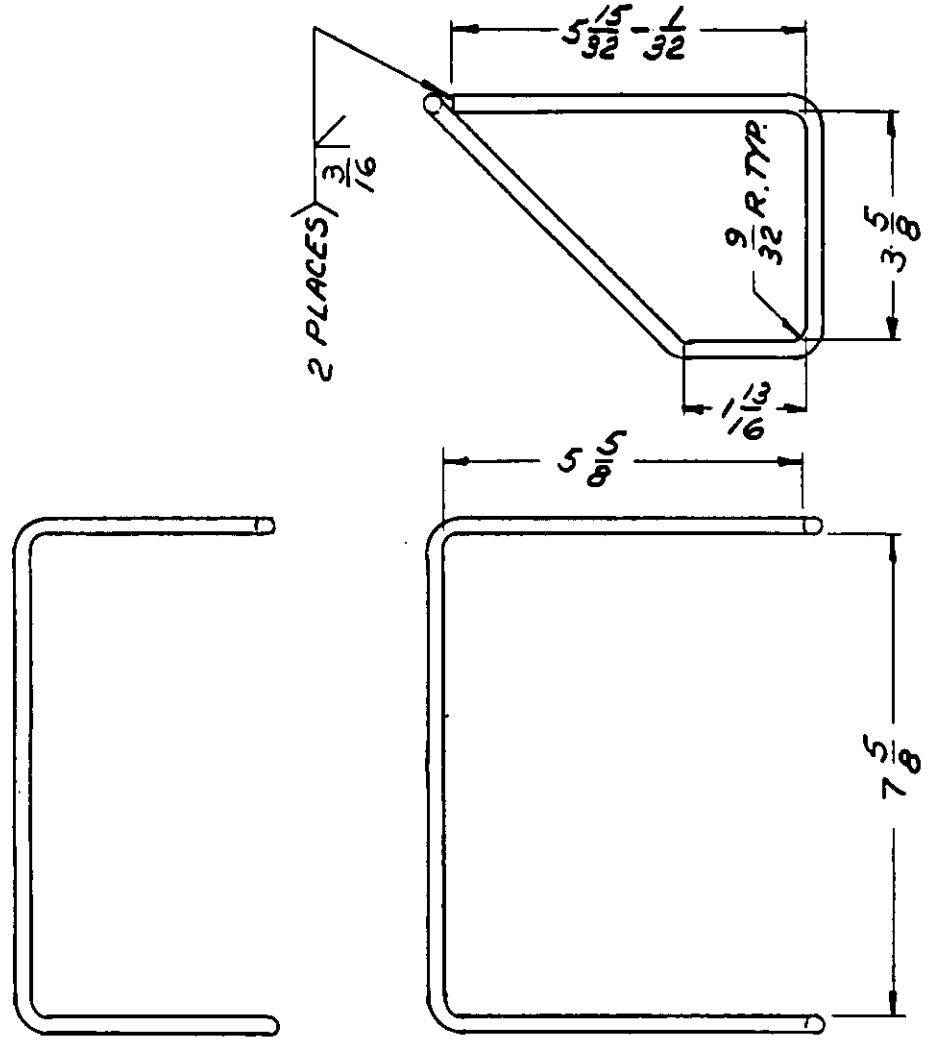


FIGURE 118
FRAME

WELDING NOTE:
SEE NOTE I, FIG. 116

MATERIAL NOTE:
SEE NOTE I, FIG 116

Source: https://assist.dla.mil -- Downloaded: 202610-22T02:31Z
Check the source to verify that this is the current version before use.

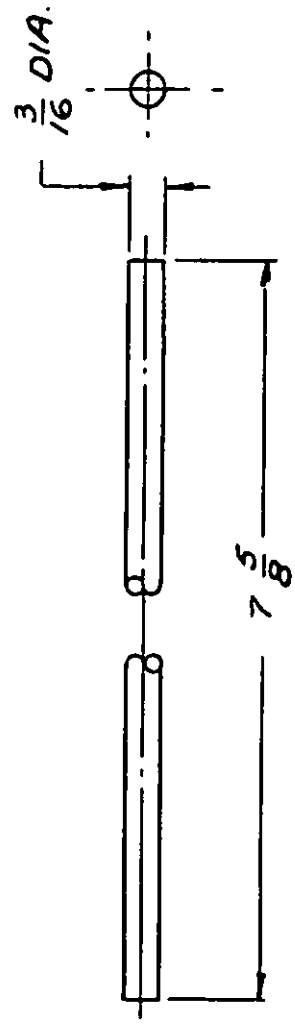


FIGURE 119
ROD

MATERIAL NOTE:
SEE NOTE 1, FIG 116

Source: https://assist.dla.mil -- Downloaded: 202640-22T02:31Z
Check the source to verify that this is the current version before use.