
NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.



PERFORMANCE SPECIFICATION SHEET

SWITCH, SENSITIVE, SPDT, LOW LEVEL TO 2 AMPS, 400°F, UNSEALED

This complete requirements for procuring the switches described herein shall consist of this document and the issue in effect of Specification MIL-S-8805.

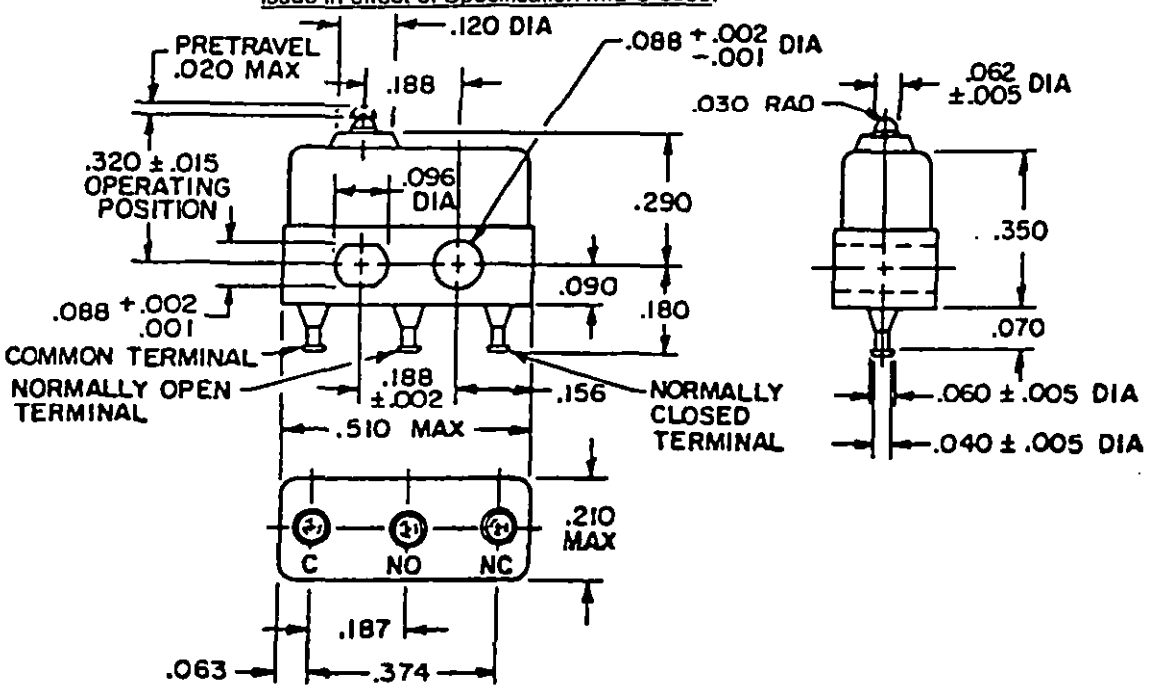


| INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|---|---|---|
| .001 | .03 | .030 | .76 | .070 | 1.78 | .156 | 3.96 | .290 | 7.37 |
| .002 | .05 | .040 | 1.02 | .088 | 2.24 | .180 | 4.57 | .320 | 8.13 |
| .005 | .13 | .060 | 1.52 | .090 | 2.29 | .187 | 4.75 | .350 | 8.89 |
| .015 | .38 | .062 | 1.57 | .096 | 2.44 | .188 | 4.78 | .374 | 9.50 |
| .020 | .51 | .063 | 1.60 | .120 | 3.05 | .210 | 5.33 | .510 | 12.95 |

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is =.010.
3. Mounting holes will accept pins or screws of .087 maximum diameter on .188 ±.022 centers.
4. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

FSC 5930



Source: https://assist.dla.mil - Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

| | |
|---|---|
| Dimensions and configurations: | See Figure |
| Enclosure design: | 1 (unsealed) |
| Temperature characteristics: | -55°C to 205°C |
| Shock type: | 100 G per MIL-STD-202, Method 213, Test Condition C |
| Vibration grade: | 2 (10-2,000 cps) |
| Weight: | .003 pounds maximum |
| Operating Characteristics: | 20% variation from specified values are acceptable after endurance tests. |
| Actuating force: | 5 ounces maximum |
| Release force: | 1 ounce mimimum |
| Pretravel: | .020 inch maximum |
| Overtravel: | .004 inch minimum |
| Movement Differential: | .002 inch maximum |
| Terminals: | Terminal finish may be .000050 inch maximum gold plate |
| Dielectric withstanding voltage: | 1,000 Vrms at sea level<br>400 Vrms at 50,000 feet<br>In the qualification inspection table after electrical endurance, the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable. |
| Mechanical endurance: | 100,000 cycles |
| Electrical endurance: | 100,000 cycles |
| Minimum current: | Not applicable |
| Low Level circuit (-02 only): | 100,000 cycles |
| Electrical ratings: | See Table I |
| Part Number: | See Table I |

TABLE I - Electrical Ratings and Part Numbers

| Load at 28VDC-Sea Level | Part Number M8805/- | |
|---|---|---|
| | -01 | -02 |
| Resistive | 2.0 | 1.0 |
| Inductive | 1.0 | 0.5 |
| Lamp | 0.25 | --- |



Source: https://assist.dla.mil -- Downloaded: 20260-17T11:22Z
Check the source to verify that this is the current version before use.

Qualification:

Group Submission: Per Table II

Group A inspection: Do not exceed low level electrical ratings during any testing of -02.

TABLE II - Group Submission Qualification Inspection

| Switches for Testing | Number of Sample Units | Examination or Test |
|---|---|---|
| M8805/106-01 | 18 | Qualification Inspection Table of MIL-S-8805 |
| M8805/106-02 | 6 | Group I, VII, and X of MIL-S-8805 Qualification Inspection Table |

Application note: Environmental contamination in the application can adversely affect the ability of the -02 switch to provide consistent performance on low level loads. Protection from environmental contamination can be accomplished by providing an appropriately sealed enclosure.

Custodian:

Air Force - 85

Preparing Activity:

Air Force - 85

Review Activities:

Air Force - 11, 99

(Project 5930-F518)



Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

## STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-S-8805/106(USAF), 16 Jan 80

*NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER*

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 78 1426 PREVIOUS EDITION WILL BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AFALD/PTES-Stdn
WPAFB, OH 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.