INCH-POUND
MIL-PRF-8805/106D
4 July 2024


SUPERSEDING
MIL-PRF-8805/106C
19 November 2018

PERFORMANCE SPECIFICATION SHEET

SWITCHES, SENSITIVE, SPDT, LOW LEVEL TO 2 AMPERES, 400 Degrees F, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this document and MIL-PRF-8805.

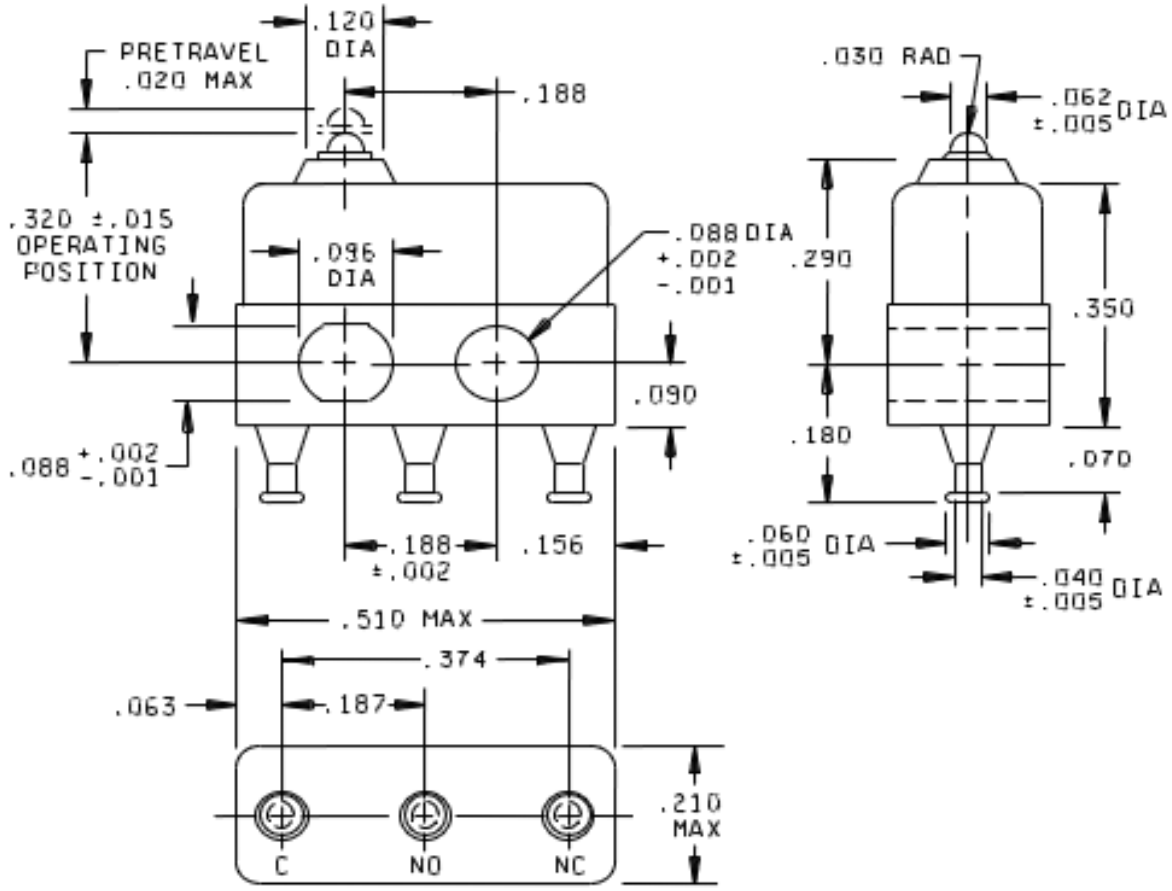

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ± .010.
3. Mounting holes will accept pins or screws of .087 maximum diameter on .188 ± .002 centers.

FIGURE 1. Configuration and dimensions.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Enclosure design: 1 (unsealed).

Temperature characteristics: 1 (- 55°C to + 205°C).

Shock type: 100 g, in accordance with MIL-STD-202-213, test condition C.

Vibration grade: 2 (10-2,000 cps)

Weight: .003 pounds maximum.

Operating characteristics: 20 percent variation from specified values are acceptable after endurance test.

Actuating force: 5 ounces maximum.

Release force: 1 ounce minimum.

Pretravel: .020 inch maximum.

Overtravel: .004 inch minimum.

Movement differential: .002 inch maximum.

Terminals: Terminal finish may be .000050 inch maximum gold plate.

Dielectric withstanding voltage:

1,000 V rms at sea level.

400 V rms at 50,000 feet.

In the qualification inspection table after electrical endurance, the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable. (See table II)

Mechanical endurance: 100,000 cycles.

Electrical endurance: 100,000 cycles.

Minimum current: Not applicable.

Low level circuit (M8805/106-02 only): 100,000 cycles.

Electrical ratings: See table I.

Part or Identifying Number (PIN): See table I.

TABLE I. Electrical ratings and PIN's

Load	PIN M8805/106-	
Sea level, 28 V dc	01	02
	Amperes	Amperes
Resistive	2.0	1.0
Inductive	1.0	0.5
Lamp	0.25	-------

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.

Qualification:

Group submission: See table II.

Group A inspection: Do not exceed low level electrical ratings during any testing of M8805/106-02.

TABLE II. Group submission qualification inspection.

PIN'S	Number of sample units	Examination or test
M8805/106-01	18	Qualification inspection table of MIL-PRF-8805
M8805/106-02	6	Group I, VII, and X of MIL-PRF-8805 qualification inspection table

Application note: Environmental contamination in the application can adversely affect the ability of the M8805/106 -02 switch to provide consistent performance on low level loads. Protection from environmental contamination can be accomplished by providing an appropriately sealed enclosure.

Referenced documents.

MIL-PRF-8805 MIL-STD-202-213

The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Navy - EC
Air Force - 85
DLA – CC

Preparing activity
DLA – CC

(Project 5930-2024-042)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:21Z
Check the source to verify that this is the current version before use.