

MILITARY SPECIFICATION SHEET

SWITCHES, PUSH, MOMENTARY AND PUSH-PULL, 10 AMPERES, DUSTTIGHT

This specification sheet is approved for use within the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-8805.

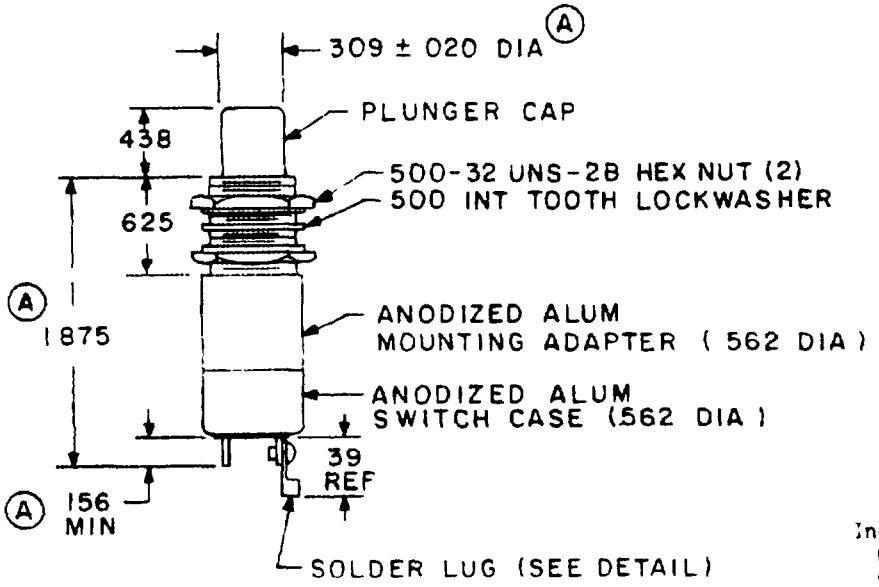



SOLDER LUG DETAIL

Inches	mm
020	51
089	2 26
094	2 39
156	3 96
187	4 75
203	5 16
.375	9 52
39	9 9
438	11 13
500	12.70
562	14 27
1 875	47 63


NOTES.
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 010 (0 25 mm)
4. All terminal threads are 086-56UNC-2B
5. Hardware for each terminal includes one screw, one terminal lug and one lockwasher
A 6. See figure 2 for mounting hardware detail


A FIGURE 1 Basic switch with mounting adapter

A denotes changes


DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

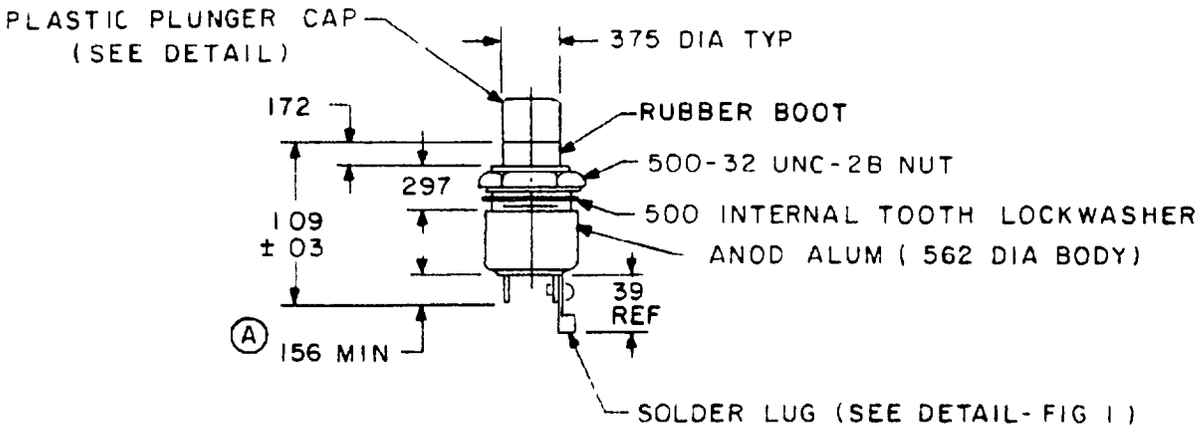

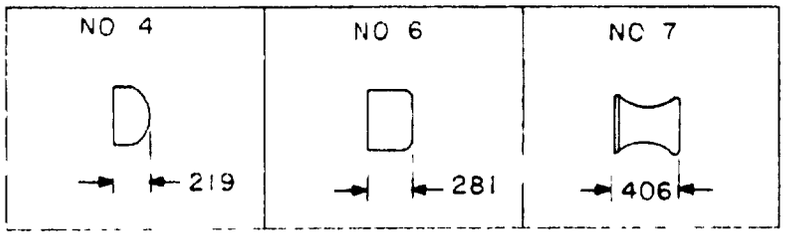

PLUNGER CAP STYLES

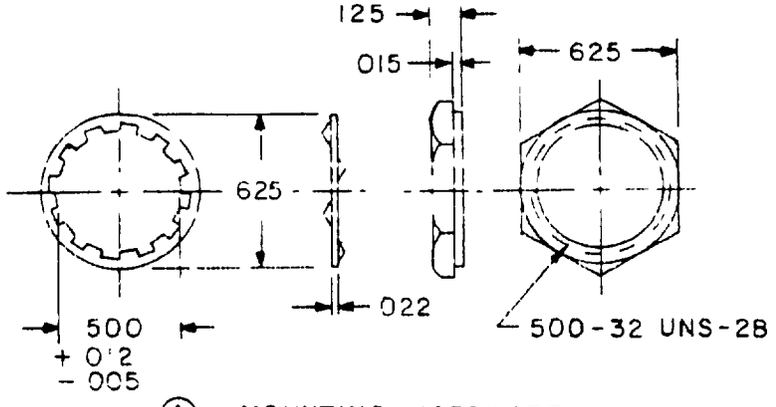

Ⓐ MOUNTING HARDWARE

Inches	mm
005	13
012	30
015	38
022	56
03	3 18
125	3 96
156	0 8
172	4 37
219	5 56
281	7.14
297	7 54
375	9.52
39	9 9
406	10 31
500	12 70
562	14 27
625	15 88
1 09	27 7

NOTES
1. Dimensions are in inche
2. Metric equivalents are given for general information only
3. Unless otherwise specified, tolerance is ± 010 (0 25 mm)
4. All terminal threads are 086-56UNC-2B
5. Hardware for each terminal includes one screw, one terminal lug and one lockwasher

(Figure 1 ... base ... with ... mounting hardware)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

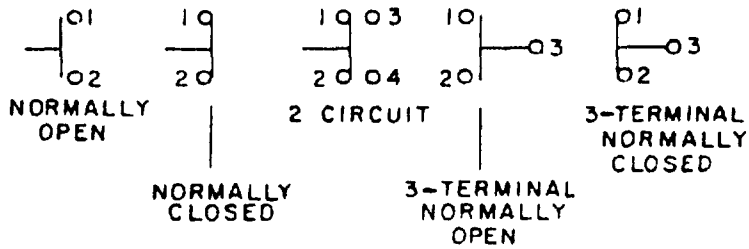


FIGURE 3. Circuit schematic.

TABLE II. Circuit code.

Code	Circuit schematic (see figure 3)
1	Normally open
2	Normally closed
3	Two-circuit
4	Three-terminal normally open
5	Three-terminal normally closed

TABLE III. Plunger cap and action code.

Code	Item	Action	Plunger cap color
04B	1/ Basic switch only, cap style 4	Momentary	Black
04R	1/ Basic switch only, cap style 4	Momentary	Red
04W	1/ Basic switch only, cap style 4	Momentary	White
06B	1/ Basic switch only, cap style 6	Momentary	Black
06R	1/ Basic switch only, cap style 6	Momentary	Red
06W	1/ Basic switch only, cap style 6	Momentary	White
07B	1/ Basic switch only, cap style 7	Push-pull	Black
07R	1/ Basic switch only, cap style 7	Push-pull	Red
07W	1/ Basic switch only, cap style 7	Push-pull	White
L5C	Basic switch with adapter	Momentary	Chrome
L5R	Basic switch with adapter	Momentary	Red
L5B	Basic switch with adapter	Momentary	Black

1/ Use of switches without mounting adapters is not recommended for applications where side force on button is anticipated. See MIL-S-8805/3 for additional styles of switches with mounting adapters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

JALIFICATION Qualification will be granted on the basis of similarity when
imilar items, with mounting adapters, are qualified to MIL-S-8805/3.

istodian
Air Force - 85

view activities
Air Force - 99
DLA - ES

Preparing activity
Air Force - 85

Agent
DLA - ES

(Project 5930-F607)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction

Dimensions and configurations. See figures 1, 2, and 3.

Enclosure design. 2 (Dusttight).

Temperature characteristic. 1 (-55°C to +85°C).

Shock type M (100 g, test condition I, method 213 of MIL-STD-202).

Vibration grade. 2 (10 to 2,000 Hz).

Weight (switches with adapter): .050 pound maximum.

Material:

Case and adapter: Aluminum alloy, 2011-T3, per QQ-A-225.

Finish. Anodized per MIL-A-8625, type II.

(A) Plunger cap (switches without adapter) Nylon in accordance with L-P-410. May be flame retardant glass-filled nylon.

(A) Plunger cap (switches with adapter): Aluminum alloy 2011-T3 per QQ-A-215, black or red finish anodized per MIL-A-8625 type II, or chrome plated brass per ASTM B16 (see table III).

Body: Flame resistant diallyl phthalate which meets the requirements of MIL-M-14.

Operating characteristics

Operating force

Momentary 4 ±1 pounds.

Push-pull 1/2 to 2 pounds.

Releasing force 1 pound minimum, momentary.

Total plunger travel

Switches without adapter .085 ±.015 inch.

Switches with adapter. .438 inch (approximate).

Overtravel

Switches with adapter .312 inch (approximate).

Electrical ratings

Center terminal (terminal 3, on 3-terminal switches) 3 amperes maximum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

Other than center terminal See table I.

TABLE I. Electrical ratings.

Load	Sea level		50,000 feet
	28 V dc	115 V ac, 60/400 Hz	28 V dc
	Amperes	Amperes	Amperes
Resistive	10	10	---
Inductive	5	5	5
Lamp	3	3	---

Terminal strength (torque) Not applicable.

Strength of actuator and stop 75 pounds for 3-terminal circuitry or 40 pounds for all others.

Dielectric withstanding voltage

At sea level 1,000 V rms

After electrical endurance 200 V rms.

Minimum current (prior to test, switches shall be preconditioned at 85°C for 48 hours)

Circuit schematics 1, 2, and 3 200,000 cycles

Circuit schematics 4 and 5 50,000 cycles.

Mechanical endurance rate 5 cpm

Circuit schematics 1, 2, and 3

At room temperature 200,000 cycles.

At -55°C and +85°C 100,000 cycles each temperature.

Circuit schematics 4 and 5 50,000 cycles.

Electrical endurance

At sea level 25,000 cycles.

At 50,000 feet 5,000 cycles.

Sand and dust Applicable.

Part numbers Part numbers are assigned as follows

Example

M8805/107- 1 04R

- Specification sheet number
- Circuit code (see table II)
- Plunger cap and action code

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.