NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND

MIL-PRF-8805/109A(EC)
12 February 1992


SUPERSEDING
MIL-S-8805/109(EC)
1 June 1982

PERFORMANCE SPECIFICATION SHEET

Ⓐ SWITCHES, SENSITIVE, SPDT, UNSEALED, 7 AMPERES, 0.156 WIDTH BASE

This specification sheet is approved for use within the Space and Naval Warfare Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

This requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-S-8805.

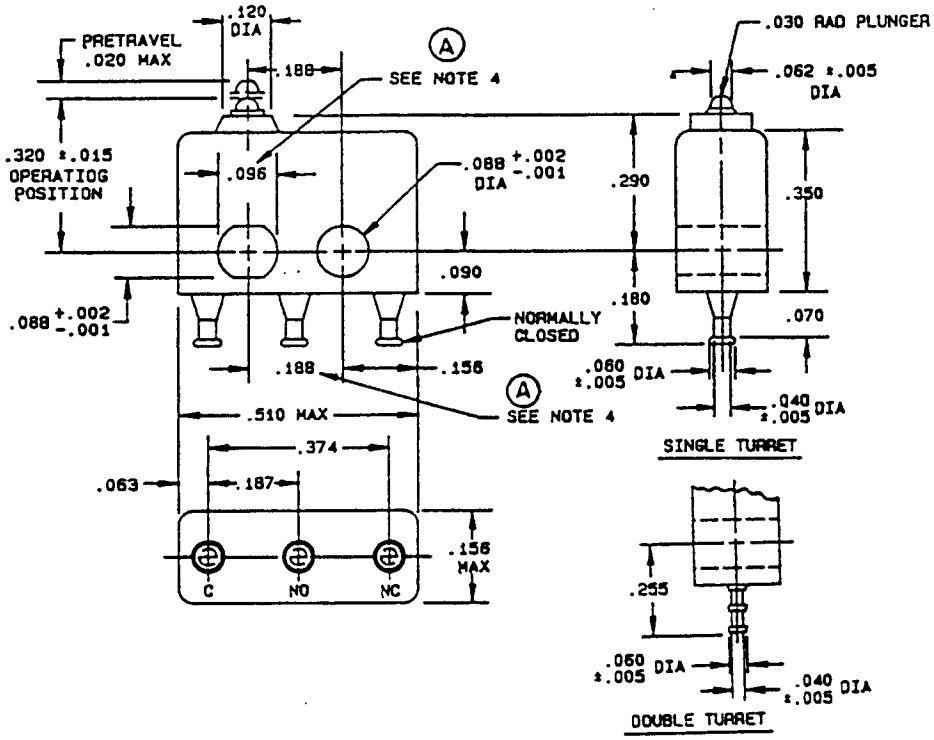

INCHES	MM
.001	.03
.002	.05
.005	.13
.010	.25
.015	.38
.020	.51
.030	.76
.040	1.02
.060	1.52
.062	1.57
.063	1.60
.070	1.78
.087	2.21
.088	2.24
.090	2.29
.096	2.44
.120	3.05
.156	3.96
.180	4.57
.187	4.75
.188	4.78
.255	6.48
.290	7.37
.320	8.13
.350	8.89
.374	9.50
.510	12.95

NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerance is ±.010.
2. Metric equivalents are given for general information only.
Ⓐ4. Mounting holes will accept pins or screws of .087 maximum diameter on .188 ±.002 centers.
5. Double turret terminals shall accept two AN-20 wires.

Ⓐ FIGURE 1. Dimensions and configurations.

Ⓐ denotes changes

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration See figure 1.

Enclosure design 1 (unsealed).

Temperature characteristics: 1 (-55° to +85°C).

Shock type: M (100 g).

Vibration grade. 1 (10 to 500 Hz)

Weight: .003 pound maximum

Operating characteristics

  Actuating force 5 ounces maximum

  Releasing force· 1 ounce minimum

  Movement differential .005 inch maximum.

  Pretravel: 020 inch maximum

  Overtravel .004 inch minimum.

(A) Material:

  Terminals Terminal finish may be 000030 inch minimum to 000100 inch maximum thick gold plate.

Terminal strength· 5 pounds, all directions

Mechanical endurance 50,000 cycles at 004 +.001, -.000 inch overtravel

Dielectric withstanding voltage·

  Sea level: 1050 V rms

  Altitude (50,000 ft): 400 V rms

Electrical endurance: 25,000 cycles.

Electrical ratings: See tables I and II.

Low level circuit: 25,000 cycles, applicable to switches with gold contacts (PIN's M8805/109-03 and 04).

(A) Intermediate current· 25,000 cycles.

(A) Part or Identifying Number (PIN) M8805/109-(dash number from table III).

Qualification:

  Group submission· See table IV

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings - silver contacts.

Load	Sea level		50,000 feet
	28 V dc	115 V ac, 60 Hz	28 V dc
	(amperes)	(amperes)	(amperes)
Resistive- - -	7	7	4
Inductive- - -	4	7	2.5
Lamp - - - - -	2.5	2	2.5

TABLE II Electrical ratings - gold contacts.

Load	Sea level 28 V dc	50,000 feet 28 V dc
	(amperes)	(amperes)
Resistive - - - -	1	1
Inductive - - - -	5	.5

TABLE III Dash numbers

Dash number	Contact material	Terminals
01	Silver	Single turret
02	Silver	Double turret
03	Gold	Single turret
04	Gold	Double turret

TABLE IV. Qualification inspection.

Dash number	Inspection	Extent of approval
-02	Qualification inspection table of MIL-S-8805	All dash numbers
-03 (10 sample units)	Groups I, VII, and X of qualification inspection table	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-N716)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.