INCH-POUND
MIL-PRF-8805/110G
3 June 2026
SUPERSEDING
MIL-PRF-8805/110F
13 May 2021

PERFORMANCE SPECIFICATION SHEET

SWITCHES, PUSHBUTTON, MOMENTARY, 5 AMPERES AND LOW LEVEL, MINIATURE, DUSTTIGHT OR WATERTIGHT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-PRF-8805.

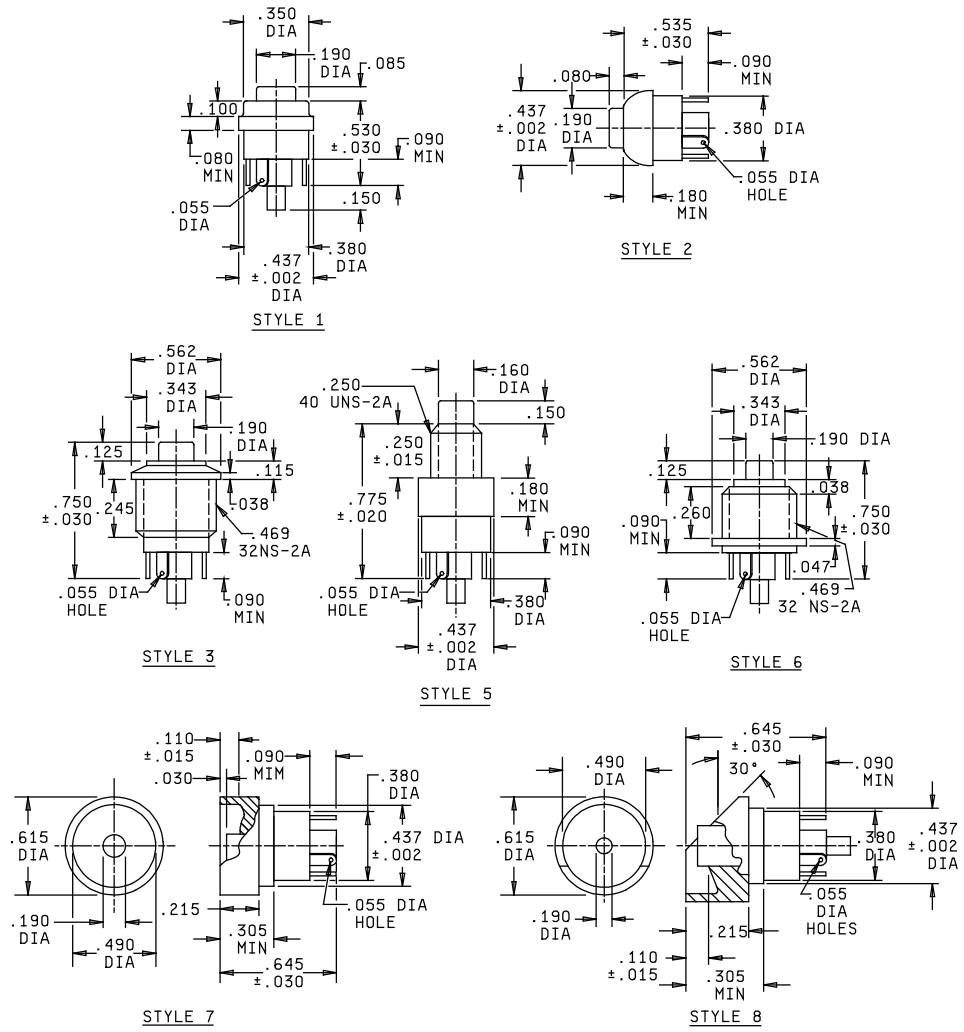


FIGURE 1. Configuration and dimensions.


AMSC N/A
FSC 5930
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.


NOTES:
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.015.
3. DELETED
4. Styles 3, 5, and 6 are panel mounted.
5. Mounting thread .469-32NS-02A applies to styles 3 and 6, and shall be furnished with one each mounting nut MS25082-B21 per MS25082 or equivalent and lockwasher MS35333-126 per NASM 35333 or equivalent. Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for hardware material.
6. Mounting thread .250-40UNS-2A applies to style 5, and shall be furnished with one each mounting nut MS25082-B14 per MS25082 or equivalent and lockwasher MS35333-135 per NASM 35333 or equivalent. Alternative base metals and protective finishes, as approved by the qualifying activity, may be utilized for hardware material.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

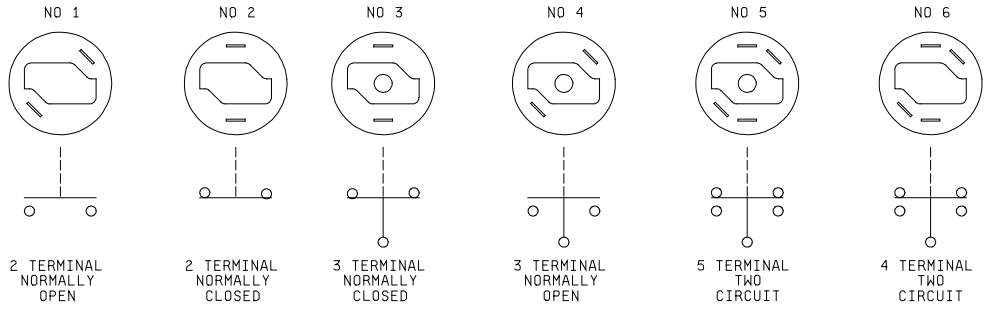

TERMINAL CONFIGURATION AND CIRCUIT SCHEMATIC

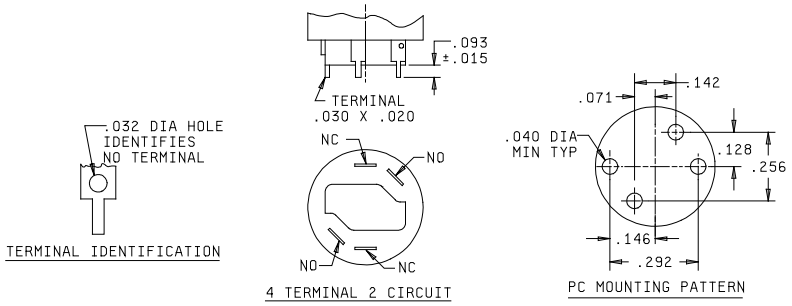

FOR SOLDER TERMINATION

Normally open (N.O.): Round ended terminal
Normally closed (N.C.): Square ended terminal

FOR PRINTED CIRCUIT (PC) TERMINATION

NOTES:
1. Dimensions are in inches.
2. DELETED.
3. Unless otherwise specified, tolerances are ±.015.
4. For solder termination, all circuit schematics are available.
5. For PC termination, circuit schematics 1, 2, and 6 are available.

FIGURE 2. Terminal configuration.

.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figures 1 and 2.

Enclosure design: 2 (dusttight) or 3 (watertight).

Temperature characteristic: 1 (-55° to +85°C).

Shock type: M (100 g's).

Vibration grade: 2 (10 Hz to 2,000 Hz).

Weight: .030 pound maximum.

Dielectric withstanding voltage: 1,050 V rms.

After electrical endurance: Between all terminals and mounting plate only.

Operating characteristics:

Actuating force: 27 ±8 ounces, 20 percent variation from specified values acceptable after test.

Total travel: .080 inch maximum.

Strength of actuator: 10 pounds.

Sand and dust: Applicable.

Terminal strength: 5 pounds, all directions.

Mechanical endurance: 2,000,000 cycles.

Electrical endurance: 50,000 cycles. Electrical ratings, see table I.

TABLE I. Electrical ratings.
Circuit schematics 1, 2, and 6

Load	Sea level				50,000 feet			
	28 V dc		115 V ac, 60 Hz		28 V dc		115 V ac, 60 Hz	
	NO or NC	2 circuit 1/	NO or NC	2 circuit 1/	NO or NC	2 circuit 1/	NO or NC	2 circuit 1/
	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)
Resistive	5	4	5	4	5	4	5	4
Inductive	3	2	3	2	3	2	3	2
Motor	3	---	3	---	---	---	---	---
Lamp	1	---	1	---	---	---	---	---

1/ Independent loads connected to each throw.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical ratings.
Circuit schematics 3, 4, and 5

Load	Sea level				50,000 feet			
	28 V dc		115 V ac, 60 Hz		28 V dc		115 V ac, 60 Hz	
	NO or NC	2 circuit 1/	NO or NC	2 circuit 1/	NO or NC	2 circuit 1/	NO or NC	2 circuit 1/
	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)	(amperes)
Resistive	2.5	2	2.5	2	2.5	2	2.5	2
Inductive	1.5	1	1.5	1	1.5	1	1.5	1
Motor	1.5	---	1.5	---	---	---	---	---
Lamp	.5	---	.5	---	---	---	---	---

1/ Independent loads connected to each throw.

Intermediate current: Applicable 50,000 cycles.

Low level circuit: 25,000 cycles (applicable when specified, see table III).

Logic level circuit: Applicable to electrical rating codes 4, 5, 6, and 8 (see table III).

Part or Identifying Number (PIN): See table III.

TABLE III. PIN number and characteristics.

Case style 1/	Terminal type/ 2/ electrical rating and seal	Circuit schematic 3/ 4/	Button color
1. Style 1	1. Solder/power circuit/dusttight	1. 2 Term N.O.	1. Red
2. Style 2	2. Solder/power circuit/watertight	2. 2 Term N.C.	2. Black
3. Style 3	3. PC/power circuit/dusttight 5/	3. 3 Term N.C.	3. Orange
5. Style 5	4. Solder/low level/dusttight	4. 3 Term N.O.	4. Yellow
6. Style 6	5. Solder/low level/watertight	5. 5 Term two ckt	5. Green
7. Style 7	6. PC/low level/dusttight 5/	6. 4 Term two ckt	6. Blue
8. Style 8	7. PC/power circuit/watertight 5/		7. Violet
	8. PC/low level/watertight 5/		8. Gray
			9. White

1/ See figure 1 for case styles.
2/ For group A and incoming inspection, low level switches shall not be subjected to loads greater than 10 milliamperes at an open circuit voltage of 30 millivolts maximum dc or peak ac.
3/ See figure 2 for circuit schematic identification.
4/ Printed circuit board termination applies to circuit schematics 1, 2, and 6 only.
5/ Not available in circuit schematics 3, 4, and 5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.

PIN:

Specification sheet number	Dash number			
M8805/110-	7	4	1	2
	Case Style	Terminal type/ Electrical rating	Circuit schematic	Button color

Example:

M8805/110-7412 designates a switch of case style 7, with solder termination, low level electrical rating, that is dusttight and has a 2 terminal normally open circuit and a black button.

TABLE IV. Qualification inspection.

Inspection	Basic switch	Other switch samples	Extent of approval	
Qualification inspection table of MIL-PRF-8805	Required sample units of the 4 terminal two circuit configuration	Required number of sample units of 3 terminal N.O. or 3 terminal N.C. (groups VII and X tests, qualification inspection table, MIL-PRF-8805)	All	In addition, 2 sample units of each of the other configurations shown on this specification sheet shall be submitted to visual and mechanical inspection.

Referenced Documents:

MIL-PRF-8805
MS25082
NASM 35333

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where modifications from this revision were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Custodian:
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5930-2026-051)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/ .

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:22Z
Check the source to verify that this is the current version before use.