
NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

PERFORMANCE SPECIFICATION SHEET

SWITCH ASSEMBLIES, SENSITIVE, TRIGGER,
7 AMPERES, UNSEALED

This specification is approved for use by all Departments and Agencies of the Department of Defense.


This complete requirements for acquiring the switches described herein shall consist of this specification sheet and the latest issue of MIL-S-8805.

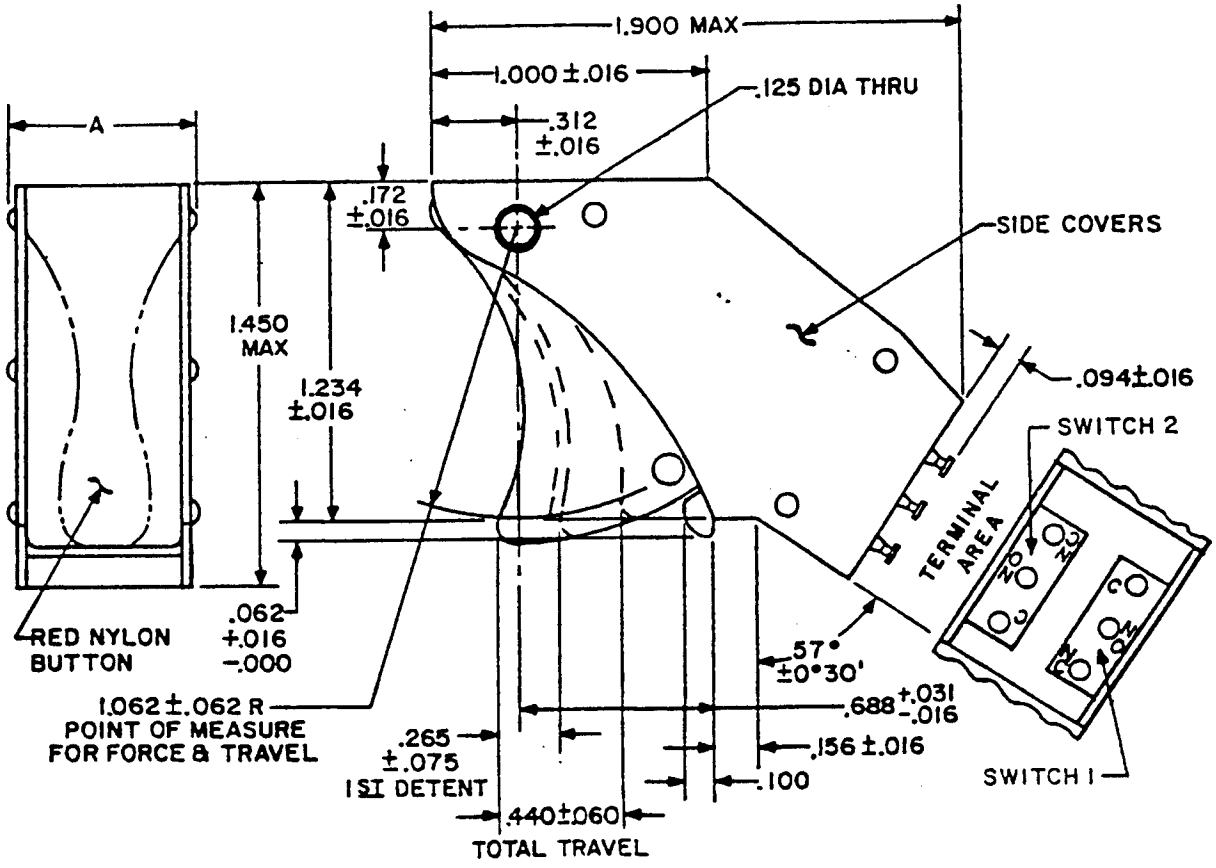

Type	Dimension A	Side cover material
Type I Type II	.641 ± .016 .762 + .000 - .025	Aluminum (black anodized) Polyester (color: black)

FIGURE 1. Dimensions and configurations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

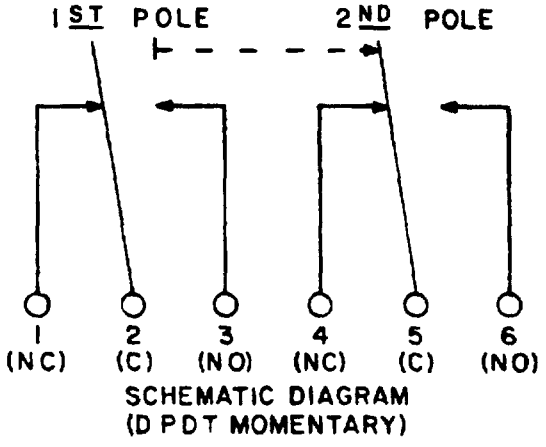

SCHEMATIC DIAGRAM
(DPDT MOMENTARY)

1st POLE MAKES WITH PARTIAL DEPRESSING OF TRIGGER.
2nd POLE MAKES BY DEPRESSING TRIGGER THROUGH DETENT
TO FULL "IN" POSITION.

INCHES	MM	INCHES	MM	INCHES	MM
.016	.41	.100	2.54	.641	16.28
.025	.63	.125	3.18	.688	17.48
.031	.79	.156	3.96	.762	19.35
.060	1.52	.172	4 37	1.000	25.40
.062	1.57	.265	6.73	1.062	26.97
.075	1.90	.312	7.92	1.234	31.34
.094	2.39	.440	11.18	1.450	36.83
				1.900	48.26

NOTES.
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. The terminal designation shall be permanently marked.
4. Unless otherwise specified, tolerance is ±.010 (.25 mm).

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

Dimensions and configurations. See figure 1.

Enclosure design. 1 (Unsealed).

Temperature characteristic. 1 (-55°C to +85°C).

Shock type: M(100g).

Vibration grade: 2 (10-2,000 Hz).

Weight 0.8 ounce max.

Dielectric withstanding voltage.

Sea level: 1,050 V rms.

Altitude (80,000 ft) 400 V rms. After electrical endurance, the dielectric withstanding voltage points of application between all unconnected terminals of the same pole is not applicable.

Operating characteristics:

Operating force: The actuating force measured at the bottom of the trigger shall be 2.250 ±.500 pounds to make the first pole; 6.500 ±.750 pounds shall be required to pass through the detent, and 6, +0, -3 pounds to continue travel after the detent.

Releasing force. 0.75 pound minimum.

Actuating travel.

Switch 1

Pretravel .130 inch minimum from full out.

Overtravel .015 inch minimum before first detent.

Switch 2:

Pretravel .020 inch minimum beyond first detent.

Overtravel .030 inch minimum before total travel.

Mechanical endurance: 100,000 cycles.

Electrical endurance: 50,000 cycles. After electrical endurance, the contact resistance shall not exceed 1 percent of the load resistance, using the electrical parameters of the electrical endurance test load.

Electrical ratings: See table I.

TABLE I. Electrical ratings.

Electrical ratings @ 28 V dc				
	Silver contacts		Gold contacts	
Load	Sea level	80,000 ft.	Sea level	80,000 ft.
	Amperes	Amperes	Amperes	Amperes
Resistive	7	4	1	1
Inductive	5	2.5	.5	.5

Intermediate current. 50,000 cycles. After minimum current cycling, the contact resistance shall not exceed 1 percent of the load resistance, using the electrical parameters of the minimum current test load.

Part number: M8805/111-(dash number from table II).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

TABLE II. Dash numbers.

Dash number	Contact material		Type
	Switch 1	Switch 2	
-01	Silver	Silver	I
-02	Gold	Silver	
-03	Gold	Gold	
-04	Silver	Silver	II
-05	Gold	Silver	
-06	Gold	Gold	

QUALIFICATION INSPECTION.

Group submission See table III. Table III applies provided that qualified MIL-S-8805/4 basic switches are utilized.

TABLE III. Qualification inspection.

Inspection	Switches for testing	Extent of qualification
Group I		All part numbers
Visual and mechanical examination	M8805/111-01 (all sample units)	
Operating characteristics	M8805/111-06 (all sample units)	
Group II		
Strength of actuating means		
Thermal shock		
Vibration	M8805/111-01 (4 sample units)	
Shock (specified pulse)	M8805/111-06 (4 sample units)	
Operating characteristics		
Dielectric withstanding voltage		
Visual and mechanical examination		
Group III		
Salt spray (corrosion)		
Visual and mechanical examination	M8805/111-01 (2 sample units)	
Group IV		
Contact resistance		
Low temperature operation		
Mechanical endurance at low temperature		
Mechanical endurance at high temperature	M8805/111-01 (4 sample units)	
Contact resistance		
Operating characteristics		
Dielectric withstanding voltage		
Visual and mechanical examination		
Group V		
Electrical endurance		
Altitude only	M8805/111-01 (4 sample units)	
Dielectric withstanding voltage	M8805/111-06 (4 sample units)	
Operating characteristics		
Group VI		
Intermediate current	M8805/111-01 (2 sample units)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

Custodians
Army - EA
Navy - EC
Air Force - 85

Review activities
Army - AV, MI
Navy - AS, OS
Air Force - 11, 17, 99

User activities:
Air Force - 82

Agent:
DLA - ES

Preparing activity
Navy - EC

(Project 5930-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems Enter in block 6 any remarks not related to a specific paragraph of the document If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commander
Naval Electronic Systems Command (ELEX 8111)
Washington, DC 20363

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1 DOCUMENT NUMBER	2 DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c. Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

DD FORM 1426 PREVIOUS EDITION IS OBSOLETE

(FOLD ALONG THIS LINE) (CUT ALONG THIS LINE) FORM