MILITARY SPECIFICATION SHEET

SWITCH, TOGGLE, SNAP ACTION, HERMETIC SEAL, LOW LEVEL TO 4 AMPERES, SPDT AND DPDT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the switches described herein shall consist of this specification and the latest issue of MIL-S-8805.


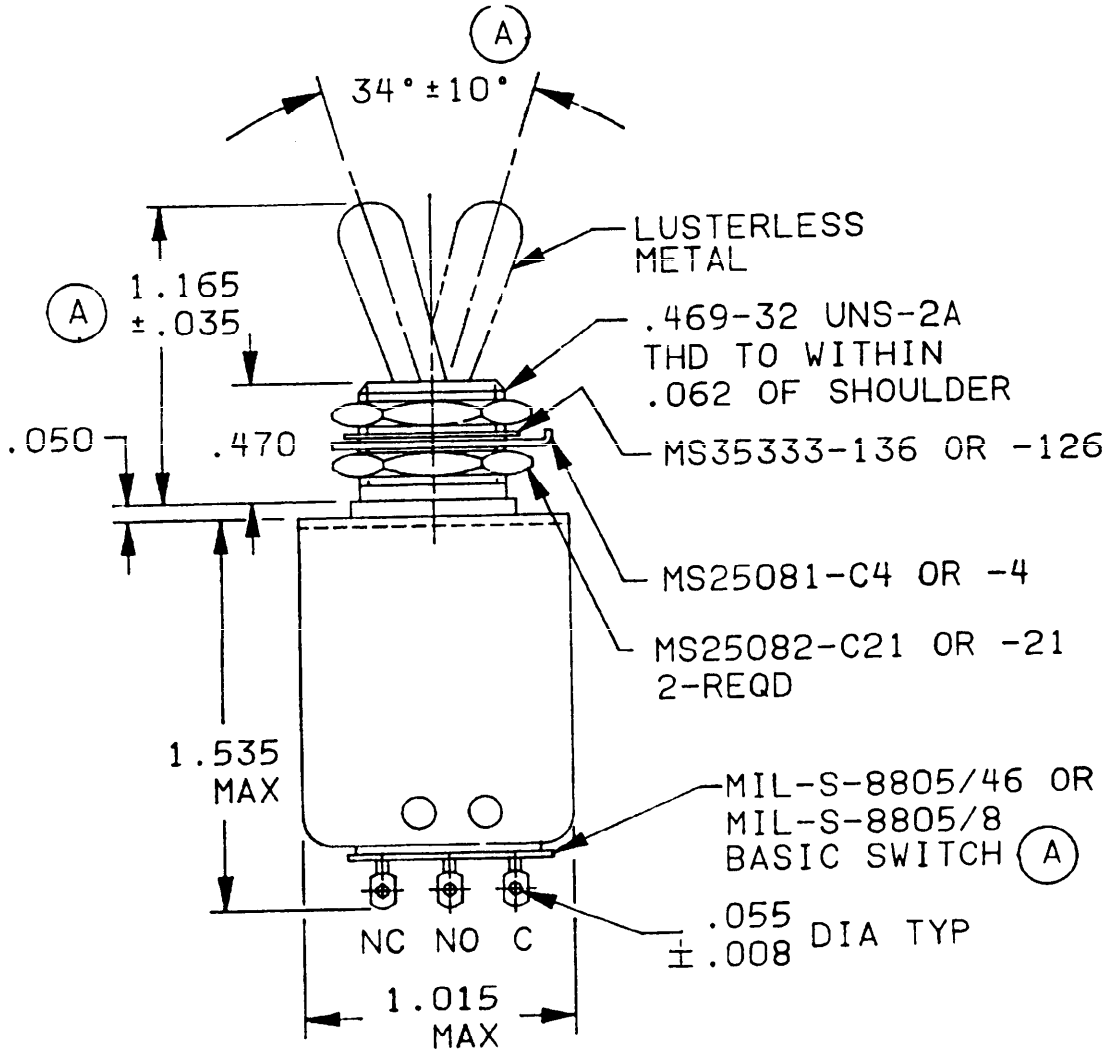


FIGURE 1. Dimensions and configurations.

(A) Denotes changes

Source: https://assist.dla.mil -- Downloaded: 202640-17T11:23Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

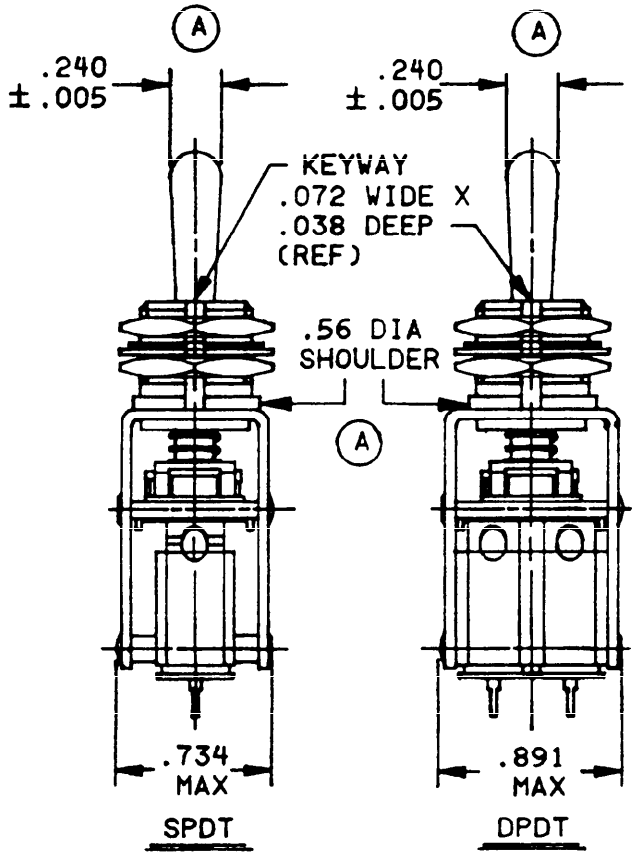

Inches	mm
.005	0.13
.008	0.20
.035	0.89
.038	0.97
.050	1.27
.055	1.40
.072	1.83
.240	6.10
.470	11.94
.56	14.22
.734	18.64
.891	22.63
1.015	25.78
1.165	29.59
1.535	38.99

Circuit closed with toggle level in

Opposite keyway side	center	keyway side
C-NC		C-NO
(maintained)	(none)	(maintained)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Configuration optional provided envelope dimensions specified are not exceeded.
(A) 4. Unless otherwise specified, tolerance is ±.015 (0.38 mm).

FIGURE 1. Dimensions and configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

(A) Enclosure design:

Toggle mechanism: 1 (unsealed) 1/.

Basic switch: 5 (hermetic).

Temperature characteristic:

(A) M8805/112-01, -03, -04 and -06: 2 (-65°C to +125°C).

M8805/112-02 and -05: 3 (Except maximum parameter shall be +260°C.)

Shock type: M (100 g's, test condition I, method 213 of MIL-STD-202).

Vibration grade: 2 (10 to 2,000 Hz).

Weight:

Single pole switches: .09 pound maximum.

Double pole switches: .13 pound maximum.

Operating characteristics:

Operating force:

Single pole switches: 2.5 to 3.5 pounds.

Double pole switches: 3.0 to 5.0 pounds.

(A) Coincidence of operating and release points: Within 5° of lever travel. Applicable to DPDT switch only.

Pretravel: 12° minimum lever travel before contact transfer.

Contact resistance:

MIL-S-8805/112-01, -02, -04 and -05: 125 milliohms maximum.

MIL-S-8805/112-03 and -06: 125 milliohms maximum initial, 1 ohm maximum after mechanical endurance.

Dielectric withstanding voltage:

Sea level: 1,000 V rms.

Low-level circuit: MIL-S-8805/112-03 and -06 only, 15,000 cycles.

Electrical and mechanical endurance: 15,000 cycles.

Short circuit: 90 amperes maximum.

Electrical ratings: See table I.

Military part number: See table III.

1/ For panel seal, use boot in accordance with MIL-B-5423/2 (part number M5423/02-01).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE I. Electrical ratings.

Part number	Load	Sea level	Sea level and 70,000 feet
		115 V ac, 400 Hz	29 V dc
		Amperes	Amperes
M8805/112 -01, -02, -04 and -05	Resistive	4	4
	Inductive	2	2
	Lamp	0.5	1
M8805/112 -03 and -06	Resistive	---	0.5
	Inductive	---	.25
	Lamp	---	---
	Low level circuit test applicable		

QUALIFICATION:

Ⓐ Group submission: See table II. Table II applies provided that qualified MIL-S-8805/46 or MIL-S-8805/8 basic switches are utilized.

TABLE II. Qualification inspection.

Inspection	Switches for testing	Extent of qualification
Group I		
Visual and mechanical examination Operating characteristics	M8805/112-05 (all sample units) M8805/112-03 (2 sample units)	
Group II		
Strength of actuating means Strength of mounting bushing Thermal shock Vibration Shock (specified pulse) Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	M8805/112-05 (4 sample units)	All part numbers
Group III		
Salt spray (corrosion) Visual and mechanical examination	M8805/112-05 (2 sample units)	
Group IV		
Contact resistance Mechanical endurance at low temperature Mechanical endurance at high temperature Contact resistance Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	M8805/112-05 (4 sample units)	
Group V		
Electrical endurance Sea level inductive load, dc Dielectric withstanding voltage Operating characteristics	M8805/112-05 (2 sample units)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

Ⓐ TABLE III. Military part numbers.

Military part number M8805/112	Switching characteristic	Temperature characteristic	Low-level circuit applicable
-01	SPDT	-65°C to +125°C	No
-02	SPDT	-65°C to +260°C	No
-03	SPDT	-65°C to +125°C	Yes
-04	DPDT	-65°C to +125°C	No
-05	DPDT	-65°C to +260°C	No
-06	DPDT	-65°C to +125°C	Yes

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AV, MI
Navy - AS
Air Force - 11, 99
DLA - ES

User activities:
Navy - MC

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5930-1336)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.