MILITARY SPECIFICATION SHEET

SWITCH ASSEMBLIES, SENSITIVE, PUSH BUTTON, LOW LEVEL
TO 4 AMPERES, HERMETIC SEAL, MOMENTARY ACTION

This specification is approved for use by Naval Electronic Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the switch assemblies described herein shall consist of this specification and the latest issue of MIL-S-8805.


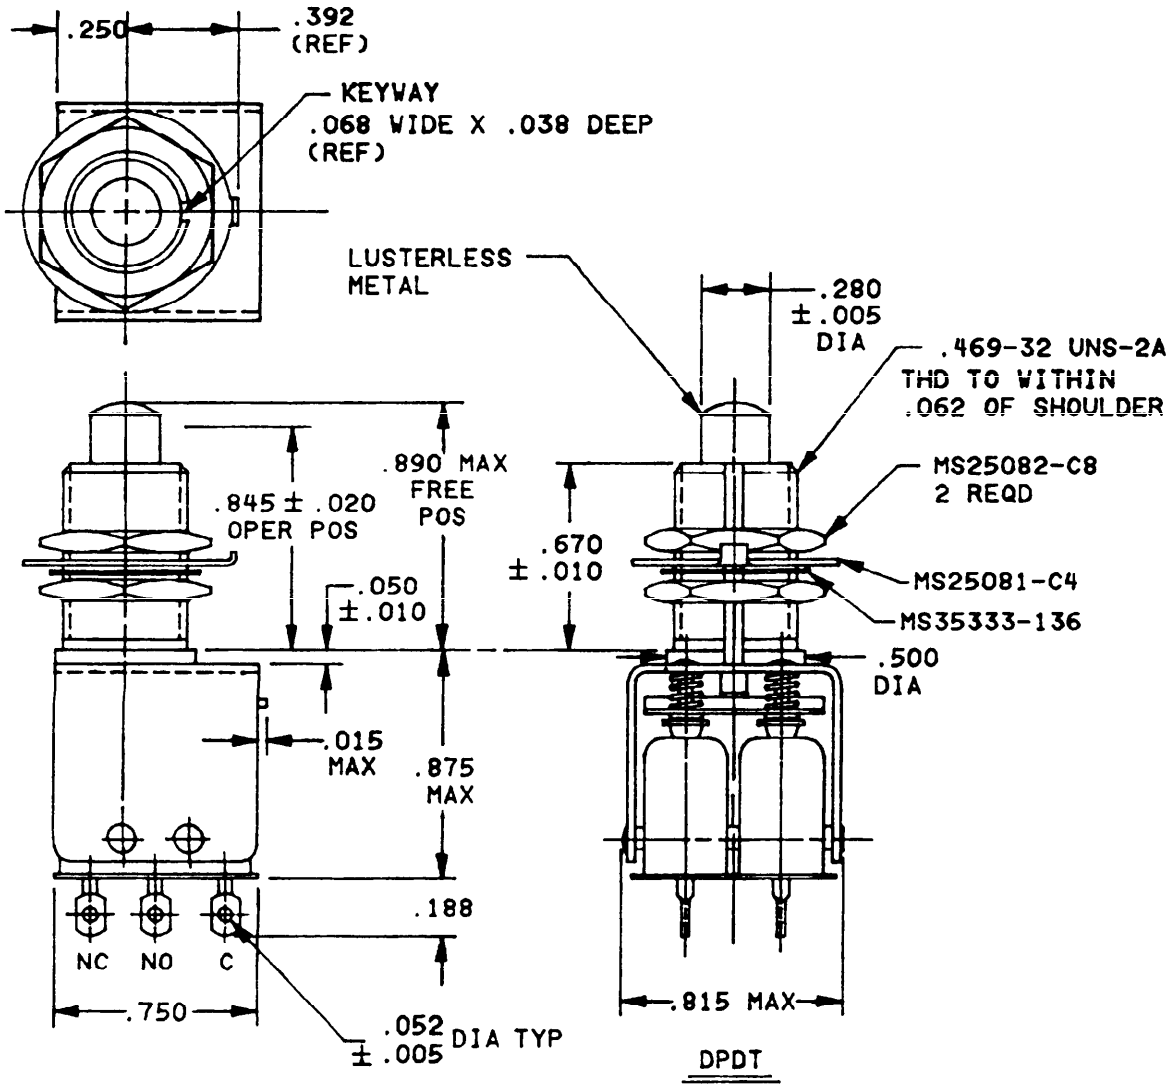


FIGURE 1. Configurations and dimensions.

FSC 5930

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

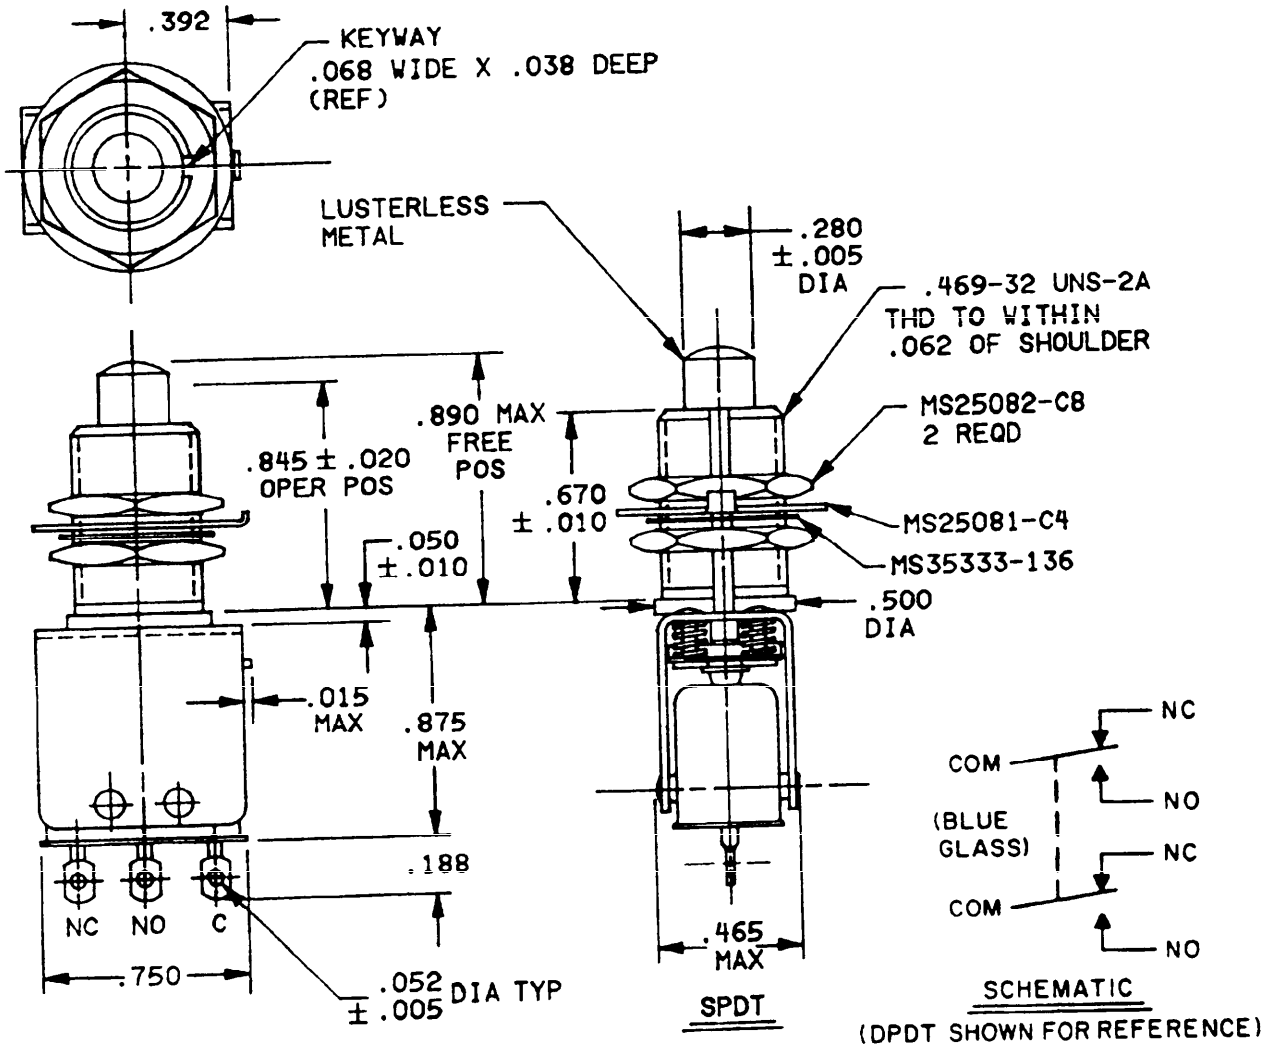

INCHES	MM	INCHES	MM
.005	0.13	.280	7.11
.010	0.25	.392	9.96
.015	0.38	.465	11.81
.020	0.51	.469	11.91
.035	0.89	.500	12.70
.050	1.27	.670	17.02
.052	1.32	.750	19.05
.062	1.57	.815	20.70
.068	1.73	.845	21.46
.188	4.78	.875	22.23
.250	6.35	.890	22.61

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only and are based upon 1 inch = 25.4 mm.
3. Configuration optional provided envelope dimensions specified are not exceeded.
4. Unless otherwise specified, tolerance is ±.015 (0.38 mm).

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.

Enclosure design: 5 (hermetic) 1/.

Temperature characteristic:

M8805/113-01 and -04: 2 (-65°C to +125°C).
M8805/113-02 and -05: -65°C to +260°C.
M8805/113-03 and -06: -85°C to +175°C.

Shock type: M (100 g, test condition I, method 213 of MIL-STD-202).

Vibration grade: 2 (10 - 2,000 Hz).

Weight:

Single pole: .06 pound maximum.
Double pole: .07 pound maximum.

Operating characteristics:

Operating force:

Single pole switches: 1.5 to 4.0 pounds.
Double pole switches: 2.0 to 5.0 pounds.

Coincidence of operating and release points: Within .010 inch of plunger travel.

Pretravel: .010 to .040 inch.

Overtravel: .080 to .120 inch.

Differential travel: .020 inch maximum.

Contact resistance:

MIL-S-8805/113-01, -02, -04 and -05: 125 milliohms maximum.
MIL-S-8805/113-03 and -06: 125 milliohms maximum initial, 1 ohm maximum after mechanical endurance.

Dielectric withstanding voltage:

Sea level: 1,000 V rms.

Low-level circuit: MIL-S-8805/113-03 and -06 only, 15,000 cycles.

Electrical and mechanical endurance: 15,000 cycles.

Short circuit: 90 amperes maximum.

Electrical ratings: See table I.

Military part number: See table III.

1/ For panel seal, use boot in accordance with MIL-B-5423/7 (part number M5423/07-01).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

TABLE I. Electrical ratings.

Part number	Load	Sea level and 70,000 ft 115 V ac, 400 Hz and 28 V dc
		Amperes
M8805/113 -01, -02, -04 and -05	Resistive	4
	Inductive	3
	Lamp	1.5
M8805/113 -03 and -06	Resistive	2
	Inductive	.5
	Lamp	.5
	Low level circuit test applicable	

QUALIFICATION:

Group submission: See table II. Table II applies provided that qualified MIL-S-8805/46 basic switches are utilized.

TABLE II. Qualification inspection.

Inspection	Switches for testing	Extent of qualification
Group I		All part numbers
Visual and mechanical examination Operating characteristics	M8805/113-05 (all sample units) M8805/113-03 (2 sample units)	
Group II		
Strength of actuating means Strength of mounting bushing Thermal shock Vibration Shock (specified pulse) Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	M8805/113-05 (4 sample units)	
Group III		
Salt spray (corrosion) Visual and mechanical examination	M8805/113-05 (2 sample units)	
Group IV		
Contact resistance Low temperature operation Mechanical endurance at low temperature Mechanical endurance at high temperature Contact resistance Operating characteristics Dielectric withstanding voltage Visual and mechanical examination	M8805/113-05 (4 sample units)	
Group V		
Electrical endurance Sea level inductive load, dc Dielectric withstanding voltage Operating characteristics	M8805/113-05 (2 sample units)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

TABLE III. Military part numbers.

Military part number M8805/113	Switching characteristic	Temperature characteristic	Low-level circuit applicable	Basic sensitive switch
-01	SPDT	-65°C to +125°C	No	M8805/46-001
-02	SPDT	-65°C to +260°C	No	M8805/46-002
-03	SPDT	-85°C to +175°C	Yes	M8805/46-003
-04	DPDT	-65°C to +125°C	No	M8805/46-001
-05	DPDT	-65°C to +260°C	No	M8805/46-002
-06	DPDT	-85°C to +175°C	Yes	M8805/46-003

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5930-N582-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:23Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-S-8805/113	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-17T11:23Z
Check the source to verify that this is the current version before use.