This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 1 OCT 52

PROCUREMENT SPECIFICATION (AA-FF-S-92)

CUSTODIANS: Ships


OTHER INT. A.: B.: AF:

SUPERSEDES: MAGNETIC, CORROSION RESISTING STEEL, PASSIVATED, UNC12A SCREWS, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, NON-

MILITARY STANDARD

MS16219 (SHIPS)

SHEET 1 OF 2

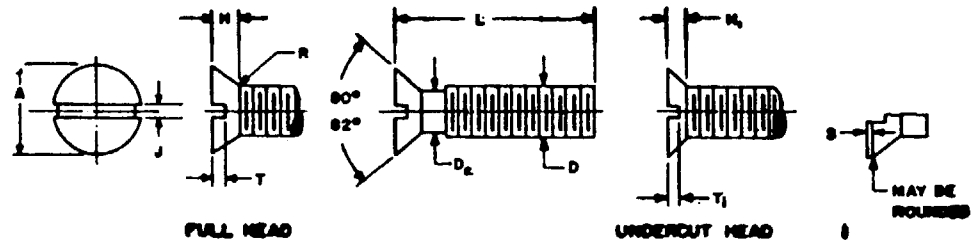

Nominal size (D)			1/4	3/8	1/2	5/8	3/4
Threads per inch			20	16	13	11	10
Body diameter (D)		Max.	0.250	0.375	0.500	0.625	0.750
		Min.	.212	.328	.443	.559	.677
Head diameter (A)		Max.	.507	.782	.875	1.125	1.375
		Min.	.462	.700	.802	1.035	1.267
Slot width (J)		Max.	.075	.094	.106	0.133	0.149
		Min.	.064	.081	.091	.116	.131
Flat (S)		Max.	.009	.013	.018	.023	.027
Radius (R)		Max	.100	.125	.154	.182	.200
Full head	Head height (H)	Max.	.153	.230	.223	.298	.372
		Min.	.131	.200	.186	.253	.319
	Slot depth (T)	Max.	.070	.108	.103	.137	.171
		Min.	.046	.070	.065	.088	.111
Undercut head	Head height (H_1)	Max.	.105	.162	.160	.212	.264
		Min.	.086	.132	.123	.167	.211
	Slot depth (T_1)	Max.	.058	.088	.085	.114	.142
		Min.	.046	.070	.065	.088	.111

Length (L)	Length tolerance	MS part No.	FIIN	MS part No.	FIIN	MS part No.	FIIN	MS part No.	FIIN	MS part No.	FIIN
[1]1	+0 -1/32	1		6		--		--		--	
1-1/2	+0 -1/16	2		7		--		--		--	
2		3		8		11		--		--	
2-1/2	+0 -3/32	-		9		12		20		31	
3		-		10		13		21		32	
3-1/2		-		--		14		22		33	
4		-		--		15		23		34	
5		-		--		16		24		35	
6		-		--		17		25		36	
8	+0 -1/8	-		--		18		26		37	
9		-		--		--		27		38	
10		-		--		--		28		39	
12		-		--		--		29		40	
								30		41	

[1]Have undercut head.

(Project 5305-N013Sh) Ⓐ For changes see sheets 1 and 2

FED. SUP. CLASS 5305

APPROVED 8 MAY 1957 REVISED Ⓐ 19 AUGUST 1966

This standard has been approved by the Naval Ship Engineering Center, Department of the Navy, and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

FED. SUP. CLASS 5305

Material: Material shall be austenitic corrosion resisting steel in accordance with class 302, 303, 304, 305, 310 or 316 of Specification QQ-S-763 or composition FS 302, 304, 310 or 316 of Specification QQ-W-423.

Threads: Threads shall be in accordance with Handbook H28.

Magnetic permeability: Magnetic permeability shall be 2.0 maximum (mμ) at 100/200 oersteds.

Dimensions: All dimensions are in inches, unless otherwise specified

(A) Protective coating: Screws shall be passivated in accordance with QQ-P-35.

Notes:

1. Referenced documents shall be the issue in effect on date of invitation for bids.
2. In case of conflict with any document referenced herein, this standard shall govern.

APPROVED 8 MAY 1957 REVISED (A) For changes see sheets 1 and 2

CUSTODIANS	OTHER INT.	MILITARY STANDARD	MS16219 (SHIPS)
Ships	A - N - AF -	SCREWS, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, NONMAGNETIC, CORROSION RESISTING STEEL, PASSIVATED, UNC-2A	SHEET 2 OF 2
Procurement Specification (A) FF-S-92			

DD FORM 672
1 OCT 52

A73533

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.