
FED. SUP CLASS
5970

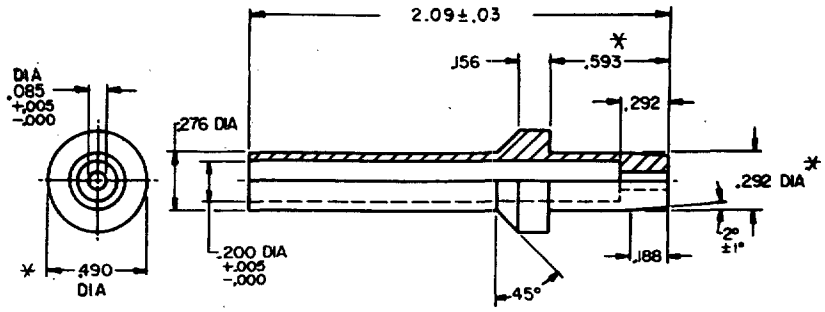

DIMENSIONS ARE IN INCHES

NOTES:

1. MATERIAL SHALL CONFORM TO GRADE 80, CLASS II SILICONE RUBBER IN ACCORDANCE WITH SPECIFICATION ZZ-R-765.
2. PART MUST BE FREE OF MOLD RELEASE COMPOUND.
3. ALL FILLET RADII .030 MAXIMUM.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES, TOLERANCES ARE: ± .005 ON DECIMALS: ±3° ON ANGLES.
5. SHEET 2 IS IDENTICAL WITH SHEET 1 EXCEPT THAT DIMENSIONS ARE IN MILLIMETERS.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

Ⓐ

NOTE:
CERTAIN PROVISIONS (IDENTIFIED BY *) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 4006. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

REVIEW ACTIVITIES: ARMY-MU; AF-82
USER ACTIVITIES: NAVY-MC

APPROVED 1 MAY 1958 REVISED (A) 15 DECEMBER 1966

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ARMY-AT Other Cust NAVY-YD AF-65		INSULATOR, BUSHING: SPARK PLUG CABLE TERMINAL (OTHER THAN AIRCRAFT)	MS16679
PROCUREMENT SPECIFICATION: NONE		SUPERSEDES:	SHEET 1 OF 2


DD FORM SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5970

REVIEW ACTIVITIES: ARMY-MU; AF-82
USER ACTIVITIES: NAVY-MC

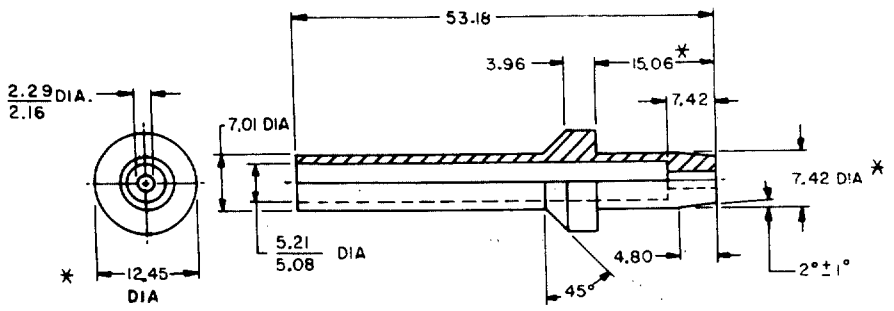

DIMENSIONS ARE IN MILLIMETERS

NOTES:

1. MATERIAL SHALL CONFORM TO GRADE 80, CLASS II SILICONE RUBBER IN ACCORDANCE WITH SPECIFICATION ZZ-R-765.
2. PART MUST BE FREE OF MOLD RELEASE COMPOUND.
3. ALL FILLET RADII .762 MAXIMUM.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±.13 ON DECIMALS: ± 3° ON ANGLES.
5. SHEET 1 IS IDENTICAL WITH SHEET 2 EXCEPT THAT DIMENSIONS ARE IN INCHES.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS.

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

Ⓐ

NOTE:
CERTAIN PROVISIONS (IDENTIFIED BY *) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT NATO STANAG 4006. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL EFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 1 MAY 1958 REVISED Ⓐ 4 DECEMBER 1966

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust NAVY-YD AF-85	INTERNATIONAL INTEREST	TITLE: INSULATOR, BUSHING: SPARK PLUG CABLE TERMINAL (OTHER THAN AIRCRAFT)	MILITARY STANDARD MS16679
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	SHEET 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:59Z
Check the source to verify that this is the current version before use.