FED. SUP CLASS
5940

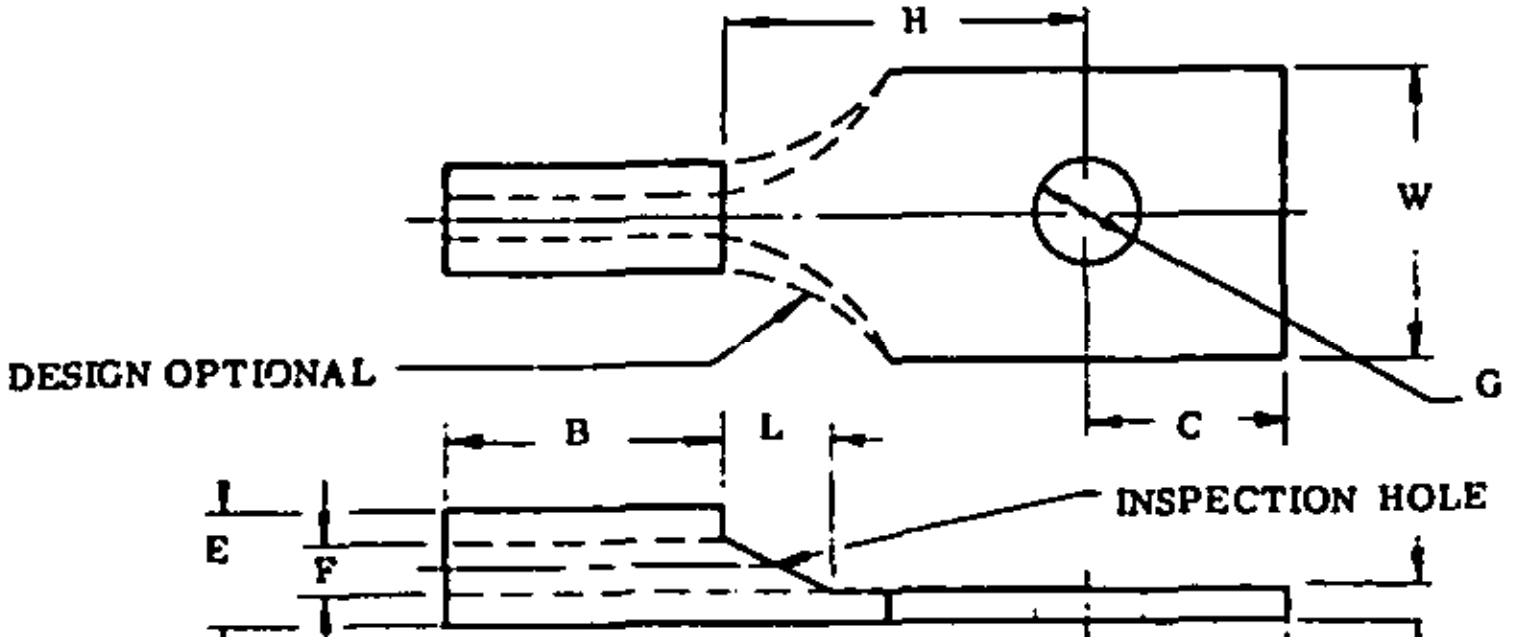

TABLE I

DASH NO.	WIRE SIZE	Ⓓ STUD SIZE	A MAX	B MIN	C ±.010	D	E	F	G		H MIN	L MAX	W ±.005	MIL-T-16366 (SHIPS) REFERENCE
									MAX	MIN				
Ⓓ 22	22-18	2 (.086)	.759	.240	.110	.037 .023	.165 .110	.070 .052	.098	.090	.203	.125	.182	
1		4 (.112)	.826	.250	.143				.122	.114	.237	.125	.237	L-86, 1-2
2		5 (.125)	.858		.143				.137	.129	.277	.125	.277	L-83, 1-2
3		8 (.164)	1.040		.227				.178	.168	.465	.250	.302	L-82, 1-2
4		6 (.138)							.152	.142	.465	.250	.302	L-81, 1-2
5		4 (.112)	.980		.195				.122	.114	.404	.156	.237	L-85, 1-2
6		6 (.138)							.152	.142	.404	.156	.237	L-84, 1-2
7		8 (.164)	1.290		.310				.178	.168	.621	.281	.390	L-80, 1-2
8	16-14	4 (.112)	.889	.250	.143	.037 .023	.192 .139	.090 .081	.122	.114	.237	.125	.237	L-86, 2-1/2-4
9		5 (.125)	.921		.143				.137	.129	.277	.125	.277	L-83, 2-1/2-4
10		8 (.164)	1.075		.227				.178	.168	.465	.250	.302	L-82, 2-1/2-4
11		6 (.138)							.152	.142	.465	.250	.302	L-81, 2-1/2-4
12		4 (.112)	1.043		.195				.122	.114	.404	.156	.237	L-85, 2-1/2-4
13		6 (.138)							.152	.142	.404	.156	.237	L-84, 2-1/2-4
14		8 (.164)	1.294		.310				.178	.168	.621	.281	.390	L-80, 2-1/2-4
15	12-10	4 (.112)	1.014	.250	.143	.046 .032	.255 .199	.135 .128	.122	.114	.237	.125	.237	L-86, 6-9
16		5 (.125)	1.146		.143				.137	.129	.277	.125	.277	L-83, 6-9
17		8 (.164)	1.200		.227				.178	.168	.465	.250	.302	L-82, 6-9
18		6 (.138)							.152	.142	.465	.250	.302	L-81, 6-9
19		4 (.112)	1.168		.195				.122	.114	.404	.156	.237	L-85, 6-9
20		6 (.138)							.152	.142	.404	.156	.237	L-84, 6-9
21		8 (.164)	1.419		.310				.178	.168	.621	.281	.390	L-80, 6-9

TABLE II (REF)

WIRE SIZE	NAVY CABLE SIZE
22-18	1 (1)
	1 (7)
	1 (10)
	1-1/2 (1)
	1-1/2 (7)
	1-1/2 (16)
	1-1/2 (41)
	2 (7)
16-14	2-1/2 (1)
	2-1/2 (19)
	2-1/2 (26)
	3 (7)
	4 (1)
	4 (19)
	4 (7)
	4 (41)
12-10	6 (7)
	6 (19)
	9 (7)
	9 (37)

REQUIREMENTS:

1. MATERIAL: SEE ACQUISITION SPECIFICATION.
2. FINISH: TIN PLATED. SEE ACQUISITION SPECIFICATION.
3. DIMENSIONS IN INCHES.
4. TENSILE STRENGTH: THE TENSILE STRENGTH SHALL BE THAT SPECIFIED IN ACQUISITION SPECIFICATION.
5. Ⓓ DESIGN AND CONSTRUCTION: LUG TERMINALS SHALL BE OF THE DESIGN, CONSTRUCTION AND PHYSICAL DIMENSIONS SPECIFIED IN THE FIGURE AND TABLE I AND SHALL MEET THE PERFORMANCE REQUIREMENTS OF MIL-T-7928 WHEN CRIMPED ON MIL-C-915 AND MIL-C-2194 CABLE WITH A MIL-C-22520/25 CRIMPING TOOL AND MIL-C-22520/24 CRIMPING TOOL. THIS STANDARD DEPICTS ONLY GENERAL DESIGN CHARACTERISTICS AND IS NOT INTENDED TO LIMIT SPECIFIC MANUFACTURING PROCESSES. WIRE INSULATION SUPPORT NOT REQUIRED.
6. THE COMBINATION OF DIMENSIONS H, C AND L MUST PERMIT WIRED TERMINALS TO BE STACKED ON ONE STUD ON THE FOLLOWING TERMINAL BOARDS IN THE QUANTITY SHOWN:

STYLE	TERMINAL BOARD MIL-T-55164	QUANTITY OF WIRED TERMINALS
L80	-/10	4
L81	-/12	4
L82	-/19	4
L83	-/14	2
L84	-/16	4
L85	-/25	3
L86	-/24	2

FOR DESIGN FEATURE PURPOSES, THE STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

Ⓓ REVISED AND REDRAWN

P.A. NAVY - AS Other Cust ARMY - ER USAF - 99	TITLE TERMINAL, LUG, UNINSULATED, RECTANGULAR TONGUE, CRIMP STYLE, COPPER, TYPE I, CLASS 1 FOR 175°C TOTAL CONDUCTOR TEMPERATURE	MILITARY STANDARD MS21004
ACQUISITION SPECIFICATION MIL-T-7928	SUPERSEDES:	SHEET 1 OF 2

APPROVED 26 Sept 67 REVISED Ⓐ 20 Dec 68 Ⓑ 2 Sept 69 Ⓒ 12 March 1973 Ⓓ 3 JUNE 1981

REVIEWER SYMBOLS:
NAVY - SH, EC
ARMY - AV, MI
USAF - 11, 17, 85

USER SYMBOLS:
USAF - 17

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.

USER SYMBOLS:
USAF - 17

REVIEWER SYMBOLS:
NAVY - SH, EC
ARMY - AV, MI
USAF - 11, 17, 85

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5940

METRIC TABLE FOR MS21004D

Ⓓ

INCHES	MM	INCHES	MM	INCHES	MM	INCHES	MM
.023	0.58	.129	3.28	.199	5.05	.826	20.98
.032	0.81	.135	3.43	.203	5.16	.858	21.79
.037	0.94	.137	3.48	.227	5.77	.889	22.58
.046	1.17	.138	3.51	.237	6.02	.921	23.39
.052	1.32	.139	3.53	.240	6.10	.980	24.89
.070	1.78	.142	3.61	.250	6.35	1.014	25.76
.081	2.06	.143	3.63	.255	6.48	1.040	26.42
.086	2.18	.152	3.86	.277	7.04	1.043	26.49
.090	2.29	.156	3.96	.281	7.14	1.075	27.31
.098	2.49	.164	4.17	.302	7.67	1.146	29.11
.110	2.79	.165	4.19	.310	7.87	1.168	29.67
.112	2.84	.168	4.27	.390	9.91	1.200	30.48
.114	2.90	.178	4.52	.404	10.26	1.290	32.77
.122	3.10	.182	4.62	.465	11.81	1.294	32.87
.125	3.18	.192	4.88	.621	15.77	1.419	36.04
.128	3.25	.195	4.95	.759	19.28		

APPROVED 26 Sept 67 REVISED Ⓓ For Changes See Sheets 1 and 2

P.A. NAVY - AS Other Cust ARMY - ER USAF - 99	TITLE TERMINAL, LUG, UNINSULATED, RECTANGULAR TONGUE, CRIMP STYLE, COPPER, TYPE I, CLASS 1 FOR 175°C TOTAL CONDUCTOR TEMPERATURE	**MILITARY STANDARD** **MS21004**
ACQUISITION SPECIFICATION MIL-T-7928	SUPERSEDES	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO 23085

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:25Z
Check the source to verify that this is the current version before use.