
FED. SUP CLASS
4730

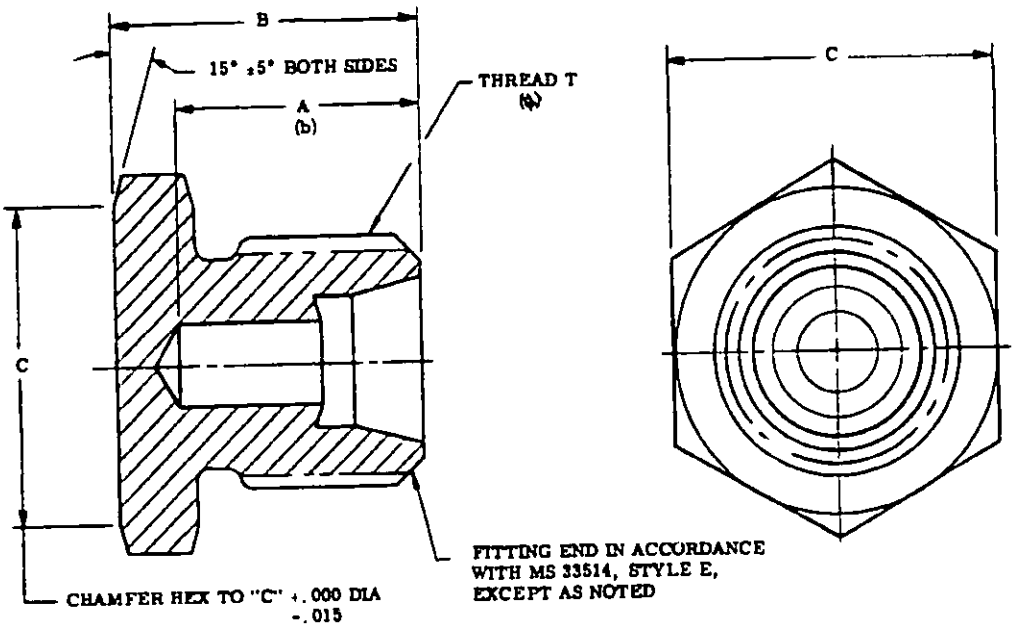

(E)

DASH NO.	TUBE OD	THREAD T (a) MIL-S-8879	A -3/64 +0	B	C		WT LB MAX STEEL	AL ALLOY	TI ALLOY
-2	1/8	.3125-24UNJF-3A	3/8	9/16	.438	+.003 -.004	.014	.005	.008
-3	3/16	.3750-24UNJF-3A	7/16	39/64			.017	.006	.009
-4	1/4	.4375-20UNJF-3A		41/64	.500		.020	.007	.011
-5	5/16	.5000-20UNJF-3A	1/2	43/64	.563		.026	.010	.015
-6	3/8	.5625-18UNJF-3A		23/32	.625	±.004	.033	.012	.019
-8	1/2	.7500-16UNJF-3A	9/16	27/32	.812		.067	.024	.038
-10	5/8	.8750-14UNJF-3A	5/8	63/64	.938		.107	.038	.061
-12	3/4	1.0625-12UNJ-3A	11/16	1-1/32	1.125	±.005	.174	.062	.100
-16	1	1.3125-12UNJ-3A		1-1/16	1.375		.245	.091	.141
-20	1-1/4	1.6250-12UNJ-3A	5/8	1-3/32	1.688	±.016	.390	.150	.225
-24(b)	1-1/2	1.8750-12UNJ-3A	23/32		2.000		.540	.192	.311
-32(b)	2	2.5000-12UNJ-3A	11/16		2.625	±.020	.965	.354	.556

(E)

(a) ~~PARTS WITH THREADS IN ACCORDANCE WITH MIL-S-7742 OF THE SAME THREAD SIZE, PITCH AND TOLERANCE CLASS CAN BE USED UNTIL STOCKS ARE EXHAUSTED.~~

(b) DRILL POINT NOT PERMITTED ON -24 AND -32 SIZES, HOLE SHALL BE FLAT BOTTOMED IN ACCORDANCE WITH DIMENSION A.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(E) DENOTES CHANGES

APPROVED 4 OCT 51 REVISED (D) 13 JUL 73 (E) 26 JUNE 1981

P.A. NAVY - AS Other Cust USAF - 99 ARMY - AV	INTERNATIONAL INTEREST *	TITLE PLUG, FLARELESS TUBE	MILITARY STANDARD MS 21913
PROCUREMENT SPECIFICATION MIL-F-18280		SUPERSEDES.	SHEET 1 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE PROJECT NO. 4730-0157 PLATE NO. 21913

USER SYMBOLS: Navy - OS Army - CL, CR, ME, AT

REVIEWER SYMBOLS: USAF - 11 ARMY - AR, MI DLA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:41Z
Check the source to verify that this is the current version before use.

User activities:
Navy - OS
Army - CL, CR, ME, AT

Review activities:
USAF - 11
Army - AR, MI
DLA - CS

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PED. SUP CLASS
4730

NOTES:

1. MATERIAL: CARBON STEEL - BARS
ALUMINUM ALLOY - BARS
CORROSION RESISTANT STEEL - BARS
(E) TITANIUM ALLOY - BARS
} SEE PROCUREMENT SPECIFICATION

2. FINISH: SEE PROCUREMENT SPECIFICATION.

3. BREAK ALL SHARP EDGES AND REMOVE ALL BURRS AND SLIVERS.

4. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTION ±1/64.

5. PART NUMBERS:

NO CODE LETTER IN PART NUMBER FOR CARBON STEEL.

ADD D IN PLACE OF DASH FOR ALUMINUM ALLOY (2024).

ADD W IN PLACE OF DASH FOR ALUMINUM ALLOY (7075).

ADD J IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 304.

ADD K IN PLACE OF DASH FOR CORROSION RESISTANT STEEL, TYPE 316.

ADD S AFTER DASH NUMBER FOR CORROSION RESISTANT STEEL, TYPE 347. PARTS ARE NOT TO BE MANUFACTURED FROM TYPE 304L STEEL.

(E) ADD T AFTER DASH NUMBER FOR TITANIUM ALLOY (6AL-4V).

EXAMPLES OF PART NUMBERS:

MS21913-4 - PLUG, 1/4 TUBING, CARBON STEEL.

MS21913D4 - PLUG, 1/4 TUBING, ALUMINUM ALLOY (2024).

MS21913W4 - PLUG, 1/4 TUBING, ALUMINUM ALLOY (7075).

MS21913J4 - PLUG, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 304.

MS21913K4 - PLUG, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 316.

MS21913-4S - PLUG, 1/4 TUBING, CORROSION RESISTANT STEEL, TYPE 347.

(E) MS21913-4T - PLUG, 1/4 TUBING, TITANIUM ALLOY (6AL-4V).

(E) 6. ~~PARTS CODED C ARE INACTIVE FOR DESIGN AFTER 27 JUNE 1969. PARTS CODED C MAY BE USED UNTIL STOCKS ARE EXHAUSTED. PARTS CODED J OR K MAY BE USED IN LIEU OF PARTS CODED C.~~

(E) ITEMS CODED "C" ON PREVIOUS ISSUES OF THIS STANDARD ARE NO LONGER TO BE FURNISHED. UNLESS OTHERWISE SPECIFIED, PARTS CODED J, K, OR S (AT SUPPLIER'S OPTION) SHALL BE FURNISHED IN LIEU OF "C" CODED PARTS.

(E) 7. TITANIUM NOT RECOMMENDED FOR USE IN OXYGEN SYSTEMS.

* CERTAIN PROVISIONS (SCREW THREADS, HEXAGON SIZE AND UNDERCUT DIMENSIONS) OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ASCC AIR STD 17/15. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 4 OCT 51 REVISED (E) FOR CHANGES SEE SHEET 1 AND 2

P.A. Other Cost USAF-99 ARMY-AV	INTERNATIONAL INTEREST *	TITLE: PLUG, FLARELESS TUBE	MILITARY STANDARD MS21913
PROCUREMENT SPECIFICATION MIL-P-18280		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1961—605-625/9757

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:41Z
Check the source to verify that this is the current version before use.