
FED. SUP CLASS
5925

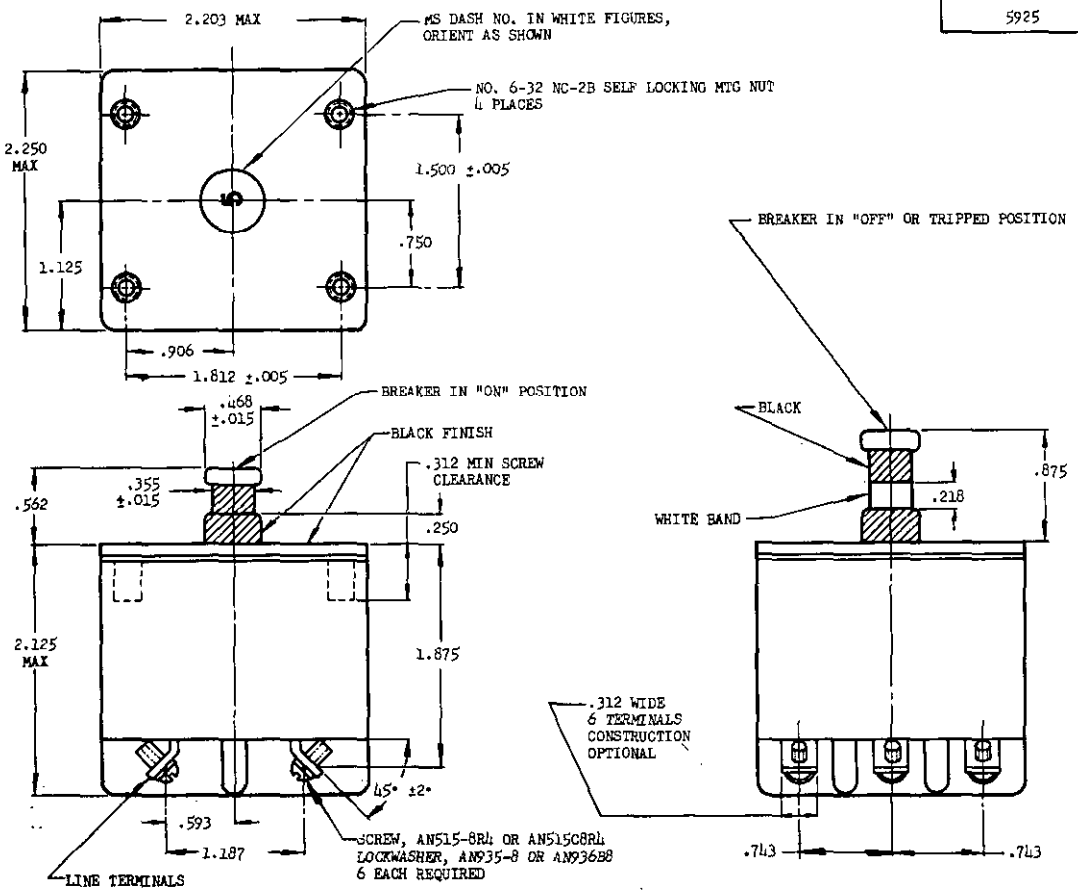

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

DETAIL REQUIREMENTS

MAXIMUM	
OPERATING FORCE:	
PULL OUT	8 LB
RESET	15 LB
OPERATING ALTITUDE	60,000 FT
VOLTAGE DROP	.3 VOLTS
WEIGHT	.5 LB

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, DECIMALS: ±.031.

DASH NO.	CAPACITY AMPERES
-1	5
-2	7.5
-3	10
-4	15
-5	20
-6	25
-7	30
-8	35
-9	50
-10	60

(C)

INTERCHANGEABILITY RELATIONSHIP: MS24549 AND MS21984 PARTS OF THE SAME AMPERE CAPACITY ARE UNIVERSALLY, FUNCTIONALLY, AND DIMENSIONALLY INTERCHANGEABLE.

(C) CANCELED AFTER 1 MAY 1967. USE MS21984.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID. (C) FOR CHANGES SEE SHEETS 1 AND 2.

APPROVED 25 Feb 59 — REVISED (A) 30 Nov 59 (B) 30 Jan 61 (C) 1 May 67

This standard has been approved by the BuWeps (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. USAF - DAY Other Cust Navy - Wep	TITLE (C) CIRCUIT BREAKER - AIRCRAFT, TRIP-FREE, PUSH-PULL, 3-PHASE, 5 THRU 60 AMP.	MILITARY STANDARD MS24549 (ASG)
PROCUREMENT SPECIFICATION MIL-C-5809	SUPERSEDES:	SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.

ENDURANCE

SYSTEM	VOLTAGE	TYPE OF LOAD	NO. OF CYCLES
400 CYCLE 115/200V	120 ± 5 380 - 420 CPS	INDUCTIVE	5,000
		RESISTIVE	5,000
MECHANICAL CYCLING	.0	NO LOAD	5,000

RUPTURE CAPACITY

TEST NO.	SYSTEM	VOLTAGE BEFORE FAULT	CALIBRATED FAULT CURRENT (AMPERES)	TRANSIENT VOLTAGE AFTER CALIBRATED FAULT CURRENT INTERRUPTION	OPEN CIRCUIT VOLTAGE
A B	400 CYCLE 115/200V	205 ± 5	1,500 3-Ø SYMMETRICAL FAULT IN 10-25 CYCLES AFTER FAULT INITIATION POWER FACTOR .4 - .5 LAGGING	120 WITHIN 3 CYCLES 150 WITHIN 6 CYCLES 165 MAXIMUM	205 ± 5
C D	400 CYCLE 115/200V	120 ± 5	2,500 SINGLE-Ø FAULT IN 10-25 CYCLES AFTER FAULT INITIATION POWER FACTOR .4 - .5 LAGGING	120 WITHIN 3 CYCLES 150 WITHIN 6 CYCLES 165 MAXIMUM	120 ± 5

CALIBRATION

TEST	CIRCUIT BREAKER RATING	PERCENT RATED CURRENT (b)	AMBIENT TEMP. °C (±2°C)	TRIPPING TIME
MIN ULT TRIP	5 THRU 60	105	25	NO TRIP (a)
MAX ULT TRIP		135	25	1 HOUR MAX
OVERLOAD CALIBRATED UNBAL. 3-Ø LOAD		TWO PHASE 100 ONE PHASE 145	25	1 HOUR MAX
OVERLOAD CALIBRATION		200 400 1,000	25	10 - 70 SEC 2.0 - 9 SEC .35 - 2.4 SEC
AMBIENT EFFECT ON CALIBRATION		130 160 70 110	-65 -65 +71 +71	NO TRIP (a) 1 HOUR MAX NO TRIP (a) 1 HOUR MAX

(a) TESTING TIME 1 HOUR.
(b) BALANCED THREE PHASE LOAD UNLESS INDICATED OTHERWISE.

ALL VALUES OF A-C VOLTAGE AND CURRENT ARE RMS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED REVISED (C) FOR CHANGES SEE SHEETS 1 AND 2.

P.A. USAF - DAY
Other Cust
Navy - Wep

TITLE (C)
CIRCUIT BREAKER - AIRCRAFT, TRIP-FREE, PUSH-PULL, 3-PHASE, 5 THRU 60 AMP

MILITARY STANDARD
MS24549 (ASG)

PROCUREMENT SPECIFICATION
MIL-C-5809

SUPERSEDES.

SHEET 2 OF

DD FORM 1 SEP 57 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

*U.S. GOVERNMENT PRINTING OFFICE: 1967-231-516/6183

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This standard has been approved by the Bureaus (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:56Z
Check the source to verify that this is the current version before use.