
FED. SUP CLASS
4730

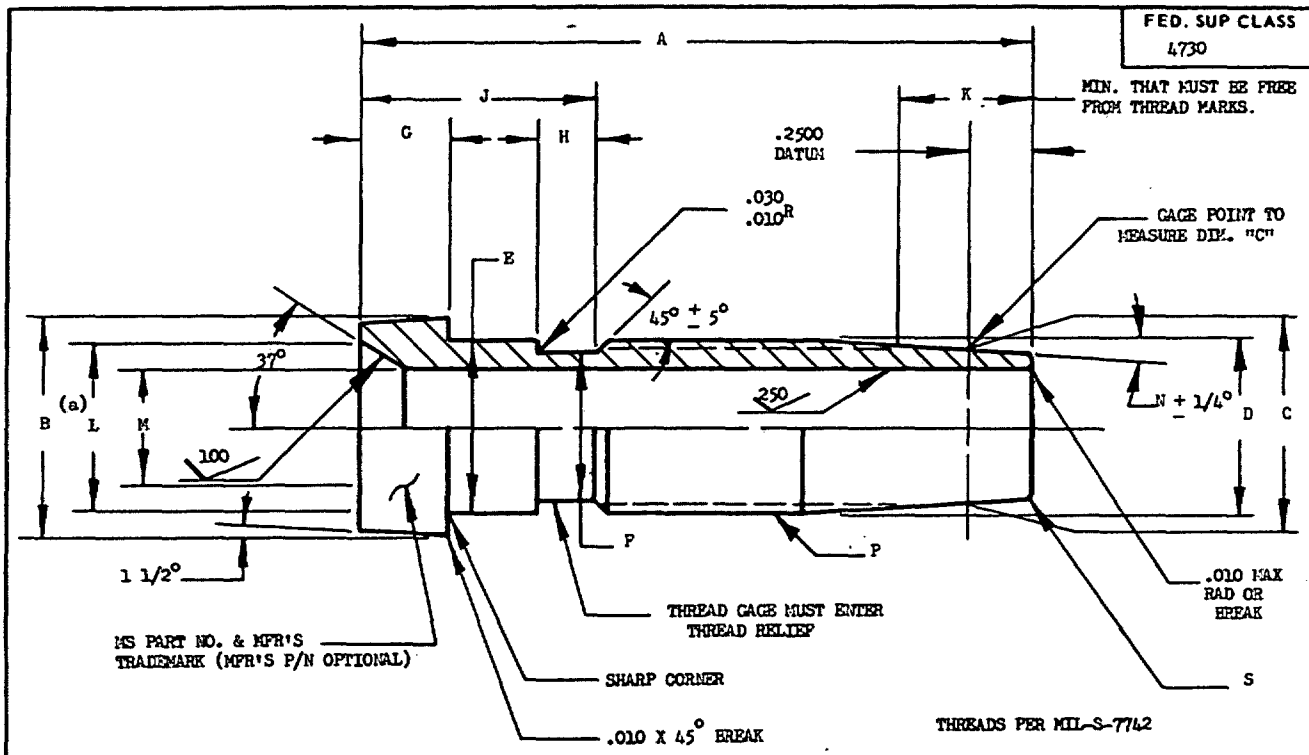

(a) DIMENSION L TO BE CONCENTRIC WITH DIMENSION B WITHIN .005 FULL INDICATOR READING

MS PART NO.	A	B	C	D	E	F	G	H	J	K	L	M	N	P	S
MS24588-3	1.275 1.255	.326 .321	.185 .180	.234 .228	.235 .227	.203 .198	.188 .183	.093	.495	.270	.255 .235	.128 .123	5°	.2131 15/64-32NS-2 PD .2100	.010 .005
MS24588-4	1.305 1.285	.379 .374	.243 .237	.281 .275	.291 .283	.250 .245	.183 .178	.093	.490	.200	.305 .285	.175 .170	4-1/2°	.2597 .281-32NS-2 PD .2565	.015 .009
MS24588-5	1.450 1.430	.442 .437	.308 .302	.365 .357	.368 .360	.329 .324	.199 .194	.107	.565	.280	.365 .345	.237 .232	4°	.3398 .365-28NS-2 PD .3365	.020 .010
MS24588-6	1.665 1.645	.504 .499	.368 .362	.421 .414	.429 .421	.388 .383	.223 .218	.107	.605	.260	.445 .425	.300 .295	4°	.3968 .421-28NS-2 PD .3932	.020 .010
MS24588-8	1.943 1.923	.684 .679	.463 .457	.5625 .5540	.563 .555	.521 .516	.296 .291	.126	.683	.480	.580 .560	.394 .390	4-1/2°	9/16-24NEF-2A	.020 .010
MS24588-10	2.100 2.080	.800 .795	.579 .573	.6875 .6750	.692 .684	.646 .641	.312 .307	.126	.730	.515	.690 .670	.488 .484	5°	11/16-24NEF-2A	.020 .010
MS24588-12	2.424 2.404	.975 .970	.690 .682	.8125 .8030	.814 .806	.740 .735	.300 .295	.150	.714	.590	.860 .840	.612 .608	4°	13/16-20UNEF-2A	.020 .010

MATERIAL:

SIZES 3 THRU 6 TO BE 1137 STEEL PER QQ-S-633.
SIZES 8 AND ABOVE TO BE ALUMINUM PER QQ-A-268, T6 OR T851 TEMPER.

PROTECTIVE TREATMENT:

STEEL- CADMIUM PLATE PER QQ-P-416, TYPE II, CLASS 3, DYED BLACK
ALUMINUM- ANODIZE PER MIL-A-8625, TYPE II, DYED BLUE.

125 MAXIMUM SURFACE ROUGHNESS PER MIL-STD-10, UNLESS OTHERWISE SPECIFIED.

BREAK ALL SHARP EDGES AND REMOVE ALL HANGING BURRS AND SLIVERS THAT MIGHT BECOME DISLODGED UNDER USAGE.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ± 1/2°; FRACTIONS ± 1/64; DECIMALS ± .005

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
THIS PART IS A COMPONENT OF MS24587.

(A) "ENTIRE STANDARD REVISED"

APPROVED 29 March 1960 REVISED (A) 6 August 1964

P.A. AIR FORCE -69 Other Cust Army - WC Navy - WP	TITLE NIPPLE, ADAPTER, HOSE TO TUBE, REUSABLE, HYDRAULIC, FUEL AND OIL LINES. 3/16 THROUGH 3/4 INCH TUBING SIZES.	MILITARY STANDARD MS 24588
PROCUREMENT SPECIFICATION MIL-A-5070	SUPERSEDES: MS24588(USAF)	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) Previous editions are obsolete

User Activity

Review Activity
Air Force - 69
Army - WC
Navy - WP

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:37Z
Check the source to verify that this is the current revision before use.