

FED SUP CLASS
5930

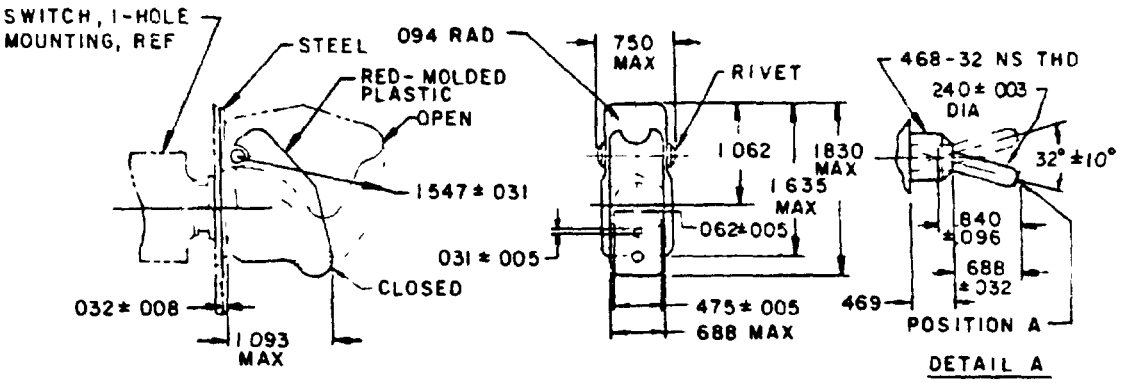


-1

SUITABLE FOR USE WITH SWITCHES HAVING TOGGLE CHARACTERISTICS IN ACCORDANCE WITH DETAIL A
(1-HOLE MOUNTING)

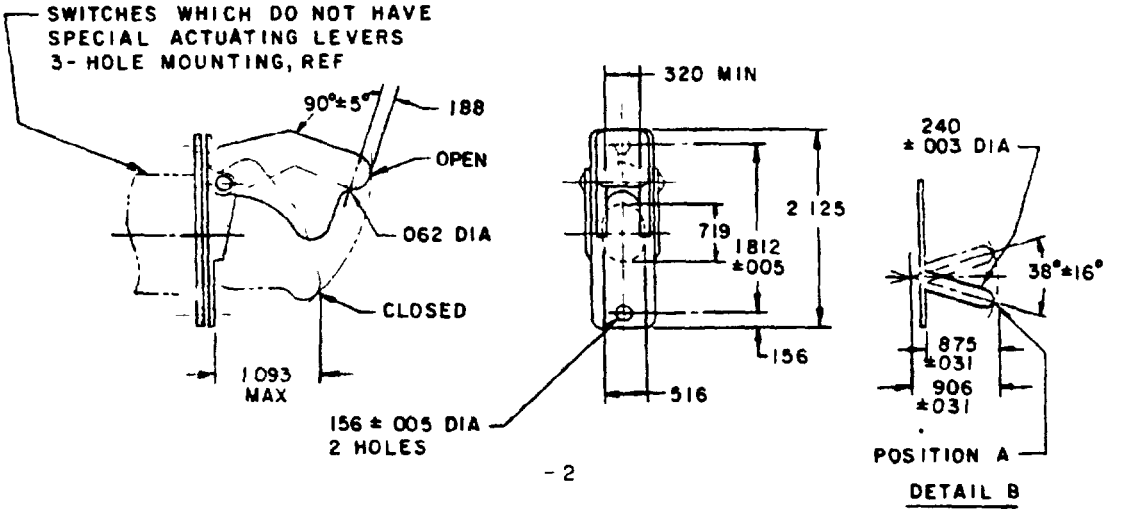


-2

SUITABLE FOR USE WITH SWITCHES HAVING TOGGLE CHARACTERISTICS IN ACCORDANCE WITH DETAIL B
(3-HOLE MOUNTING)

| DASH NO | TYPE | PANEL THICKNESS (REF) | OPERATING FORCE | REMARKS |
|---|---|---|---|---|
| -1 | 1-HOLE MOUNTING | 050 TO 248 | 1 0 TO 2 5 LB | |
| -2 1/ | 3-HOLE MOUNTING | 050 TO 081 | | IDENTICAL TO -1, EXCEPT KEYWAY IS ROTATED 180° |
| -3 | 1-HOLE MOUNTING | 050 TO 248 | | |

1/ INACTIVE FOR NEW DESIGN - FOR REPLACEMENT ONLY

Ⓖ denotes changes

| | | | |
|---|---|---|---|
| P A AF-85<br>Other Cust<br>ARMY-ER<br>NAVY-AS | International interest | TITLE<br>GUARD, SWITCH, 2 POSITION | MILITARY STANDARD<br>MS25224 |
| Procurement Specification<br>MIL-G-7703 | | SUPERSEDES<br>AN 3028 | PAGE 1 OF 2 |

DD FORM 1 MAY 72 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5930-1226-6

APPROVED 13 MAR 57 REVISED Ⓖ 20 DEC 82

User activities Army - Navy - Air Force -
Review activities Army - Navy - Air Force - 99

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5930

| | INCHES | MM | INCHES | MM | INCHES | MM |
|---|---|---|---|---|---|---|
| (G) | .003 | .08 | .156 | 3.96 | .840 | 21.34 |
| | .005 | .13 | .188 | 4.77 | .875 | 22.22 |
| | .008 | .20 | .240 | 6.10 | .906 | 23.01 |
| | .016 | .41 | .248 | 6.30 | 1.062 | 26.97 |
| | .031 | .79 | .320 | 8.13 | 1.093 | 27.76 |
| | .032 | .81 | .469 | 11.91 | 1.547 | 39.29 |
| | .050 | 1.27 | .475 | 12.06 | 1.635 | 41.53 |
| | .062 | 1.57 | .516 | 13.11 | 1.812 | 46 02 |
| | .081 | 2.06 | .688 | 17.47 | 1.830 | 46.48 |
| | .094 | 2.39 | .719 | 18.26 | 2.125 | 53.98 |
| | .096 | 2.44 | .750 | 19.05 | | |

NOTES
1. Dimensions are in inches.
2. Unless otherwise specified, tolerances are ±.016 on decimals.
3. Material Plastic, molded, red, number 11136, Federal Standard 595. Steel, commercial, shall be smooth and free from burrs.
(G) 4. Finish Zinc plate, QQ-Z-325, type III, or cadmium plate, QQ-P-416, type III, with optional supplementary treatment per MIL-C-8514 or DOD-P-15328, black enamel, lusterless, color number 37038 or semigloss, color number 27038, Federal Standard 595 or equivalent.
5. Guard shall remain in either the open or closed position.
6. Opening the guard shall not change position of switch contacts.
7. Toggle switch shown in position A.
8. Closing the guard shall place the toggle in position A.
9. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
10. Referenced documents shall be of the issue in effect on date of invitations for bid

REVISED (G) FOR CHGS SEE PG 2

APPROVED

| | | | |
|---|---|---|---|
| P A AF-85<br>Other Cust<br>ARMY-ER<br>NAVY-AS | International interest | TITLE<br>GUARD, SWITCH, 2 POSITION | MILITARY STANDARD<br>MS25224 |
| Procurement Specification<br>MIL-G-7703 | | SUPERSEDES<br>AN 3028 | PAGE 2 OF 2 |

DD FORM 1 MAY 73 672 (Coordinated) previous editions of this form are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE 1983— 605 034 469

User activities Army - Navy - Air Force -

Review activities Army - Navy - Air Force -99

This military standard is approved for use by all Departments and Agencies of the Department of Defense Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable