
FED. SUP CLASS
6240

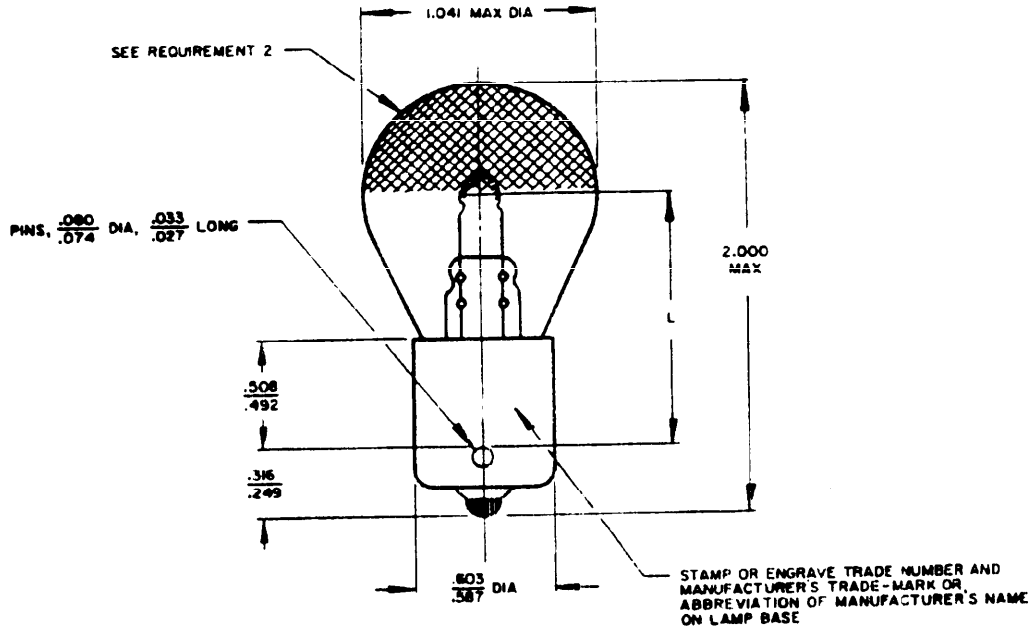

Dash No.	Trade No.	L	Rated		Design Max Amperes	Filament Type	Finish	Average Life Hours
			Volts	Candle-power				
307	307	1.125 ± .062	28	(NOTE 2)	.65	C-2V	Clear	300
SB307	307SB			21			Req't C	300
R307	307R						Red	300
1683	1683	1.250 ± .047		32	1.02	2(C-2R) or 2(C-6)	Clear	500
1680	1680	1.250 ± .063	6		4.10	C-6		300

(D) REQUIREMENTS:

1. LIGHT EMITTED BY RED LAMPS SHALL CONFORM TO MIL-C-25050 FOR INSTRUMENT AND PANEL LIGHTING RED. RED COATINGS, WHEN USED, SHALL BE TRANSLUCENT.
2. FINISH CLEAR, EXCEPT TOP TO RECEIVE AN ALUMINIZED REFLECTIVE COATING. DISTANCE FROM EDGE OF COATING TO TOPS OF BAYONET PINS SHALL BE APPROXIMATELY EQUAL TO LIGHT CENTER LENGTH.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. RATED CANDLEPOWER APPLIES TO LAMP BEFORE RED COATING OR REFLECTIVE COATING IS APPLIED.
3. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

(D) MS25232 REACTIVATED. SUPERSEDES MS35478 FOR PROCUREMENT OF LAMPS UNDER MIL-L-6363 FOR AIRCRAFT SERVICE.

APPROVED 1 APR 57 — REVISED (A) 10 APR 59 (B) 2 MAR 60 (C) 16 SEP 60 (D) 15 JUN 87

REVIEWER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

AMSC N/A

P.A. NAVY - AS Other Cust USAF - 99 ARMY - AV	TITLE LAMP, INCANDESCENT, SINGLE CONTACT BAYONET CANDELABRA BASE, S-6 BULB	MILITARY STANDARD MS25232
PROCUREMENT SPECIFICATION MIL-L-6363	SUPERSEDES AN3124, MS35478	SHEET 1 OF 1

DD FORM 672-1 (Limited Coordination) Previous editions are obsolete. (PROJECT NO. 6240-F003)

Source: https://assist.dla.mil - Downloaded: 2026-10-23T15:06Z
Check the source to verify that this is the current version before use.