FED SUP CLASS
5330

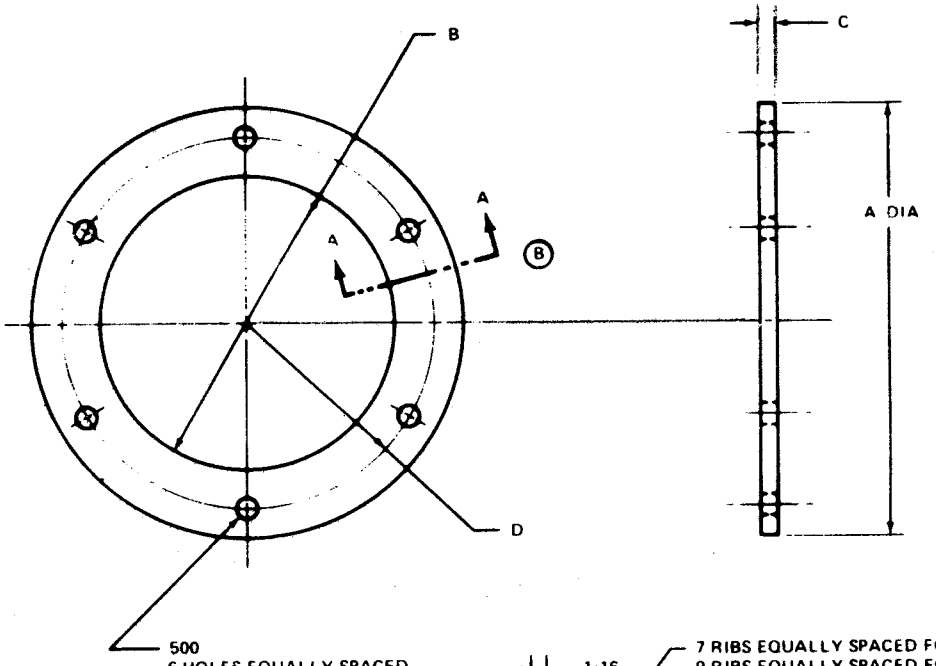

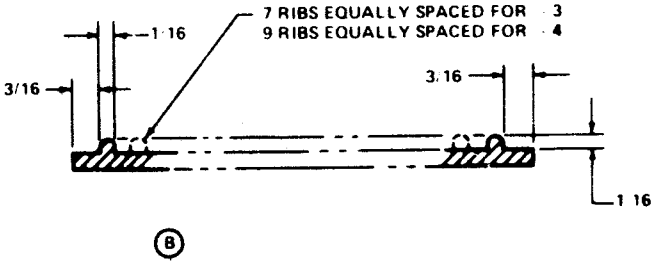

SECTION A - A
RIB DESIGN FOR -3 AND -4.

DASH NO	A MAX DIA	B DIA	C +.050 -.000	D ±.005 RAD
-1	12.000	8.125	.125	5.125
-2	17.375	12.375	.125	7.125
-3	12.000	8.125	.125	5.125
-4	17.375	12.375	.125	7.125

(B) MATERIAL HEAT RESISTANT SILICONE RUBBER, CLASS IIa, GRADE 60, PER ZZ R 765

MINIMUM MARKING MS PART NO. AND MANUFACTURER'S NAME, ABBREVIATION OR TRADE MARK PER MIL STD 130.

DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES DECIMALS ± .031, FRACTIONS ± 1/64.

MS26577 FOR USE WITH MS24526 BASE

(B) DASH 1 AND DASH 2 INACTIVE FOR NEW DESIGN

INTERCHANGEABILITY RELATIONSHIP MS26577 1 PARTS SUPERSEDE AN2510 1 PARTS AND ARE UNIVERSALLY, FUNCTIONALLY AND DIMENSIONALLY INTERCHANGEABLE.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

USER ACTIVITIES
DSA - IS
REVIEW ACTIVITIES
USAF 11 IS
Navy AS
Army ME

APPROVED 6 May 64 REVISED (A) 23 Mar 66 (B) 6 Oct 71

P.A. USAF - 82
Other Cust
Navy - AS (B)
Army ME

TITLE
GASKET AIRPORT MARKER LIGHT BASE

MILITARY STANDARD
MS26577

PROCUREMENT SPECIFICATION
SUPERSEDES AN2510

SHEET 1 OF 1

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repairive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 20261O-23T15:13Z
Check the source to verify that this is the currenversion before use.