PROJECT NO. 6685-0546

FED. SUP CLASS
6685


USER SYMBOLS:
ARMY--MU

REVIEWER SYMBOLS:
ARMY--AV
NAVY--OS

CLEARANCE FOR A SOCKET OF THE FOLLOWING DESCRIPTION: 12 POINT, 1/2 SQUARE DRIVE, 7/8 WRENCH OPENING, EXTRA DEEP, CONFORMING TO SPECIFICATION GGG W-641, TYPE I, CLASS 2. EXCEPT DEPTH OF OPENING, NUT END TO BE .812 MIN AND DIA OF BOLT CLEARANCE HOLE TO BE .844 MIN

THREADS TO PROVIDE A SATISFACTORY FIT IN A 18-1.5 MM THREADED BOSS HAVING:

PITCH DIA	MAX.	.6743
	MIN.	.6713
MINOR DIA	MAX.	.6472
	MIN.	.6404
MAJOR DIA	MIN.	.7097

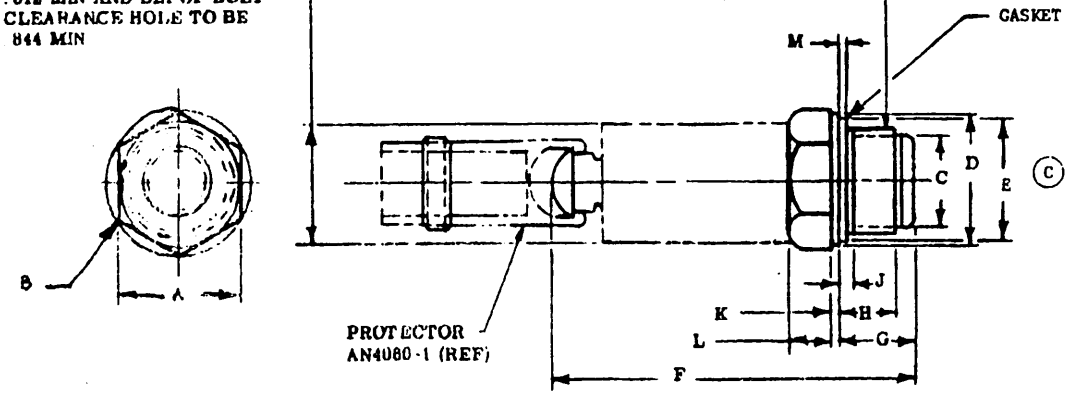

TOP OF PLUG TO BE SO CONSTRUCTED TO PROVIDE A SNAP AND SECURE FIT FOR THE CABLE PROTECTOR, AND ALLOW IT A CIRCULAR MOVEMENT OF 15° ABOUT THE LONGITUDINAL AXIS OF THE PLUG

DASH NO	TYPE	A +.003 -.010 HEX	B MAX RAD	C MAX DIA	D SEAT MAX DIA	E GASKET MAX DIA	F MAX	G +.020 -.010	H +.010 -.020	J +.020 -.000 UNTHREADED	K MIN	L MIN	M +.000 -.020
-1	I REUSABLE	.875	.120	.628	1.100	1.000	2.940	.600	.420	.060	.060	.250	.070
2	II REUSABLE AND REFILLABLE	.875	.120	.628	1.100	1.000	2.940	.562	.380	.094	.060	.250	.125

NOTES:

1. SEATING TORQUE TO BE 25 LB-IN. MAXIMUM.
2. PROOF TORQUE TO BE 50 LB-IN. MINIMUM.
3. PLUGS SHALL BE FILLED WITH A MINIMUM OF 6 GRAMS FOR TYPE I AND A MINIMUM OF 5 GRAMS FOR TYPE II OF DESICCANT CONFORMING TO MIL-D-3716, TYPE IV, GRADE H.
4. DIMENSIONS IN INCHES.

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) REVISED

APPROVED 17 AUG 1962 REVISED (A) 15 JUL 69 (B) 31 DEC 70 (C) 20 FEB 75

P.A. NAVY - AS Other Cust USAF - 62 ARMY ME	TITLE PLUG, DEHYDRATOR, HUMIDITY INDICATING, ENGINE CYLINDER, 18 MM THREAD	MILITARY STANDARD MS27215
PROCUREMENT SPECIFICATION MIL-P-6131	SUPERSEDES AN4062	SHEET 1 OF 1

DD FORM 672-1 (Cover sheet)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft should be based on the information in the current DODISS."

This military standard is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use should be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:18Z
Check the source to verify that this is the current version before use.