
FSC CLASS
4730

User Activities:
Army-WC, ME, MI

Review Activities:
Army-AV
Navy-AS
Air Force-82

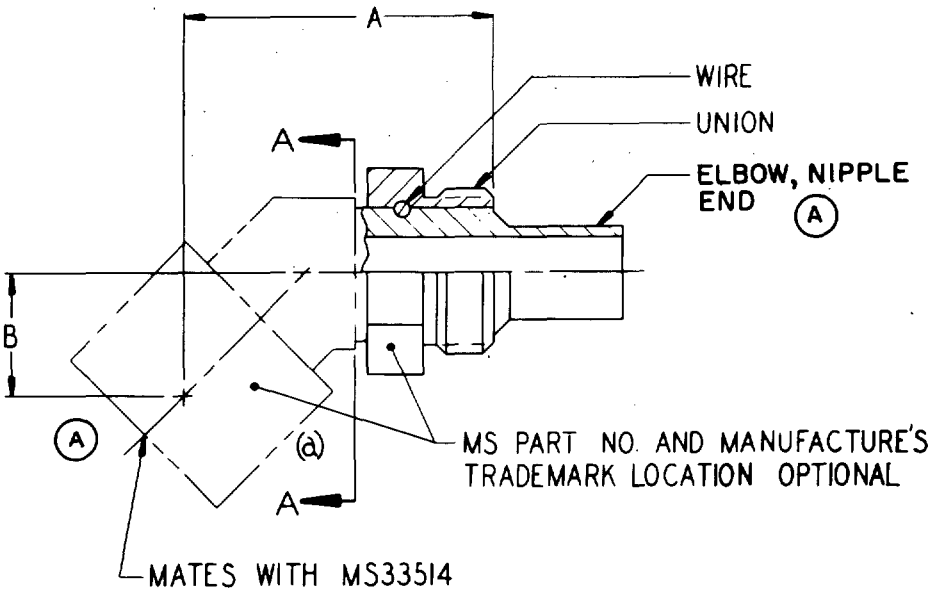

MS PART NO.	WIRE	(A) UNION NIPPLE	(A) ELBOW, NIPPLE END	A ± .020	B ± .020
(b) MS27389-3/-4C (A)	MS27072-4C	MS27071-4C	MS27395-3/-4C	1.227	.432
MS27389-4C			MS27395-4C	1.219	.424
MS27389-5C	MS27072-5C	MS27071-5C	MS27395-5C	1.258	.448
MS27389-6C	MS27072-6C	MS27071-6C	MS27395-6C	1.361	.526
MS27389-8C	MS27072-8C	MS27071-8C	MS27395-8C	1.877	.622
MS27389-8			MS27395-8D		

(A) "A" IS THE DIMENSION BETWEEN THE HOSE END OF THE THREADED SECTION OF THE UNION AND THE FREE END OF THE INSERT AT ITS CENTERLINE.

(A) "B" IS THE DIMENSION BETWEEN THE CENTERLINE OF THE NIPPLE AND THE FREE END OF THE INSERT AT ITS CENTERLINE.

(A) FOR CHANGES SEE SHEET 1.

APPROVED 2 May 66 REVISED (A) 30 Jun 72

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

P.A. Air Force-11 (A) Other Cust Army-AV Navy-AS	ELBOW SUB ASSEMBLY, FLARELESS, 45° FORGED, SWIVEL NUT	MILITARY STANDARD MS27389
Procurement Specification MIL-F-27272	SUPERSEDES	SHEET 1 OF 2

DD FORM SEP 64 672

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4730

MATERIAL: SUFFIX "C": CORROSION RESISTING STEEL. SUFFIX "D": ALUMINUM ALLOY. NO SUFFIX: COMBINATION OF ALUMINUM ALLOY AND CORROSION RESISTING STEEL. SEE MS STANDARDS LISTED ON SHEET 1 FOR MATERIAL SPECIFICATIONS.
CORROSION RESISTING STEEL: DO NOT PASSIVATE. ALUMINUM ALLOY: ANODIZE SPECIFICATION MIL-A-8625, TYPE II, DYE YELLOW.

THESE PARTS FOR USE WITH MIL-H-27267 HOSE.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

ANY FORGED DESIGN OF ADAPTER COMPONENTS TO THE LEFT OF PLANE A-A IS ACCEPTABLE PROVIDED: DIM'S "A" AND "B", THE MATERIALS SPECIFIED, THE FABRICATION NOTES OF THIS STANDARD AND REQUIREMENTS OF THE PROCUREMENT SPECIFICATION ARE MET.

(a) IF REQUIRED, LOCKWIRE HOLES TO BE DRILLED IN ACCORDANCE WITH AS1043 AND SUFFIX "L" ADDED TO PART NUMBER. EXAMPLE: MS27389-8CL.

(b) SWIVEL NUT AND SEALING SURFACE OF ELBOW SHALL MATE WITH MS33514-3 FITTING. THE REMAINING PORTION OF THE ASSEMBLY SHALL MATE WITH MIL-H-27267-4 HOSE.

NEXT ASSEMBLY MS27384.

APPROVED 2 May 66 REVISED (A) FOR CHANGES SEE SHEET 1.

P.A. Air Force-11 (A)	TITLE ELBOW SUB ASSEMBLY, FLARELESS, 45° FORGED, SWIVEL NUT	MILITARY STANDARD MS27389
Other Cust Army-AV Navy-AS		
Procurement Specification MIL-F-27272	SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

User Activities: Army-WC, ME, MI

Review Activities: Army-AV, Navy-AS, Air Force-82

This military standard is approved by the Department of Defense and is mandatory for all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

NOTE: The Government has a royalty free license under the following listed patents for the benefit of Manufacturers of the item either for the Government or for use in equipment to be delivered to the Government. (U.S. Patent Nos. 2,833,567; 3,044,163; 3,055,682)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:22Z
Check the source to verify that this is the current version before use.