FED. SUP CLASS
4920

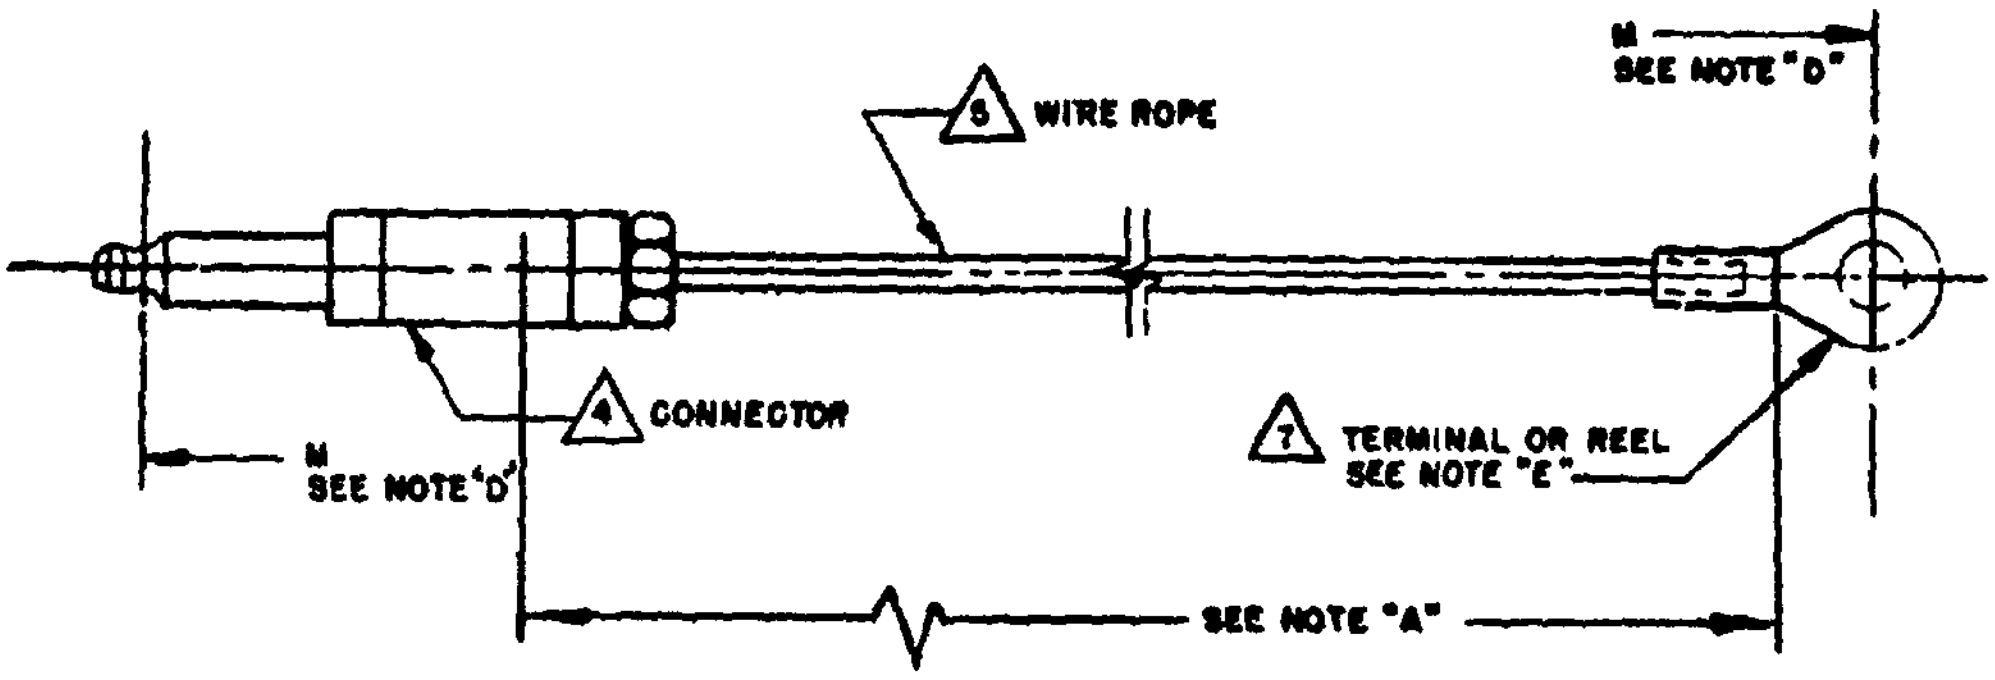

1 AIRCRAFT TO AGE CABLE CONFIGURATION

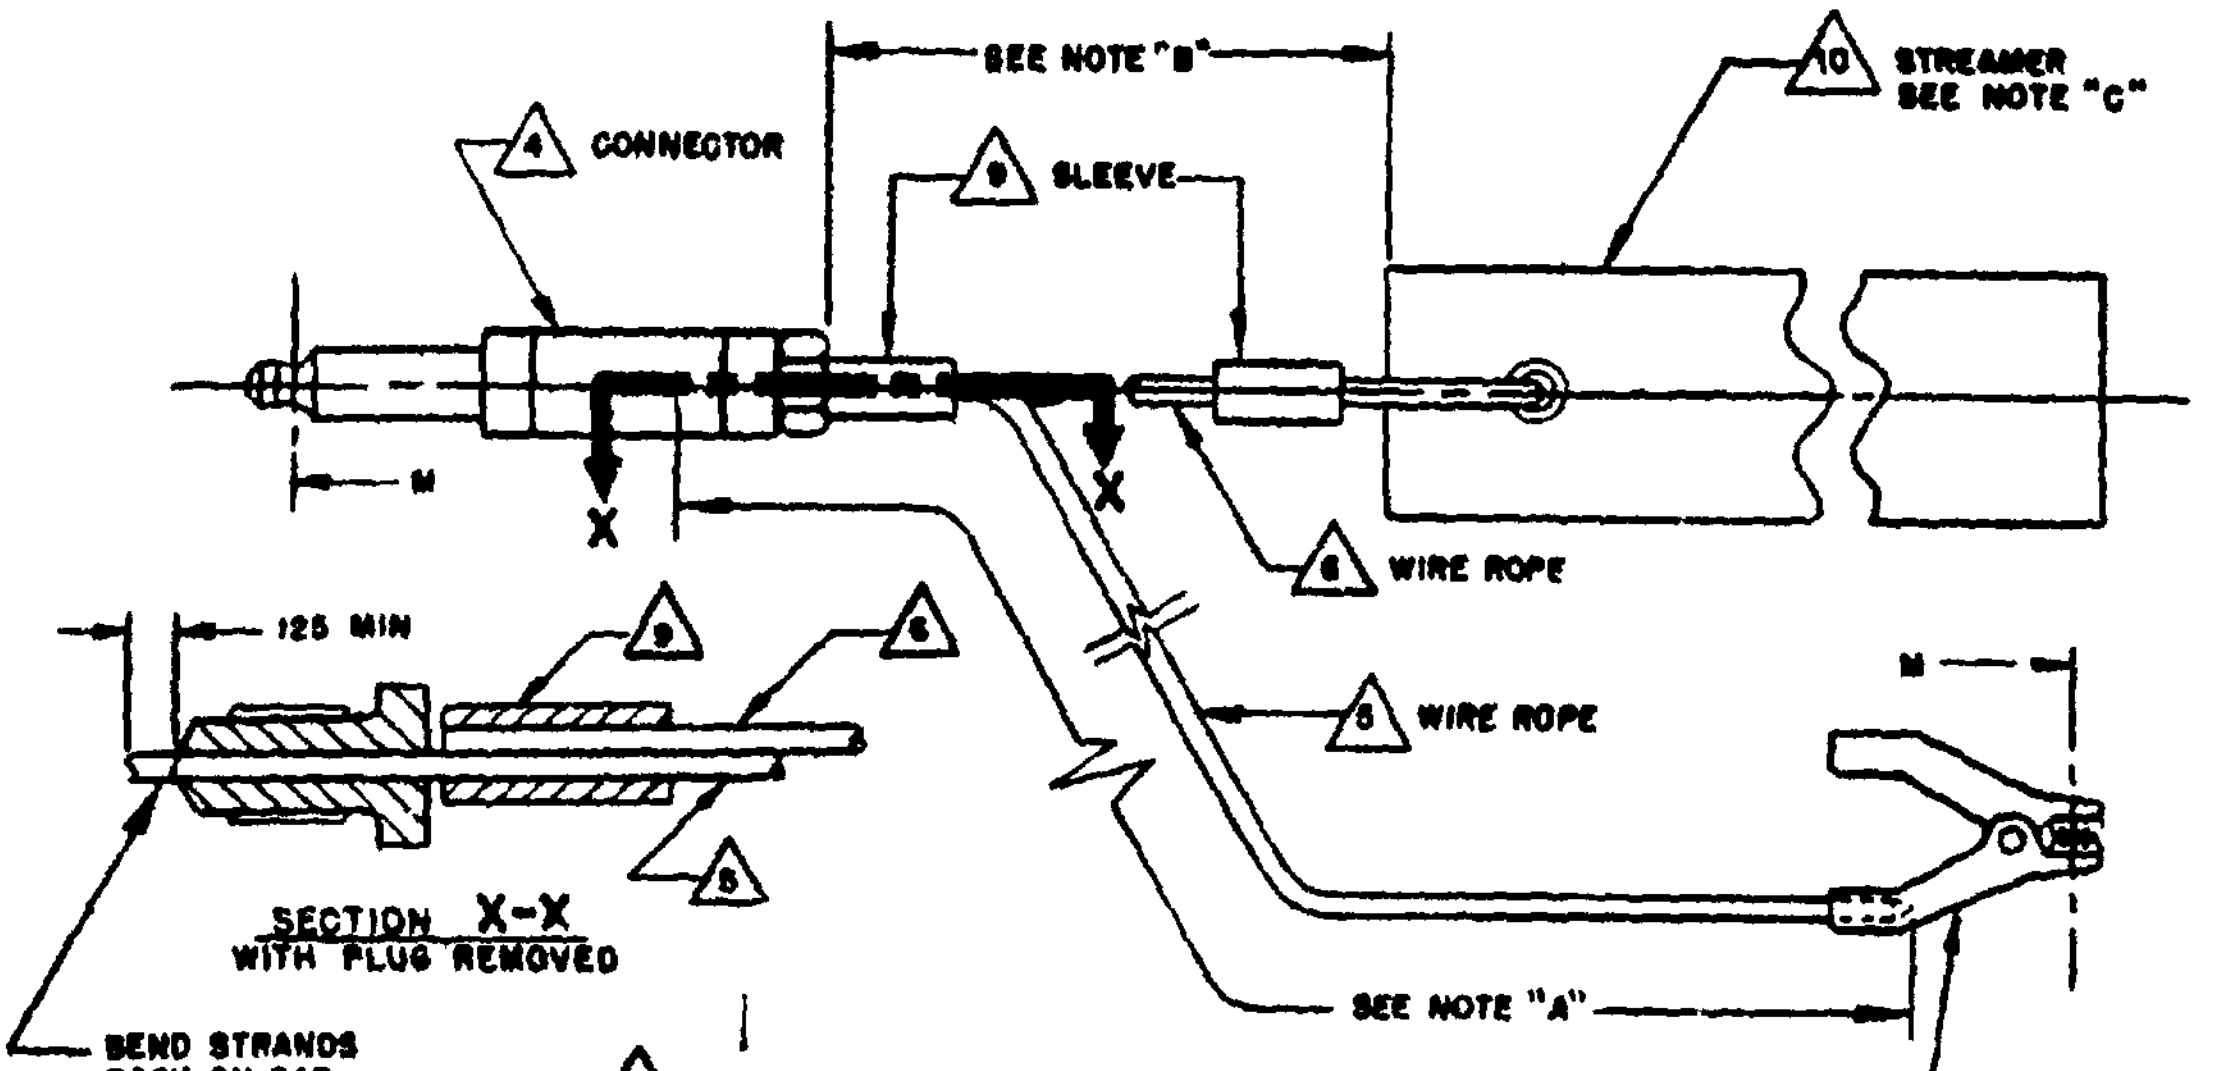

2 AIRCRAFT TO EARTH GROUND CABLE CONFIGURATION
(SEE NOTE "E")

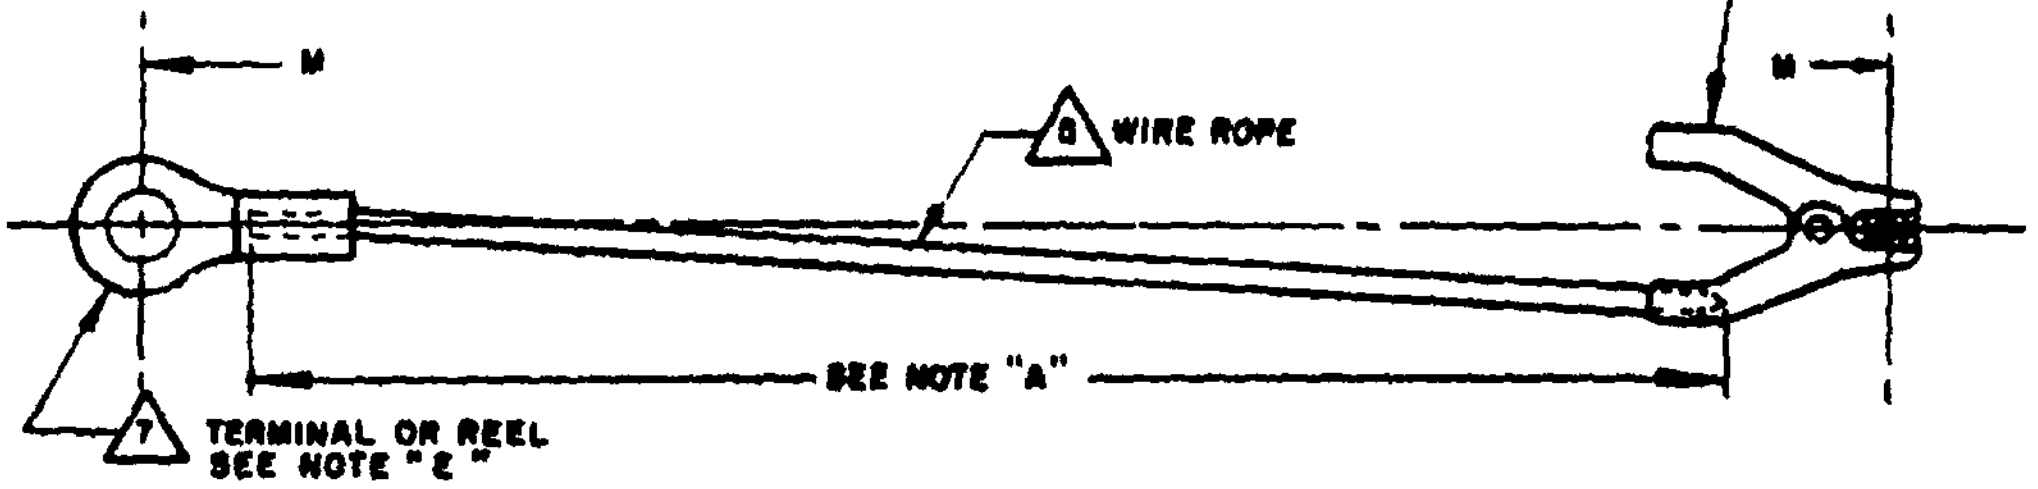

3 AGE TO EARTH GROUND CABLE CONFIGURATION

(B) ENTIRE STANDARD REVISED

THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

User activity:
Army - ME

Review activities:
Air Force - 68, 70, 80, 82, 84
Army - AV
Navy - AS

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 28 Jul 69 REVISED (A) 15 Mar 70 (B) 4 Feb 72

P.A. AIR FORCE - 11 Other Cust Army - AV Navy - AS	TITLE CABLE CONFIGURATIONS, GROUNDING, AIRCRAFT AND AGE	MILITARY STANDARD MS27574
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
4920

ITEM	DESCRIPTION	PART OR SPECIFICATION
△1	AIRCRAFT TO AGE CABLE CONFIGURATION	
△2	AIRCRAFT TO EARTH GROUND CABLE CONFIGURATION	
△3	AGE TO EARTH GROUND CABLE CONFIGURATION	
△4	CONNECTOR, PLUG, AND CAP, ELECTRIC, GROUNDING (MATES WITH AIRCRAFT INSTALLED RECEPTACLE MS90298-2)	MS3493-3
△5,6	WIRE ROPE TO BE 7 BY 7 CONSTRUCTION, .094 NOM. DIA WITH TRANSLUCENT 1/37 INCH THICK PLASTIC COATING, COLOR INTERNATIONAL ORANGE IN ACCORDANCE WITH FED-STD-595, COLOR 12197 IF COATED WIRE ROPE IS NOT AVAILABLE, USE UNCOATED WIRE ROPE WITH SUITABLE PLASTIC SHEATHING OR SLEEVING.	
	PREFERRED -- WIRE ROPE, STEEL (CORROSION-RESISTING) FLEXIBLE, PREFORMED (FOR AERONAUTICAL USE) ALTERNATE -- WIRE ROPE, STEEL (CARBON) FLEXIBLE, PREFORMED	MIL-W-5424 (OR EQUAL) MIL-W-1511 (OR EQUAL)
△7	TERMINAL, LUG, CRIMP STYLE, COPPER, UNINSULATED, RING TONGUE, TYPE 1, CLASS 1 (SIZE TO SUIT)	MS20659 (OR EQUAL)
△8	CONNECTOR, ELECTRICAL, GROUND	MS27610
△9	SLEEVE -- CUT CRIMP END FROM TERMINAL LUG (SIZE TO SUIT) SWAGE SECURELY	MS20659 (AS MODIFIED OR EQUAL)
△10	STREAMER, WARNING	MS51700-36 EXISTING STREAMERS IN ACCORDANCE WITH NAS1089 MAY BE USED UNTIL CURRENT SUPPLY IS EXHAUSTED

NOTES

A. LENGTH SHALL BE DETERMINED BY USER REQUIREMENTS. LENGTH SHALL BE CONTINUOUS, SPLICES ARE PROHIBITED (SEE NOTE D).

B LENGTH AS NECESSARY TO PERMIT A MINIMUM OF 24 INCHES OF STREAMER TO BE VISIBLE OUTSIDE AIRCRAFT MAXIMUM LENGTH OF ATTACHING CABLE AND STREAMER SHALL NOT PERMIT ENTANGLEMENT WITH AIRCRAFT ROTORS, PROPELLERS, OR ENGINE INLETS. LENGTH OF CABLE ≈ B + 3 IN.

C. WARNING STREAMER ROPE SHALL BE SECURELY ATTACHED NEAR △4 CONNECTOR.

D. MAXIMUM PERMISSIBLE RESISTANCE BETWEEN CONTACT POINTS M = 5 OHMS

E. FOR AGE, IF REELS ARE NOT USED, THE USER SHALL PROVIDE BRACKETS OR OTHER SUITABLE MEANS TO STOW THE CABLE

F. ALLIGATOR CLIPS SHALL NOT BE USED.

G. USE OF STREAMER LENGTHS OTHER THAN AS SHOWN SHALL BE APPROVED BY APPROPRIATE USING COMMAND HEADQUARTERS.

User activity
Army - ME

Review activities,
Air Force - 68, 70, 80, 82, 84
Army - AV
Navy - AS

This military standard is approved by the Department of Defense and is mandatory to all activities. Selection for all new engineering and design applications or repetitive use shall be made from this document.

28 Jul 69 REVISED (R) FOR CHANGES SEE SHEETS 1 AND 2

P.A. AIR FORCE - 11 Other Cust ARMY - AV NAVY - AS	TITLE CABLE, GROUNDING, AIRCRAFT AND AGE	**MILITARY STANDARD** **MS27574**
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 2 OF

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:44Z
Check the source to verify that this is the current version before use.