
FED. TYP. CLASS
1560

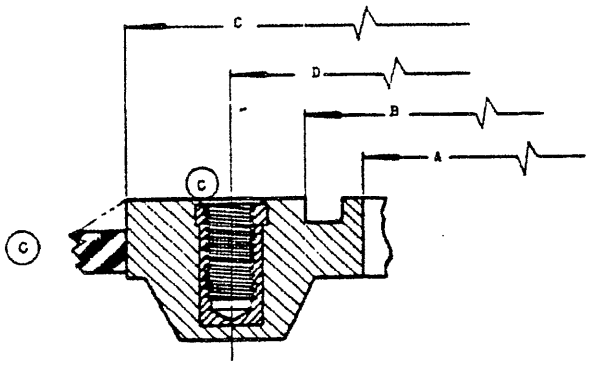

PLAIN GROOVE				GRIP GROOVE				A +.020 -.010 ID	B DIA		C +.020 -.010 DIA	D ±.010 DIA	(b) NUMBER OF INSERTS
TYPE I		TYPE II		TYPE I		TYPE II			MAX	MIN			
DASH NO. (a)	FLIN	DASH NO. (a)	FLIN	DASH NO. (a)	FLIN	DASH NO. (a)	FLIN						
-220		-220A		G220		G220A		1.000	1.637	1.621	3.250	2.250	4
-223		-223A		G223		G223A		1.250	1.887	1.868	3.500	2.500	
-225		-225A		G225		G225A		1.500	2.137	2.116	3.750	2.750	
-227		-227A		G227		G227A		1.750	2.387	2.363	4.000	3.000	
-229		-229A		G229		G229A		2.000	2.637	2.611	4.250	3.250	
-231		-231A		G231		G231A		2.250	2.887	2.858	4.500	3.500	
-233		-233A		G233		G233A		2.500	3.137	3.106	4.750	3.750	6
-235		-235A		G235		G235A		2.750	3.387	3.353	5.000	4.000	
-237		-237A		G237		G237A		3.000	3.637	3.601	5.250	4.250	
-241		-241A		G241		G241A		3.500	4.137	4.096	5.750	4.750	
-245		-245A		G245		G245A		4.000	4.637	4.591	6.250	5.250	8
-249		-249A		G249		G249A		4.500	5.137	5.086	6.750	5.750	
-253		-253A		G253		G253A		5.000	5.637	5.581	7.250	5.250	
-257		-257A		G257		G257A		5.500	6.137	6.077	7.750	6.750	
-261		-261A		G261		G261A		(c)6.380	7.012	6.952	8.630	7.750	10

(a) DASH NUMBERS SHOWN ARE IDENTICAL TO THE APPLICABLE "O" RING DASH NUMBERS SHOWN ON STANDARD MS29513.

FOR ADDITIONAL FLANGE SIZES LARGER THAN THOSE SHOWN: DIA A INCREASES IN INCREMENTS OF .500 FROM 5.500.

ESTABLISH "O" RING TO BE USED BY ADDING .234 TO THE A DIMENSION. THIS FIGURE WILL EQUAL THE NOMINAL "O" RING ID.

DIMENSION D EQUALS A +1.250.

DIMENSIONS IN INCHES.

(b) INSERTS SHALL BE EQUALLY SPACED.

(C) "O" RING GROOVE IN ACCORDANCE WITH MS33581. INSERTS DESIGN OPTIONAL.

(c) CHANGED TO CONFORM TO AN EXISTING PUMP FLANGE STANDARD.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 10 Apr 57 REVISED (A) 24 Feb 58 (B) 27 May 59 (C) 30 AUG 74

REVIEWER: AIR FORCE - 80, 82

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. AIR FORCE -11 Other Cust Army - Navy - AS	TITLE (C) FITTING, "O" RING, CIRCULAR, THREADED INSERT TYPE, SINGLE GROOVE, TANK	MILITARY STANDARD MS29560
PROCUREMENT SPECIFICATION MIL-F-6396	SUPERSEDES	SHEET 1 OF 1

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:02Z
Check the source to verify that this is the current version before use.