FED SUP CLASS
5935

CONTACT SHALL BE AS SPECIFIED IN MIL-S-12883, EXCEPT THAT SILVER UNDER PLATING SHALL NOT BE USED.

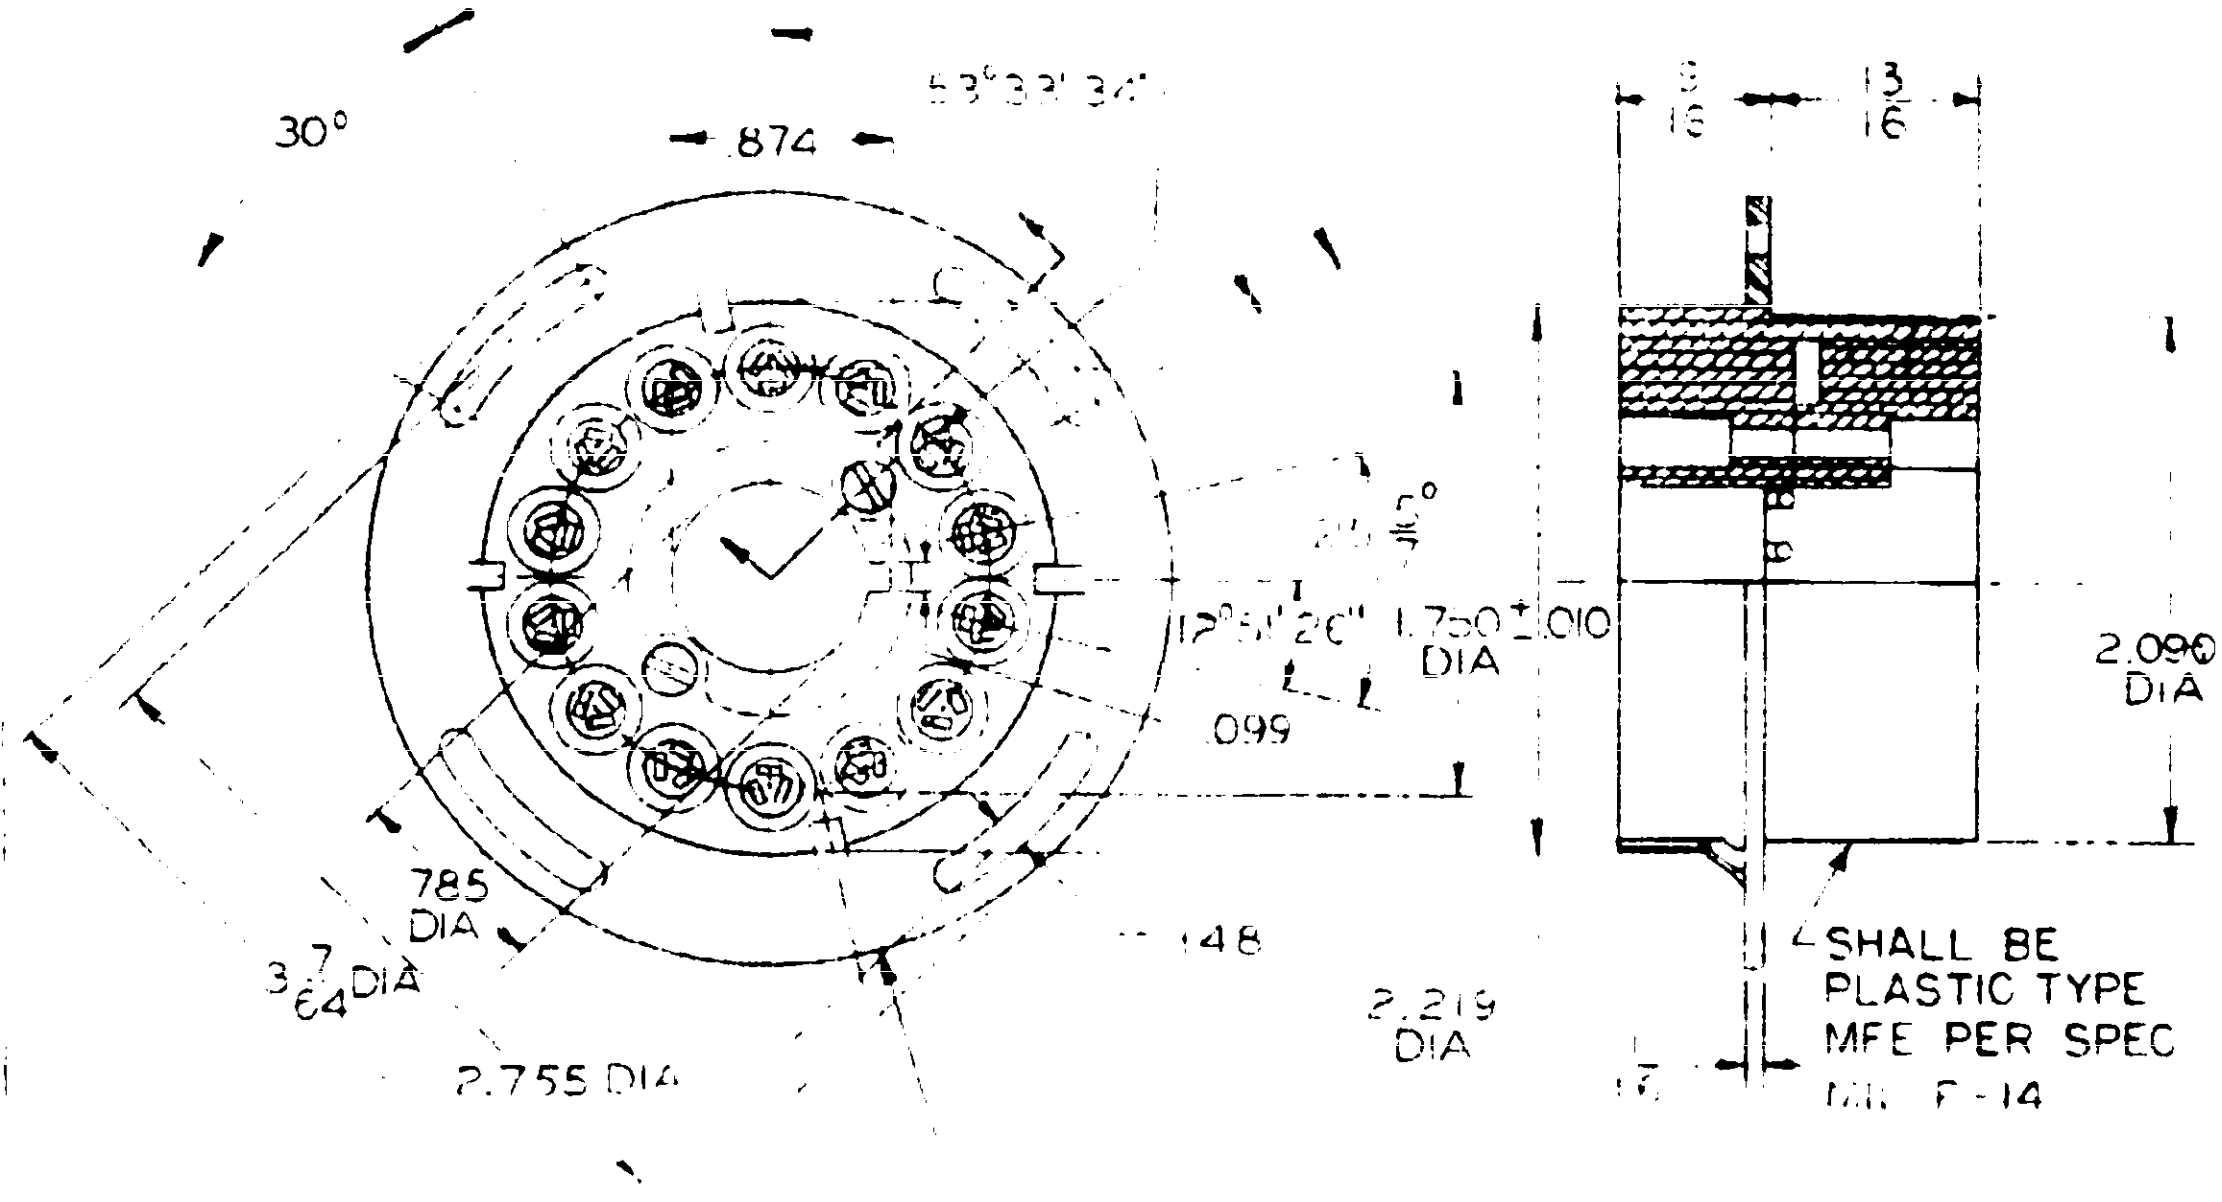

MOUNTING SADDLE SHALL BE STEEL, WITH ZINC OR CADMIUM COATING PER MIL-F-14072(SIG C), TABLE II, TYPE . FINISH SHALL CONFORM TO ONE OF THE APPROPRIATE METHODS (M224, M225, M226, M227 or M228) SPECIFIED IN MIL-F-14072(SIG C)

14 CONTACTS

NOTES

1. ALL DIMENSIONS IN INCHES.
2. TOLERANCES ON FRACTIONAL DIMENSIONS SHALL BE ± 1/64, ANGULAR DIMENSIONS ± 1/2° (14 HOLES EQUALLY SPACED AND EACH HOLE AND SLOT LOCATED WITHIN 1/2° OF TRUE POSITION), DECIMAL DIMENSIONS .005, UNLESS OTHERWISE SPECIFIED.
3. THIS SOCKET SHALL ACCOMMODATE TUBE TYPES SUCH AS 5CP1A, 5AQP, 5ADP, AND 5AFP, PER SPECIFICATION MIL-E-1, FIG. B12-57.
4. THIS SOCKET SHALL BE MOLDED WITH THE MANUFACTURERS' NAME OR SYMBOL AND THE NUMBERS IDENTIFYING THE CONTACTS. THE NUMBERING SHALL CORRESPOND TO THE TUBE BASE NUMBERING GIVEN IN SPECIFICATION MIL-E-1.
5. THE SOCKET SHALL BE IN ACCORDANCE WITH THE GENERAL REQUIREMENTS OF SPECIFICATION MIL-S-12883 EXCEPT WHERE THIS STANDARD IS IN CONFLICT WITH THE SPECIFICATION. IN THIS INSTANCE, THIS STANDARD SHALL APPLY.

ENTIRE STANDARD REVISED (REVISION (A) CANCELLED THE STANDARD, REVISION (B) REINSTATES)

APPROVED 24 JULY 1951 REVISED (A) 16 SEPTEMBER 1964 (B) 21 August [illegible]

P A EL	TITLE	MILITARY STANDARD
	SOCKET, ELECTRON TUBE (WITH SADDLE)	MS 35090(EL)
PROCUREMENT SPECIFICATION MIL-S-12883	SUPERSEDES	SHEET 1 OF 1

This standard has been approved by the Department of the ARMY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

The user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC) listing:
AF Army MI + NCA + MD3 Navy

project 5935-A53C

Source: https://assist.dla.mil -- Downloaded: 202610-23T17:09Z
Check the source to verify that this is the currentversion before use.