


FED SUP CLASS
6220

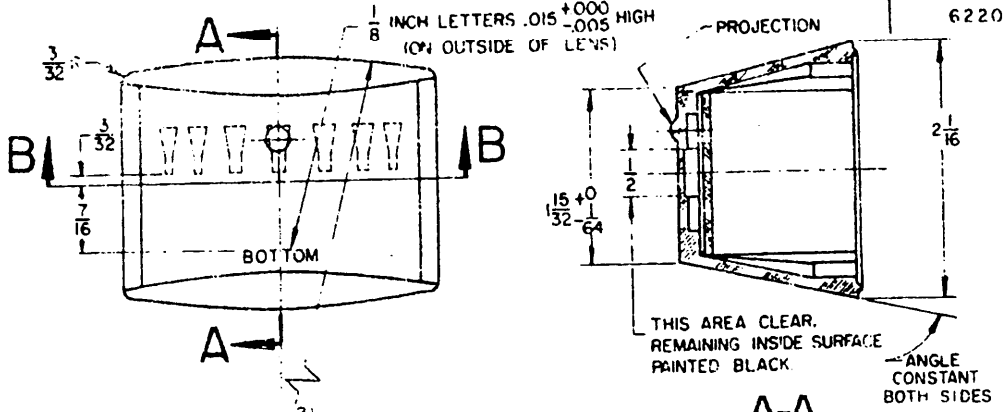


SECTION A-A

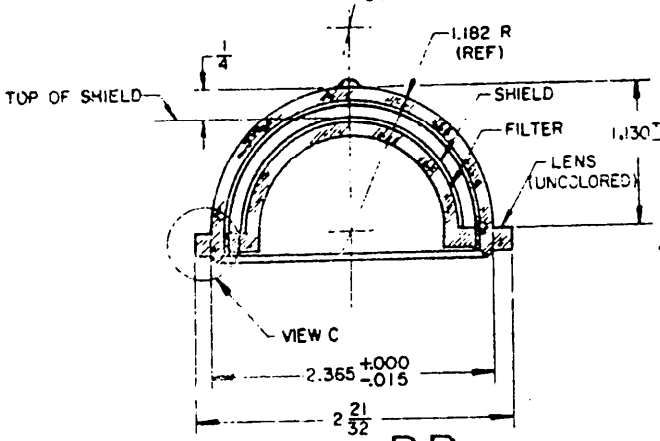

SECTION B-B

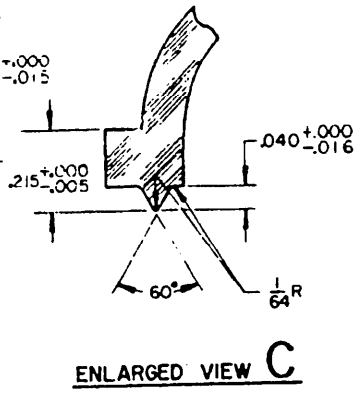

ENLARGED VIEW C



ENLARGED VIEW OF SHIELD APERTURE-7 REQ'D 22° 30' APART

MS PART NO	FORMER PART NO	FILTER COLOR
MS 35420-1	ORD 7525992	AMBER
MS 35420-2	ORD 7525993	RED

NOTES:

1. PROJECTION IS FOR ORIENTATION OF LENS DURING CHANGE OF LAMP UNDER BLACKOUT CONDITIONS. DIMENSIONS OPTIONAL.
2. SHIELD SHALL BE SECURELY CEMENTED TO FILTER. FILTER SHALL BE SECURELY CEMENTED TO LENS.
3. UNLESS OTHERWISE SPECIFIED, WALL THICKNESS SHALL BE .078, DRAFT ANGLE 2° MAX, 1/64 MAX RADIUS ON ALL CORNERS SHOWN SHARP.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES; ± 1/64 ON FRACTIONS; ± .005 ON DECIMALS.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Ⓐ ENTIRE STANDARD REVISED

APPROVED 23 FEBRUARY 1955 REVISED Ⓐ 22 AUGUST 1962

F A Ord Other Cust Navy-MC AF-MEM PROCUREMENT SPECIFICATION	TITLE LENS, CLEARANCE MARKER LIGHT, BLACKOUT SUPERSEDES	MILITARY STANDARD MS 35420 SHEET 1 OF 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:22Z
Check the source to verify that this is the current version before use.