FED. SUP CLASS
5305

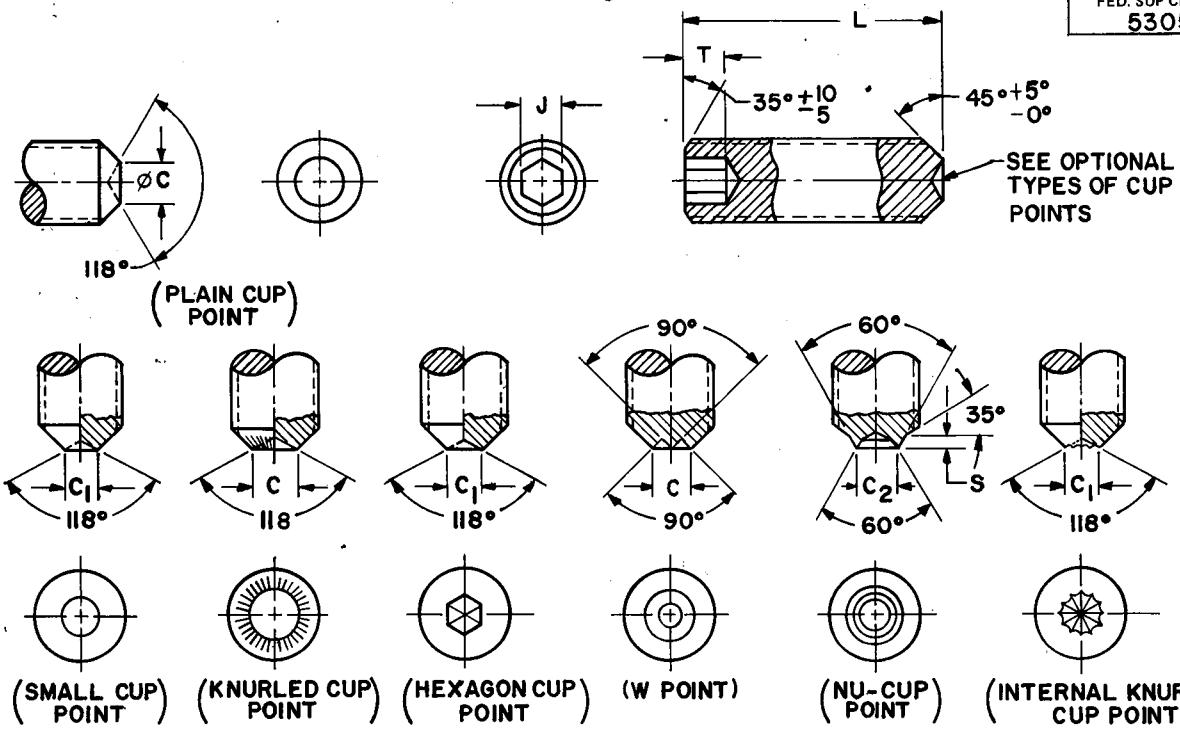


TABLE I. DIMENSIONS AND PART NUMBERS.

NOMINAL SIZE			.190	.250	.3125	.375
THREADS PER INCH UNF - 3A			32	28	24	24
J - SOCKET WIDTH ACROSS FLATS		NOM	.094	.125	.156	.188
Ø C - POINT DIAMETER		MAX	.102	.132	.172	.212
		MIN	.088	.118	.156	.194
Ø C_1 - POINT DIAMETER		MAX	.095	.125	.156	.187
		MIN	.086	.114	.144	.174
Ø C_2 - POINT DIAMETER		MAX	.101	.156	.190	.241
		MIN	.095	.150	.185	.236
T - KEY ENGAGEMENT		MIN	.100	.125	.156	.188
S - POINT LENGTH		MAX	.024	.027	.038	.041
		MIN	.019	.022	.033	.036
L - LENGTH	TOLERANCE		DASH NO	DASH NO	DASH NO	DASH NO
.250	±.010		1	3	5	
.375						6
.500			2	4		

USER ACTIVITIES:
ARMY-ME,MI
NAVY-MC,OS

REVIEWER ACTIVITIES:
ARMY-EA
AIR FORCE-82
DLA-IS
NSA-NS

REVISED
APPROVED 1 AUG 84

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust AR SH 99		SETSCREW, HEXAGON SOCKET, CUP POINT, ALLOY STEEL, UNF-3A	MS51477
PROCUREMENT SPECIFICATION: FF-S-200	SUPERSEDES:		PAGE 1 OF 2

DD FORM 1 MAY 73 672-1 (CHECK ONE) PREVIOUS EDITIONS OBSOLETE

5305-1483

Source: https://assist.dla.mil -- Downloaded: 2026-0-23T18:022
Check this source to verify that this is the current version before use.

FED. SUP CLASS
5305

REQUIREMENTS:

1. MATERIAL. ALLOY STEEL IN ACCORDANCE WITH PROCUREMENT SPECIFICATION.
2. HARDNESS. 45-53HRC
3. FINISH. ZINC COATING IN ACCORDANCE WITH ASTM B633-78, $Fe/Zn5$ (5 µm), TYPE II.
4. THREADS. THE THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2. ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 21.
5. PART NUMBER. THE BASIC PART NUMBER IS FOLLOWED BY A DASH NUMBER FROM TABLE I.

   EXAMPLE: MS51477-1 - SETSCREW, HEXAGON SOCKET, CUP POINT, ALLOY STEEL, .190-32UNF-3A, LENGTH .250, ZINC COATED

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. TOLERANCE OF ANGLES $\pm 5^{\circ}$ UNLESS OTHERWISE SPECIFIED.
3. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
4. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

USER ACTIVITIES:
ARMY-ME,MI
NAVY-MC,OS

REVIEWER ACTIVITIES:
ARMY-EA
AIR FORCE-82
DLA-IS
NSA-NS

APPROVED 1 AUG 84 REVISED

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AR / Other Cust SH 99	INTERNATIONAL INTEREST	TITLE: SETSCREW, HEXAGON SOCKET, CUP POINT, ALLOY STEEL, UNF-3A	MILITARY STANDARD MS51477
PROCUREMENT SPECIFICATION: FF-S-200	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 MAY 73 672-1 COORDINATED PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5305-1483

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:02Z
Check the source to verify that this is the current version before use.