FED SUP CLASS
5310

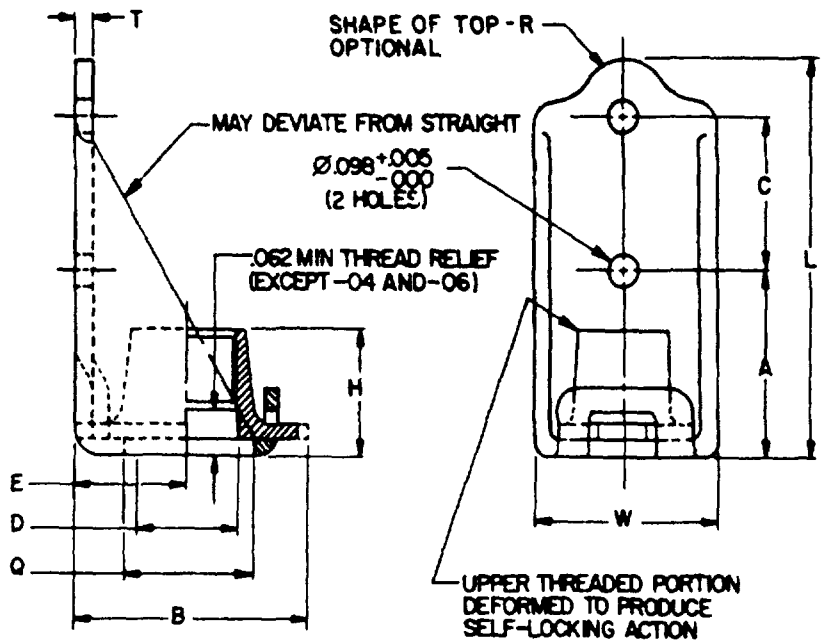


TABLE I

THREAD SIZE	A ± .005	B (MAX)	C ± .002	D (MIN)	E ± .005	H (MAX)	L (MAX)	Q (REF)	T +.010 -.005	W (MAX)	AXIAL STRENGTH LBS/MIN	APPROX WEIGHT LBS/100
1120-40UNJC-3B	325	347	219	-	170	153	684	.180	.025	325	750	30
1380-32UNJC-3B	325	347	219	-	170	170	684	180	025	325	1,130	32
1640-32UNJC-3B	375	425	219	168	210	250	734	230	032	415	1,720	52
1900-32UNJF-3B	375	425	219	194	210	250	734	230	032	415	2,460	54

TABLE II DASH NUMBERS

THREAD SIZE	DASH NUMBERS		
	STEEL		CRES
	NON DRY FILM LUBE	DRY FILM LUBE	DRY FILM LUBE
1120-40UNJC-3B	N04	L04	CL04
1380-32UNJC-3B	N06	L06	CL06
1640-32UNJC-3B	N08	L08	CL08
1900-32UNJF-3B	N3	L3	CL3

APPROVED 15 SEP 87 REVISED

PA ARMY-AR	INTERNATIONAL INTEREST	TITLE NUT, SELF-LOCKING, PLATE, RIGHT ANGLE FLOATING, 125 KSI Ftu 450°F	MILITARY STANDARD MS51552
Other Cust NAVY-AS AIR FORCE-99			
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES		PAGE 1 OF 2

DD FORM 672-1 (COORDINATED) 5310-1461

USER ACTIVITIES
AIR FORCE - 80 - 84

REVIEWER ACTIVITIES
ARMY-AT, AV, CR, ER, MI
DLA - IS

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Use for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5310

REQUIREMENTS

1 MATERIAL CARBON STEEL, GRADES 1035 (UNS G10350), 1040 (UNS G10400) OR 1050 (UNS G10500) IN ACCORDANCE WITH ASTM A29
ALLOY STEEL, GRADES 4130 (UNS G41300), 4340 (UNS G43400), OR 8740 (UNS G87400) IN ACCORDANCE WITH ASTM A29
CORROSION-RESISTANT STEEL, NUT AND BASKET, TYPE A286 (UNS S66286) IN ACCORDANCE WITH AMS 5525, AMS 5732, AMS 5737, OR BASKET TYPE 321 (UNS S32100), IN ACCORDANCE WITH AMS 5510

2 PROTECTIVE COATING AND SURFACE TREATMENT STEEL NUTS, CADMIUM PLATE IN ACCORDANCE WITH QQ-P-416, TYPE II, CLASS 2 CRES NUTS SHALL BE CLEANED, DESCALED AND PASSIVATED IN ACCORDANCE WITH ASTM A380

3 HARDNESS 49 HRC, MAX

4 LUBRICANT MOLYBDENUM DISULFIDE DRY FILM LUBRICANT IN ACCORDANCE WITH MIL-M-25027 OTHER LUBRICANTS SOLUBLE IN CLEANER SPECIFIED IN THE PROCUREMENT SPECIFICATION
CRES NUTS LIMITED TO FIVE (5) REUSE CYCLES


5 SURFACE TEXTURE SURFACE TEXTURE SHALL NOT EXCEED 125 MICRO INCHES IN ACCORDANCE WITH ANSI/ASME B46.1

6 FLOAT OF NUT ELEMENT FLOAT OF NUT ELEMENT PORTION OF ASSEMBLY SHALL NOT BE LESS THAN .020 RADIALLY FROM CENTERED POSITION NUT ELEMENT SHALL BE CAPABLE OF ENGAGEMENT WITH BOLT IN THE MAXIMUM MISALIGNED POSITION

7 THREADS THREADS SHALL BE IN ACCORDANCE WITH MIL-S-8879 BEFORE LUBRICATION

8 PART NUMBERS THE PART NUMBER SHALL CONSIST OF THE BASIC MS SHEET NUMBER FOLLOWED BY A MATERIAL CODE AND DASH NUMBER FROM TABLE II

EXAMPLE MS51552CL3



MS51552CL3 - INDICATES NUT, SELF-LOCKING, PLATE, RIGHT ANGLE, CRES, 125 KSI Ftu, 450° DRY FILM LUBRICATED, THREAD SIZE, 1900-32 UNJF-3B

NOTES

1 DIMENSIONS IN INCHES, UNLESS OTHERWISE SPECIFIED

2 DESIGN AND USAGE LIMITATIONS THESE NUTS ARE DESIGNED TO DEVELOP THE TENSILE STRENGTH OF 125 KSI BASED ON THE CROSS SECTIONAL AREA AT THE BASIC ROOT DIAMETER OF THE THREAD THESE NUTS ARE DESIGNED TO BE USED WITH CLASS 3 THREADS THESE NUTS SHALL BE USED IN ACCORDANCE WITH THE LIMITATIONS OF MS33588

3 THERE IS NO QPL ASSOCIATED WITH MS51552

4 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

5 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

APPROVED 15 SEP 87 REVISED

PA ARMY-AR Other Cust NAVY-AS AIR FORCE-99	INTERNATIONAL INTEREST	TITLE NUT,SELF-LOCKING,PLATE,RIGHT ANGLE FLOATING,125 KSI Ftu, 450°F	MILITARY STANDARD MS51552
PROCUREMENT SPECIFICATION MIL-N-25027	SUPERSEDES		PAGE 2 OF 2

DD FORM 672-1 (REVERSE) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-1461

USER ACTIVITIES
AIR FORCE - 80, 84

REVIEWER ACTIVITIES
ARMY - AT, AV, CR, ER, MI
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:07Z
Check the source to verify that this is the current version before use.