
MS9212 (ASG)

FED SUP CLASS 5306

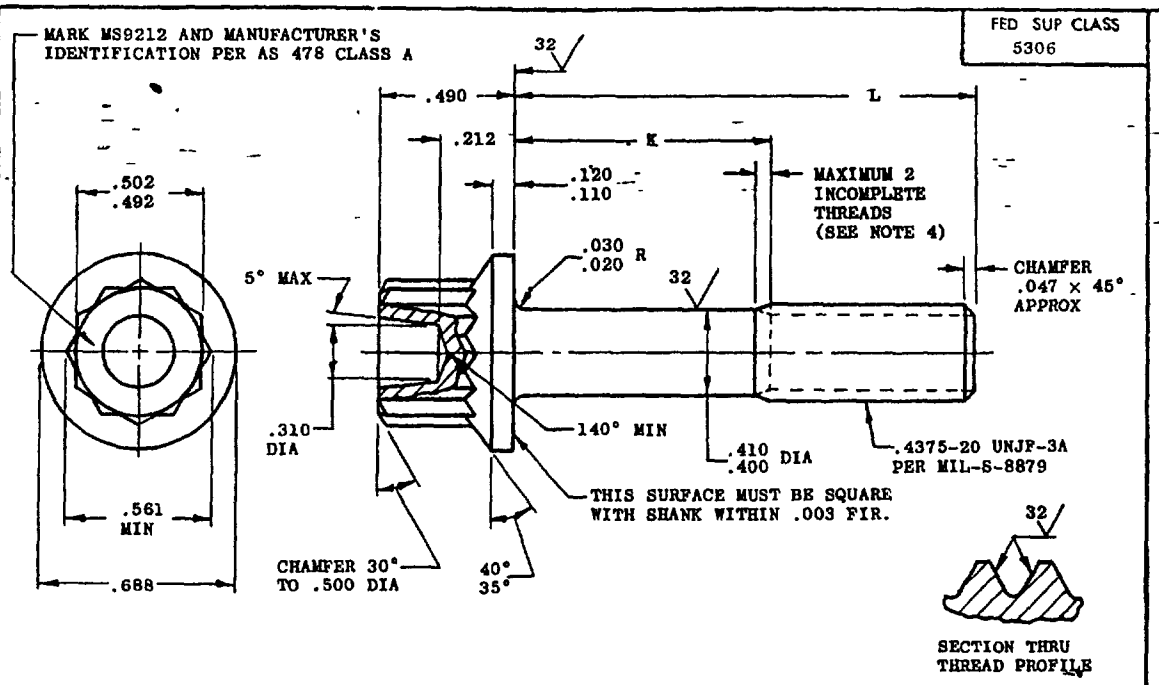

PART NO.	L	K	APPROX WEIGHT LB/100
MS9212-04	.688	.105- .125	5.05
MS9212-05	.750	.105- .125	5 28
MS9212-06	.812	.105- .125	5.51
MS9212-07	.875	105- .125	5.74
MS9212-08	.938	.105- .125	5.97
MS9212-09	1.000	.105- 125	6 20
MS9212-10	1.062	.105- .125	6.43
MS9212-11	1.125	105- .125	6.67
MS9212-12	1.188	.105- .125	6.90
MS9212-13	1.250	.125- .145	7.13
MS9212-14	1.312	.128- .188	7.36
MS9212-15	1.375	.190- .250	7.59
MS9212-16	1.438	252- .312	7.82
MS9212-17	1.500	.315- 375	8.05
MS9212-18	1.562	378- 438	8.27
MS9212-19	1.625	440- .500	8.50
MS9212-20	1.688	.502- .562	8.73
MS9212-21	1.750	565- .625	8.96

PART NO.	L	K	APPROX WEIGHT LB/100
MS9212-22	1.875	.690- .750	9.43
MS9212-23	2.000	.815- .875	9.90
MS9212-24	2.125	.940-1.000	10.38
MS9212-25	2.250	1.065-1.125	10.85
MS9212-26	2.375	1.190-1.250	11.32
MS9212-27	2.500	1.315-1.375	11.79
MS9212-28	2.625	1.440-1.500	12.26
MS9212-29	2.750	1.565-1.625	12.72
MS9212-30	2.875	1.690-1.750	13.19
MS9212-31	3.000	1.815-1.875	13.66
MS9212-32	3.125	1.940-2.000	14.12
MS9212-33	3.250	2.065-2.125	14.59
MS9212-34	3.375	2.190-2.250	15.06
MS9212-35	3.500	2.315-2.375	15.52
MS9212-36	3.625	2.440-2.500	15.99
MS9212-37	3 750	2.565-2.625	16.45
MS9212-38	3.875	2.690-2.750	16.92
MS9212-39	4.000	2 815-2 875	17 39

PART NO	L	K	APPROX WEIGHT LB/100
MS9212-40	4.125	2.940-3 000	17.85
MS9212-41	4 250	3.065-3.125	18.31
MS9212-42	4.375	3.190-3 250	18 75
MS9212-43	4.500	3.315-3.375	19.31
MS9212-44	4.625	3.440-3.500	19.66
MS9212-45	4.750	3.565-3.625	20.12
MS9212-46	4.875	3.690-3.750	20.59
MS9212-47	5.000	3.815-3.875	21.05
MS9212-48	5.125	3 940-4 000	21.51
MS9212-49	5.250	4.065-4 125	21.97
MS9212-50	5.375	4.190-4 250	22.33
MS9212-51	5.500	4.315-4.375	22.80
MS9212-52	5.625	4.440-4.500	23.27
MS9212-53	5 750	4.565-4.625	23.74
MS9212-54	5.875	4.690-4.750	24.21
MS9212-55	6.000	4.815-4 875	24.67

1. SHANK SHALL BE STRAIGHT WITHIN .0025 FIR. PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .019 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6304.
6. HARDNESS: ROCKWELL C42-46.
7. FINISH: DIFFUSED NICKEL-CADMIUM PLATE AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7459. PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
9. SURFACE ROUGHNESS: AS 291 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

REVISED
APPROVED 10 Dec 63

Reviewers and Users: USAF - ASD, Navy - Weps

This standard has been approved by the ASD (Department of the Air Force) and the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable

P.A USAF - ASD Cmer Cust Navy - Weps	TITLE BOLT, MACHINE - STEEL AMS 6304, DIFFUSED NICKEL-CADMIUM PLATED, DOUBLE HEXAGON EXTENDED WASHER HEAD, .4375-20 UNJF-3A	MILITARY STANDARD MS9212 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 JAN 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:13Z
Check the source to verify that this is the current version before use.