
MS9218 (ASG)

FED SUP CLASS
5306

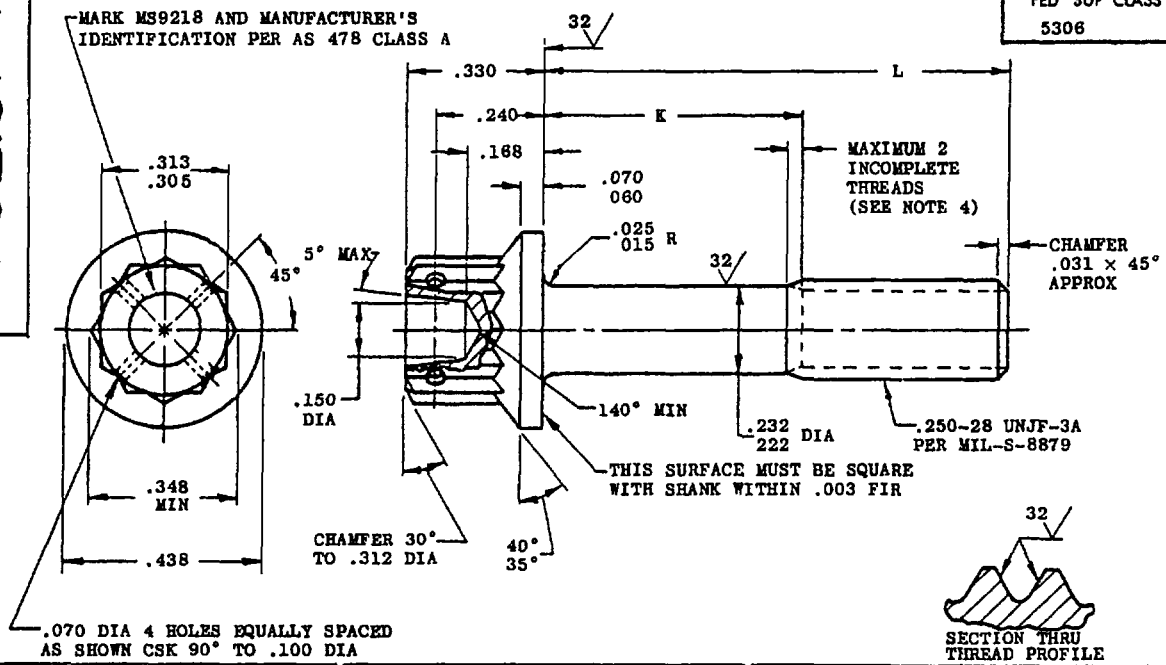

PART NO.	L	K	APPROX WEIGHT LB/100
MS9218-04	.375	.079-.099	1.14
MS9218-05	.438	079-.099	1.21
MS9218-06	.500	.079-.099	1.29
MS9218-07	.562	.079-.099	1.36
MS9218-08	.625	.079-.099	1.44
MS9218-09	.688	.079-.099	1.51
MS9218-10	.750	.079- 099	1.58
MS9218-11	.812	.079-.099	1.65
MS9218-12	.875	.125-.145	1.72
MS9218-13	.938	.128-.188	1.79
MS9218-14	1.000	.190-.250	1.86
MS9218-15	1.062	.252-.312	1.93
MS9218-16	1.125	.315-.375	2.00
MS9218-17	1.188	.378-.438	2.08
MS9218-18	1.250	.440-.500	2.15
MS9218-19	1.312	.502-.562	2.22
MS9218-20	1.375	.565-.625	2.29
MS9218-21	1.438	.628-.688	2.36

PART NO.	L	K	APPROX WEIGHT LB/100
MS9218-22	1.500	.690- .750	2.43
MS9218-23	1.562	752- .812	2.50
MS9218-24	1.625	.815- .875	2.57
MS9218-25	1.688	.878- .938	2.64
MS9218-26	1.750	.940-1.000	2.72
MS9218-27	1.875	1.065-1.125	2.86
MS9218-28	2.000	1.190-1 250	3.00
MS9218-29	2.125	1.315-1.375	3.14
MS9218-30	2.250	1.440-1.500	3.29
MS9218-31	2.375	1.565-1.625	3.43
MS9218-32	2.500	1.690-1.750	3.57
MS9218-33	2.625	1.815-1.875	3.71
MS9218-34	2.750	1.940-2.000	3.85
MS9218-35	2.875	2.065-2.125	4.00
MS9218-36	3.000	2.190-2.250	4.14
MS9218-37	3.125	2.315-2.375	4.29
MS9218-38	3.250	2.440-2.500	4.43
MS9218-39	3.375	2.565-2.625	4.58

PART NO	L	K	APPROX WEIGHT LB/100
MS9218-40	3.500	2.690-2.750	4 72
MS9218-41	3.625	2.815-2.875	4.85
MS9218-42	3.750	2.940-3.000	4.99
MS9218-43	3.875	3.065-3 125	5 13
MS9218-44	4.000	3 190-3.250	5.27
MS9218-45	4.125	3.315-3.375	5.42
MS9218-46	4 250	3.440-3.500	5 56
MS9218-47	4.375	3.565-3.625	5.71
MS9218-48	4.500	3.690-3.750	5.85
MS9218-49	4.625	3.815-3.875	6.00
MS9218-50	4.750	3.940-4.000	6.14
MS9218-51	4.875	4.065-4.125	6.29
MS9218-52	5.000	4.190-4.250	6 43
MS9218-53	5.125	4.315-4.375	6.56
MS9218-54	5.250	4.440-4.500	6.70
MS9218-55	5.375	4.565-4.625	6.84
MS9218-56	5.500	4.690-4.750	6.99
MS9218-57	5.625	4.815-4.875	7.13
MS9218-58	5.750	4.940-5.000	7.28
MS9218-59	5.875	5.065-5.125	7.42
MS9218-60	6.000	5.190-5.250	7.57

1. SHANK SHALL BE STRAIGHT WITHIN .003 FIR. PER INCH OF BOLT LENGTH
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .013 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6304.
6. HARDNESS: ROCKWELL C42-46.
7. FINISH: DIFFUSED NICKEL-CADMIUM PLATE AMS 2416. DIMENSIONS SPECIFIED ARE AFTER PLATING. CONTACT POINTS PERMISSIBLE. PD MAY BE REDUCED .0012 MAXIMUM BEFORE PLATING.
8. MANUFACTURING SPECIFICATION: AMS 7459. PARTS SUBJECT TO MAGNETIC PARTICLE INSPECTION PER AMS 2640 BEFORE PLATING.
9. SURFACE ROUGHNESS: AS 291 UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

REVISED
APPROVED 10 Dec 63

P.A.	TITLE	MILITARY STANDARD
USAF - ASD Other Cust Navy - Weps	BOLT, MACHINE - STEEL, AMS 6304, DIFFUSED NICKEL-CADMIUM PLATE, DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, .250-28 UNJF-3A	MS9218 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 672.1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This standard has been approved by the ASD (Department of the Air Force) and the Reviewers and Users USAF - ASD Navy - Weps
Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:13Z
Check the source to verify that this is the current version before use.