FED SUP CLASS
5305

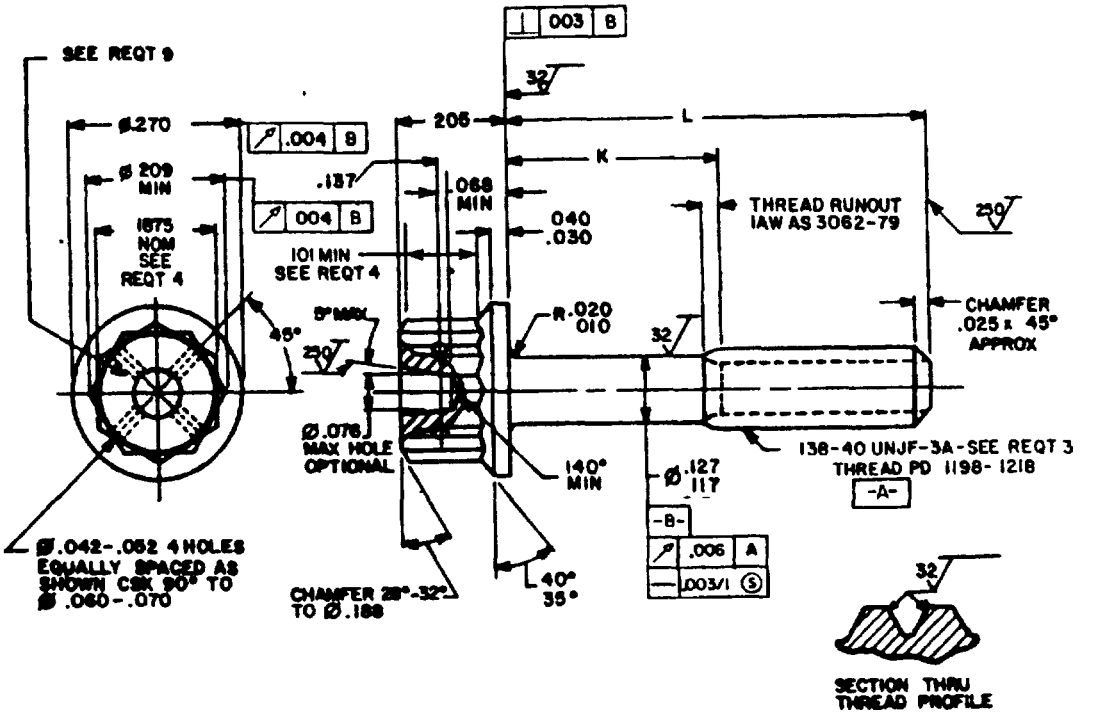


TABLE I. DASH NUMBERS AND DIMENSIONS.

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-02	.250	.058-.078	.29
-03	.312	.058-.078	.31
-04	.375	.058-.078	.33
-05	.438	.058-.078	35
-06	.500	.058-.078	37
-07	.562	.058-.078	.39
-08	.625	.058-.099	.42
-09	.688	.102-.162	44
-10	750	164-.224	.46
-11	812	.226-.286	48
-12	875	289-.349	50
-13	.938	352-.412	.52

DASH NUMBER	L	K	APPROX WEIGHT LB/100
-14	1.000	414-.474	55
-15	1.062	476-.536	.57
-16	1.125	539-.599	.59
-17	1.188	602-.662	61
-18	1.250	664-.724	.63
-19	1.312	726-.786	.65
-20	1.375	.789-.849	.66
-21	1.438	852-.912	70
-22	1.500	914-.974	72

Ⓐ ENTIRE STANDARD REVISED

P.A. NAVY AS Other Cust ARMY-AV AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE-DOUBLE HEXAGON, EXTENDED WASHER HEAD, DRILLED, SILVER PLATED, CORROSION AND HEAT RESISTANT STEEL, .138-40 UNJF-3A	MILITARY STANDARD MS9712
PROCUREMENT SPECIFICATION AMS 7471	SUPERSEDES		PAGE 1 OF 2

APPROVED 3 MAR 69 REVISED Ⓐ 24 FEB 86

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

USER ACTIVITIES

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for equipment now shall be made from this document when applicable

AMSC N/A

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5305-1596
E25-187-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:23Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5305

REQUIREMENTS:

1. MATERIAL: CORROSION AND HEAT RESISTANT STEEL IN ACCORDANCE WITH AMS 5708.
2. FINISH: SILVER PLATE IN ACCORDANCE WITH AMS 2410, .0002-.0006 THICK AT THREAD PD. DIMENSIONS SPECIFIED ARE AFTER PLATING.
3. THREADS: THREADS IN ACCORDANCE WITH MIL-S-8879. INCOMPLETE THREADS NOT TO ENTER FILLET.
4. WRENCHING CONFIGURATION: WRENCHING CONFIGURATION IN ACCORDANCE WITH AS 870.
5. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14 5M.
6. SURFACE TEXTURE: SURFACE TEXTURE, UNLESS OTHERWISE SPECIFIED, SHALL BE 125 MICROINCHES EXCEPT UPSET HEAD IN ACCORDANCE WITH ANSI B46.1.
7. FLUORESCENT PENETRANT INSPECTION: FLUORESCENT PENETRANT INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2645-03, BEFORE PLATING.
8. HEAD TO SHANK FILLET: HEAD TO SHANK FILLET SHALL BE COLD ROLLED AFTER HEAT TREATMENT TO REMOVE ALL VISUAL EVIDENCE OF GRINDING OR TOOL MARKS EXCEPT DASH NUMBER SIZES -10 AND SMALLER.
9. MARKING: MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH AS 478-79, CLASS A.
10. TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE FOR LINEAR DIMENSIONS ± 010, ANGULAR DIMENSIONS ±5°.
11. EDGES: BREAK SHARP EDGES 003-.015 UNLESS OTHERWISE SPECIFIED.
12. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I.

EXAMPLE: MS9712-04

- 04 — DASH NUMBER
- MS9712 — BASIC MS NUMBER

MS9712-04 INDICATES: SCREW, MACHINE - DOUBLE HEXAGON EXTENDED WASHER HEAD, DRILLED, SILVER PLATED .138-40 UNJF-3A, LENGTH .250

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS.
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE
4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.
6. AS AND AMS ARE SAE PUBLICATIONS

APPROVED 3 MAR 89 REVISED (A) FOR CHANGES SEE PAGE 1 AND 2

USER ACTIVITIES:

REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for replacement use shall be made from this document when applicable.

P.A. NAVY-AS Other Cust ARMY - AV AIR FORCE-99	INTERNATIONAL INTEREST	TITLE SCREW, MACHINE-DOUBLE HEXAGON, EXTENDED WASHER HEAD, DRILLED, SILVER PLATED, CORROSION AND HEAT RESISTANT STEEL, 138-40 UNJF-3A	MILITARY STANDARD MS9712
PROCUREMENT SPECIFICATION AMS 7471	SUPERSEDES:		PAGE 2 OF 2

DD FORM 1 NOV 72 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5305-1596
E25-187-3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:23Z
Check the source to verify that this is the current version before use.