
MS9799

FED. SUP CLASS 5306

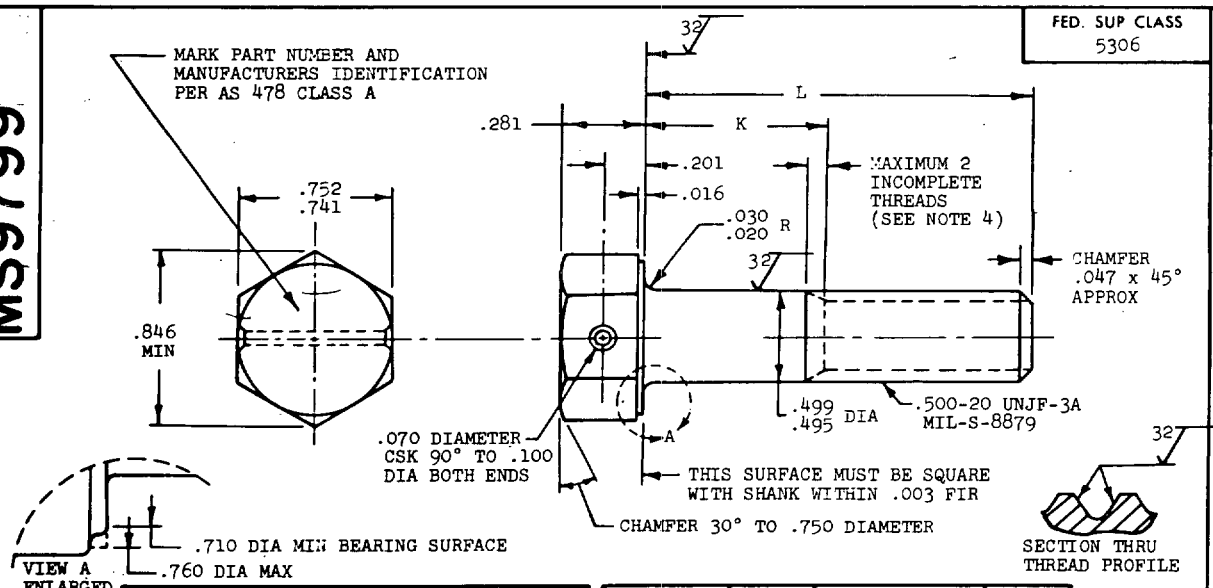

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9799-14	1.438	.128- .188	11.62
MS9799-15	1.500	.190- .250	11.95
MS9799-16	1.562	.252- .312	12.29
MS9799-17	1.625	.315- .375	12.69
MS9799-18	1.688	.378- .438	12.98
MS9799-19	1.750	.440- .500	13.32
MS9799-20	1.812	.502- .562	13.66
MS9799-21	1.875	.565- .625	14.00
MS9799-22	1.938	.628- .688	14.34
MS9799-23	2.000	.690- .750	14.68
MS9799-24	2.125	.815- .875	15.37
MS9799-25	2.250	.940-1.000	16.05
MS9799-26	2.375	1.065-1.125	16.73
MS9799-27	2.500	1.190-1.250	17.42
MS9799-28	2.625	1.315-1.375	18.10
MS9799-29	2.750	1.440-1.500	18.78
MS9799-30	2.875	1.565-1.625	19.47
MS9799-31	3.000	1.690-1.750	20.15
MS9799-32	3.125	1.815-1.875	20.84
MS9799-33	3.250	1.940-2.000	21.52
MS9799-34	3.375	2.065-2.125	22.20
MS9799-35	3.500	2.190-2.250	22.89

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9799-36	3.625	2.315-2.375	23.58
MS9799-37	3.750	2.440-2.500	24.26
MS9799-38	3.875	2.565-2.625	24.95
MS9799-39	4.000	2.690-2.750	25.63
MS9799-40	4.125	2.815-2.875	26.31
MS9799-41	4.250	2.940-3.000	27.00
MS9799-42	4.375	3.065-3.125	27.69
MS9799-43	4.500	3.190-3.250	28.37
MS9799-44	4.625	3.315-3.375	29.05
MS9799-45	4.750	3.440-3.500	29.73
MS9799-46	4.875	3.565-3.625	30.41
MS9799-47	5.000	3.690-3.750	31.10
MS9799-48	5.125	3.815-3.875	31.78
MS9799-49	5.250	3.940-4.000	32.46
MS9799-50	5.375	4.065-4.125	33.15
MS9799-51	5.500	4.190-4.250	33.83
MS9799-52	5.625	4.315-4.375	34.52
MS9799-53	5.750	4.440-4.500	35.20
MS9799-54	5.875	4.565-4.625	35.88
MS9799-55	6.000	4.690-4.750	36.57

1. SHANK SHALL BE STRAIGHT WITHIN .002 TOTAL PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .023 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: CORROSION RESISTANT STEEL AMS 5643.
6. HARDNESS: ROCKWELL C32-38.
7. MANUFACTURING SPECIFICATION: AMS 7474.
8. FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
9. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°.
12. DO NOT USE UNASSIGNED PART NUMBERS.

(B) REINSTATED 15 AUG 84

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 11 MAR 70 REVISED (A) 21 DEC 85 (B) 15 AUG 84

Review activities: (B) AIR FORCE - 82 DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A. AS	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust. (B) AV 99	(B)	BOLT, MACHINE - HEXAGON HEAD, DRILLED, 1 HOLE, FULL SHANK, AMS 5643, .500-20 UNJF-3A	MS9799
PROCUREMENT SPECIFICATION NONE		SUPERSEDES:	PAGE 1 OF 1

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0854

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:25Z
Check the source to verify that this is the current version before use.