
FED. SUP CLASS
5340

# MS9826

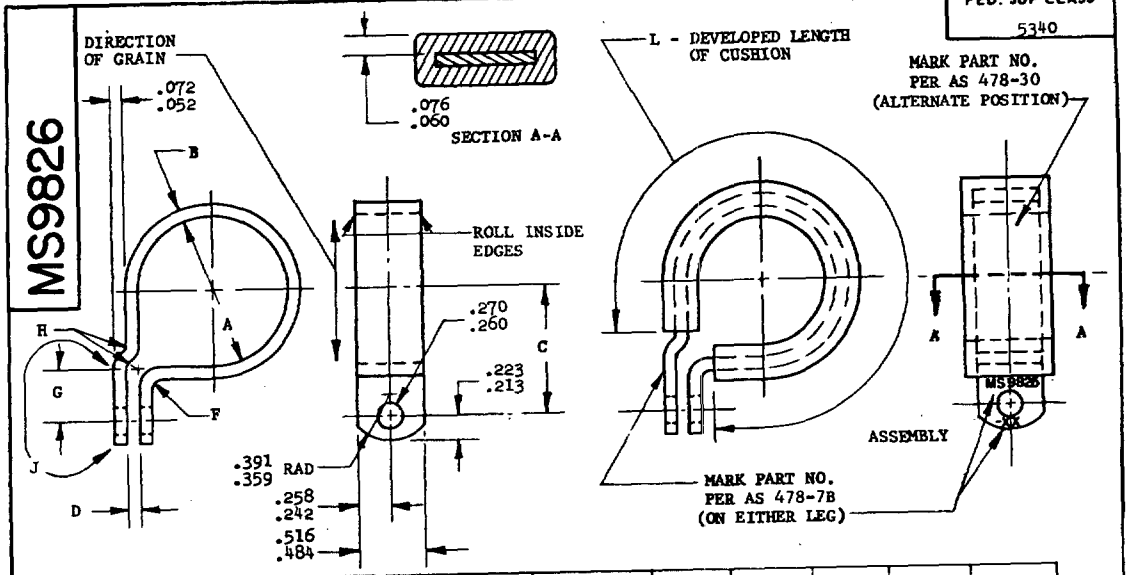


| PART NO. | NOM TUBE OD | A DIA BASIC | B ±.006 | C ±.010 | D | F RAD ±.016 | G ±.016 | H RAD ±.016 | L +.040 -.000 | APPROX WEIGHT LB/100 |
|---|---|---|---|---|---|---|---|---|---|---|
| MS9826-01 | .125 | .250 | .031 | .457 | .125-.141 | .062 | .312 | .062 | .679 | .88 |
| MS9826-02 | .188 | .312 | .031 | .498 | .125-.141 | .062 | .312 | .062 | .908 | 1.12 |
| MS9826-03 | .250 | .375 | .031 | .529 | .125-.141 | .062 | .312 | .062 | 1.097 | 1.30 |
| MS9826-04 | .312 | .438 | .031 | .560 | .125-.141 | .062 | .312 | .062 | 1.306 | 1.49 |
| MS9826-05 | .375 | .500 | .031 | .592 | .125-.141 | .062 | .312 | .062 | 1.515 | 1.67 |
| MS9826-06 | .438 | .562 | .031 | .623 | .125-.141 | .062 | .312 | .062 | 1.724 | 1.88 |
| MS9826-07 | .500 | .625 | .031 | .654 | .125-.141 | .062 | .312 | .062 | 1.930 | 2.06 |
| MS9826-08 | .562 | .688 | .051 | .752 | .125-.141 | .109 | .375 | .094 | 2.092 | 2.94 |
| MS9826-09 | .625 | .750 | .051 | .783 | .125-.141 | .109 | .375 | .094 | 2.299 | 3.18 |
| MS9826-10 | .688 | .812 | .051 | .814 | .125-.141 | .109 | .375 | .094 | 2.506 | 3.42 |
| MS9826-11 | .750 | .875 | .051 | .845 | .125-.141 | .109 | .375 | .094 | 2.721 | 3.68 |
| MS9826-12 | .812 | .938 | .051 | .877 | .125-.141 | .109 | .375 | .094 | 2.929 | 3.92 |
| MS9826-13 | .875 | 1.000 | .051 | .908 | .125-.141 | .109 | .375 | .094 | 3.136 | 4.15 |
| MS9826-14 | .938 | 1.062 | .051 | .939 | .125-.141 | .109 | .375 | .094 | 3.343 | 4.39 |
| MS9826-15 | 1.000 | 1.125 | .051 | .970 | .125-.141 | .109 | .375 | .094 | 3.555 | 4.63 |
| MS9826-16 | 1.062 | 1.188 | .051 | 1.002 | .125-.141 | .109 | .375 | .094 | 3.769 | 4.88 |
| MS9826-17 | 1.125 | 1.250 | .064 | 1.062 | .156-.172 | .125 | .406 | .125 | 3.914 | 5.93 |
| MS9826-18 | 1.188 | 1.312 | .064 | 1.093 | .156-.172 | .125 | .406 | .125 | 4.125 | 6.20 |
| MS9826-19 | 1.250 | 1.375 | .064 | 1.125 | .156-.172 | .125 | .406 | .125 | 4.339 | 6.48 |
| MS9826-20 | 1.312 | 1.438 | .064 | 1.156 | .156-.172 | .125 | .406 | .125 | 4.551 | 6.76 |
| MS9826-21 | 1.375 | 1.500 | .064 | 1.188 | .156-.172 | .125 | .406 | .125 | 4.754 | 7.03 |
| MS9826-22 | 1.438 | 1.562 | .064 | 1.219 | .156-.172 | .125 | .406 | .125 | 5.066 | 7.35 |
| MS9826-23 | 1.500 | 1.625 | .064 | 1.250 | .156-.172 | .125 | .406 | .125 | 5.173 | 7.58 |
| MS9826-24 | 1.562 | 1.688 | .064 | 1.281 | .156-.172 | .125 | .406 | .125 | 5.386 | 7.86 |
| MS9826-25 | 1.625 | 1.750 | .064 | 1.312 | .156-.188 | .125 | .406 | .125 | 5.585 | 8.12 |
| MS9826-26 | 1.688 | 1.812 | .064 | 1.344 | .156-.188 | .125 | .406 | .125 | 5.798 | 8.39 |
| MS9826-27 | 1.750 | 1.875 | .064 | 1.375 | .156-.188 | .125 | .406 | .125 | 6.011 | 8.67 |
| MS9826-28 | 1.812 | 1.938 | .064 | 1.406 | .156-.188 | .125 | .406 | .125 | 6.223 | 8.96 |
| MS9826-29 | 1.875 | 2.000 | .064 | 1.438 | .156-.188 | .125 | .406 | .125 | 6.436 | 9.24 |
| MS9826-30 | 1.938 | 2.062 | .064 | 1.469 | .156-.188 | .125 | .406 | .125 | 6.643 | 9.50 |
| MS9826-31 | 2.000 | 2.125 | .064 | 1.500 | .156-.188 | .125 | .406 | .125 | 6.840 | 9.77 |

1. CLAMP SHALL BE FORMED AS SHOWN BUT LEGS MAY SPRING OPEN IN FREE POSITION.
2. "D" DIMENSION APPLIES WHEN CLAMP IS ASSEMBLED ON A TEST BAR OF NOMINAL TUBE OD WITHIN ±.001. CLAMP MUST BE FLAT IN AREA "J" WITHIN .010 AND HOLES MUST BE IN ALIGNMENT WITHIN .010 WHEN CLAMP IS MOUNTED ON TEST BAR.
3. MATERIAL: CLAMP - STEEL, CRES AMS5510
   CUSHION - FABRIC, WIRE REINFORCED ASBESTOS, POLYTETRAFLUOROETHYLENE IMPREGNATED, SINTERED AMS3839
4. REMOVE BURRS AND SHARP EDGES.
5. DIMENSIONS IN INCHES.
6. DO NOT USE UNASSIGNED PART NUMBERS.

(A) INACTIVE FOR DESIGN AFTER 7 SEPTEMBER 1972. NO SUPERSEDING STANDARD.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION.

APPROVED 20 Dec 66 REVISED (A) 7 Sept. 72

| P.A. | TITLE | MILITARY STANDARD |
|---|---|---|
| USAF - 11<br>Other Cust<br>Navy - AS | CLAMP, LOOP-CUSHIONED, JOGGLED, CORROSION RESISTING STEEL, .265 HOLE | MS9826 |
| PROCUREMENT SPECIFICATION<br>NONE | SUPERSEDES: | SHEET 1 OF 1 |

DD FORM 1 SEP 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This standard has been approved by the Naval Air Systems Command and the Department of the USAF (11) and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

1740

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.