
MS9829

FED. SUP CLASS
5307

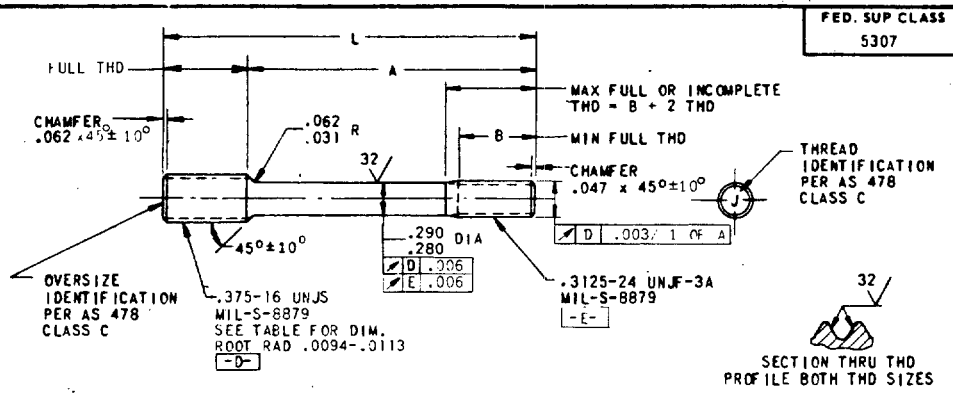

OVERSIZE IDENTIFICATION			STANDARD	+.003	+.006	+.009	+.012	STANDARD
			(0)	(3)	(6)	(9)	(12)	
MAJOR DIAMETER PD BEFORE PLATING			.370-.375	.370-.375	.370-.375	.379-.384	.379-.384	
PD AFTER PLATING			.3387-.3397	.3417-.3427	.3447-.3457	.3477-.3487	.3507-.3517	
PD LEAD THREAD			.3392-.3407	.3422-.3437	.3452-.3467	.3482-.3497	.3512-.3527	
MINOR DIA			.3324-.3344	.3354-.3374	.3384-.3404	.3414-.3434	.3444-.3464	APPROX WEIGHT
			.3038-.3091	.3068-.3121	.3098-.3151	.3128-.3181	.3158-.3211	LBS/100
L	A	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	
1.375	.625	.500	MS9829-011	MS9829-012	MS9829-013	MS9829-014	MS9829-015	3.06
1.438	.688	.562	MS9829-016	MS9829-017	MS9829-018	MS9829-019	MS9829-020	3.17
1.500	.750	.625	MS9829-021	MS9829-022	MS9829-023	MS9829-024	MS9829-025	3.29
1.562	.812	.625	MS9829-026	MS9829-027	MS9829-028	MS9829-029	MS9829-030	3.40
1.625	.875	.625	MS9829-031	MS9829-032	MS9829-033	MS9829-034	MS9829-035	3.51
1.688	.938	.688	MS9829-036	MS9829-037	MS9829-038	MS9829-039	MS9829-040	3.63
1.719	.969	.688	MS9829-041	MS9829-042	MS9829-043	MS9829-044	MS9829-045	3.68
1.750	1.000	.625	MS9829-046	MS9829-047	MS9829-048	MS9829-049	MS9829-050	3.74
1.812	1.062	.719	MS9829-051	MS9829-052	MS9829-053	MS9829-054	MS9829-055	3.85
1.875	1.125	.625	MS9829-056	MS9829-057	MS9829-058	MS9829-059	MS9829-060	3.96
1.938	1.188	.625	MS9829-061	MS9829-062	MS9829-063	MS9829-064	MS9829-065	4.08
2.000	1.250	.625	MS9829-066	MS9829-067	MS9829-068	MS9829-069	MS9829-070	4.19
2.062	1.312	.625	MS9829-071	MS9829-072	MS9829-073	MS9829-074	MS9829-075	4.30
2.125	1.375	.625	MS9829-076	MS9829-077	MS9829-078	MS9829-079	MS9829-080	4.42
2.188	1.438	.625	MS9829-081	MS9829-082	MS9829-083	MS9829-084	MS9829-085	4.53
2.250	1.500	.625	MS9829-086	MS9829-087	MS9829-088	MS9829-089	MS9829-090	4.64
2.312	1.562	.625	MS9829-091	MS9829-092	MS9829-093	MS9829-094	MS9829-095	4.76
2.375	1.625	.625	MS9829-096	MS9829-097	MS9829-098	MS9829-099	MS9829-100	4.87
2.438	1.688	.625	MS9829-101	MS9829-102	MS9829-103	MS9829-104	MS9829-105	4.98
2.500	1.750	.625	MS9829-106	MS9829-107	MS9829-108	MS9829-109	MS9829-110	5.09
2.625	1.875	.625	MS9829-111	MS9829-112	MS9829-113	MS9829-114	MS9829-115	5.32
2.750	2.000	.625	MS9829-116	MS9829-117	MS9829-118	MS9829-119	MS9829-120	5.55
2.875	2.125	.625	MS9829-121	MS9829-122	MS9829-123	MS9829-124	MS9829-125	5.77
3.000	2.250	.625	MS9829-126	MS9829-127	MS9829-128	MS9829-129	MS9829-130	6.00
3.125	2.375	.625	MS9829-131	MS9829-132	MS9829-133	MS9829-134	MS9829-135	6.22
3.250	2.500	.625	MS9829-136	MS9829-137	MS9829-138	MS9829-139	MS9829-140	6.45
3.375	2.625	.625	MS9829-141	MS9829-142	MS9829-143	MS9829-144	MS9829-145	6.68
3.500	2.750	.625	MS9829-146	MS9829-147	MS9829-148	MS9829-149	MS9829-150	6.90
3.625	2.875	.625	MS9829-151	MS9829-152	MS9829-153	MS9829-154	MS9829-155	7.13
3.750	3.000	.625	MS9829-156	MS9829-157	MS9829-158	MS9829-159	MS9829-160	7.35
3.875	3.125	.625	MS9829-161	MS9829-162	MS9829-163	MS9829-164	MS9829-165	7.58
4.000	3.250	.625	MS9829-166	MS9829-167	MS9829-168	MS9829-169	MS9829-170	7.81
4.125	3.375	.625	MS9829-171	MS9829-172	MS9829-173	MS9829-174	MS9829-175	8.03
4.250	3.500	.625	MS9829-176	MS9829-177	MS9829-178	MS9829-179	MS9829-180	8.26

1. MATERIAL: STEEL, AMS 6320, AMS 6322 OR AMS 6327
2. HARDNESS: ROCKWELL C26-32.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
4. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
5. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966.
6. MANUFACTURING SPECIFICATION: AMS 7456 EXCEPT THREAD FORM.
7. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
8. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
9. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010.
10. MARK PART NUMBER AND MANUFACTURERS IDENTIFICATION ON CONTAINER.
11. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIV.

APPROVED 27 Aug 71 REVISED

Review activities: Air Force - 82

This standard has been approved by the of the Air Force and the Department of the Navy and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. Air Force-11	TITLE	MILITARY STANDARD
Other Cust Navy-AS	STUD-STEPPED, 2 DIA ENGAGEMENT, STEEL .375-16 UNJS x .3125-24 UNJF	MS9829
PROCUREMENT SPECIFICATION AMS 7456	SUPERSEDES:	SHEET 1 OF 1

DD FORM SEP 67 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:26Z
Check the source to verify that this is the current version before use.