MIL-C-48393 (PA)
15 January 1975

MILITARY SPECIFICATION

CARTRIDGE, IGNITION, XM702E2
PARTS FOR

This Specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This Specification covers parts for XM702E2, Ignition Cartridges for 60mm mortar ammunition.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specification for

STANDARDS

MILITARY

MIL-STD-1169 - Packaging, Packing and Marking for Shipment of Inert Ammunition Components.

DRAWINGS

PICATINNY ARSENAL

PRODUCT AND PACKAGE DRAWINGS

7549175 - Plug, Firing
9280531 - Support

FSC: 1310

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

9280532 - Cap
9280533 - Tube, Flash
9280540 - Head, Primer
9280554 - Liner, Paper
9282409 - Gasket
9285301 - Tube Assembly

3. REQUIREMENTS

3.1 Materials.-Materials shall be in accordance with applicable drawings and specifications.

3.2 Parts.-The parts shall comply with all requirements specified on Drawings (dwgs) 7549175, 9280531, 9280532, 9280533, 9280540, 9280554, 9282409, and 9285301, as applicable, and with all requirements specified in applicable specifications.

3.3 First article inspection.-This specification makes provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.4 Bursting strength.-The tube assemblies, excluding tape, shall not burst at a compression load of 57 pounds, minimum, but shall burst at a compression load of 192 pounds, maximum. Testing shall be as specified in 4.4.3.1.

3.5 Workmanship.-All parts shall be fabricated and finished in a thorough workmanlike manner. They shall be free of burrs, sharp edges, cracks, dirt, rust and other foreign matter. The cleaning method used shall not be injurious to any part nor shall the parts be contaminated by the cleaning agent. All required markings shall be neat and sharply defined.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions.-Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections.-The following types of inspection shall be conducted on this item:

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:56Z
Check the source to verify that this is the current version before use.

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection

4.3.1 Submission.-The contractor shall submit a first article sample as designated by the contracting officer for evaluation in accordance with provisions of 4.3.2. The first article sample shall consist of twenty-five (25) complete sets of parts.

4.3.2 Inspections to be performed.-The first article parts submitted in accordance with paragraph 4.3.1 will be subjected by the Government to any or all the requirements of the applicable drawings and to the inspections and tests listed in paragraph 4.4.2 through 4.4.3.

4.3.3 Rejection.-See MIL-A-48078 (PA).

4.4 Quality conformance inspection

4.4.1 Inspection lot formation.-Inspection lots shall comply with lot formation provisions of MIL-A-48078.

4.4.2 Examination.-See MIL-A-48078.

a. Sampling plans. Unless otherwise specified in the Classification of Defects and Test Tables, samplings plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

Source: https://assist.dla.mil -- Downloaded: 202610-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9285299
4.4.2.1	Tube, Outer				NEXT HIGHER ASSEMBLY 9285465
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major A					
101.	Thickness		0.40%	3.2	Gage
102.	Tube not spiral wound	5		3.2	Visual
Major B					
131.	Length		0.40%	3.2	Gage
132.	Diameter		0.40%	3.2	Gage
Minor	None defined				

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.2	Support		9280531
			NEXT HIGHER ASSEMBLY
			9285465

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major A					
101.	Pitch diameter of thread, min		0.40%	3.2	Gage
102.	Major diameter of thread, min		0.40%	3.2	Gage
103.	Diameter of counterbore		0.40%	3.2	Gage
104.	Depth of counterbore		0.40%	3.2	Gage
105.	Total length		0.40%	3.2	Gage
106.	Length of undercut, max		0.40%	3.2	Gage
107.	True position of counterbore		0.40%	3.2	Gage
Major B					
131.	Diameter of firing plug hole		0.40%	3.2	Gage
Minor					
201.	Pitch diameter of thread, max		0.65%	3.2	Gage
202.	Major diameter of thread, max		0.65%	3.2	Gage
203.	Depth of counterbore, max		0.65%	3.2	Gage
204.	Length of undercut, min		0.65%	3.2	Gage
205.	Diameter of external thread undercut		0.65%	3.2	Gage
206.	Diameter of spanner holes		0.65%	3.2	Gage
207.	True position of spanner holes		0.65%	3.2	Gage
208.	Depth of spanner holes		0.65%	3.2	Gage
209.	Surface finish improper		0.65%	3.2	Visual
210.	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.3	Cap		9280532
			NEXT HIGHER ASSEMBLY
			9285465

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major A					
101.	Outside diameter		0.40%	3.2	Gage
102.	Total length		0.40%	3.2	Gage
103.	Diameter of cavity		0.40%	3.2	Gage
104.	Depth of cavity		0.40%	3.2	Gage
Major B					
131.	Depth of groove		0.40%	3.2	Gage
132.	Width of groove		0.40%	3.2	Gage
Minor					
201.	Length of groove		0.65%	3.2	Gage
202.	Radii or chamfers missing		0.65%	3.2	Visual
203.	Surface finish improper		0.65%	3.2	Visual
204.	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9280533
4.4.2.4	Tube, Flash				NEXT HIGHER ASSEMBLY 9285465
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1.	Longitudinal flash hole missing or obstructed		100%	3.2	Gage
2.	Flash hole(s) missing or excessive in number		100%	3.2	Gage
Major A					
101.	Diameter of longidtudinal flash hole		0.40%	3.2	Gage
102.	Diameter of flash holes		0.40%	3.2	Gage
103.	Outside diameter		0.40%	3.2	Gage
104.	Diameter of pellet cavity		0.40%	3.2	Gage
105.	Runout of pellet cavity		0.40%	3.2	Gage
106.	Depth of pellet cavity		0.40%	3.2	Gage
107.	Length		0.40%	3.2	Gage
108.	True position of pellet cavity		0.40%	3.2	Gage
109.	Angular location of flash holes		0.40%	3.2	Gage
Major B	None defined				
Minor					
201.	Chamfers missing		0.65%	3.2	Visual
202.	Surface finish improper		0.65%	3.2	Visual
203.	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 3		DRAWING NUMBER 9280540
4.4.2.5	Head, Primer				NEXT HIGHER ASSEMBLY 9285465
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major A					
101.	Pitch diameter of internal threads, max		0.40%	3.2	Gage
102.	Minor diameter of internal threads, max		0.40%	3.2	Gage
103.	Pitch diameter of external theads, min		0.40%	3.2	Gage
104.	Major diameter of external threads, min		0.40%	3.2	Gage
105.	Diameter of primer cavity		0.40%	3.2	Gage
106.	Depth of primer cavity		0.40%	3.2	Gage
107.	Depth of flash tube cavity		0.40%	3.2	Gage
108.	Diameter of flash tube cavity		0.40%	3.2	Gage
109.	Diameter of flash hole		0.40%	3.2	Gage
110.	Length of internal thread, min		0.40%	3.2	Gage
111.	Length from large diameter to tube shoulder		0.40%	3.2	Gage
112.	Depth of support cavity		0.40%	3.2	Gage
113.	True position of primer cavity		0.40%	3.2	Gage
114.	True position of flash tube cavity		0.40%	3.2	Gage
115.	True position of flash hole		0.40%	3.2	Gage
116.	True position of internal thread		0.40%	3.2	Gage
117.	Perpendicularity of support face		0.40%	3.2	Gage
Major B					
131.	Diameter of countersink at base of primer cavity, max.		0.40%	3.2	Gage

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE	SHEET 2 OF 3	DRAWING NUMBER
4.4.2.5	Head, Primer		9280540
			NEXT HIGHER ASSEMBLY 9285465

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Major B					
132.	Diameter of thread undercut (two places)		0.40%	3.2	Gage
133.	Length from large diameter to end of head		0.40%	3.2	Gage
134.	Tube bearing diameter		0.40%	3.2	Gage
135.	Width of crimp grooves		0.40%	3.2	Gage
136.	Depth of crimp grooves		0.40%	3.2	Gage
Minor					
201.	Pitch diameter of internal thread, min		0.65%	3.2	Gage
202.	Pitch diameter of external thread, max		0.65%	3.2	Gage
203.	Major diameter of external thread, max		0.65%	3.2	Gage
204.	Diameter of large end		0.65%	3.2	Gage
205.	Diameter of internal thread relief, max		0.65%	3.2	Gage
206.	Length of large diameter		0.65%	3.2	Gage
207.	Length from large diameter to external thread		0.65%	3.2	Gage
208.	Length from large diameter to beyond external thread		0.65%	3.2	Gage
209.	Length from tube shoulder to first crimp groove		0.65%	3.2	Gage
210.	Length between crimp grooves		0.65%	3.2	Gage
211.	Radii, chamfers or countersinks missing		0.65%	3.2	Visual
212.	Surface finish improper		0.65%	3.2	Visual
213.	Evidence of poor workmanship		0.65%	3.5	Visual
214.	Depth of slots		0.65%	3.2	Gage

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE		SHEET 3 OF 3		DRAWING NUMBER
4.4.2.5	Head, Primer				9280540
					NEXT HIGHER ASSEMBLY 9285465
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
215.	Width of slots		0.65%	3.2	Gage
216.	True position of slots		0.65%	3.2	Gage

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.6	Plug, Firing		7549175
			NEXT HIGHER ASSEMBLY 9285465

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major A					
101.	Large diameter		0.40%	3.2	Gage
102.	Small diameter		0.40%	3.2	Gage
103.	Length of tip		0.40%	3.2	Gage
104.	Total length including tip		0.40%	3.2	Gage
105.	Length from tip to small diameter		0.40%	3.2	Gage
106.	Radius improper		0.40%	3.2	Gage
Major B	None defined				
Minor					
201.	Evidence of poor workmanship		0.65%	3.5	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.7	Liner		9280554
			NEXT HIGHER ASSEMBLY 9285465

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major A					
101.	Thickness		0.40%	3.2	Gage
102.	Tube not spiral wound	5	--	3.2	Visual
Major B					
131.	Length		0.40%	3.2	Gage
132.	Diameter		0.40%	3.2	Gage
Minor	None defined				

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.8	Gasket		9282409
			NEXT HIGHER ASSEMBLY 9285465

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major A					
101.	Thickness		0.40%	3.2	Gage
102.	Outside diameter		0.40%	3.2	Gage
103.	Inside diameter		0.40%	3.2	Gage
104.	Concentricity		0.40%	3.2	Gage
Major B	None defined				
Minor	None defined				

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-48393 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.9	Packed Carton prior to sealing				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major A	None defined				
Major B	None defined				
Minor					
201.	Support(s) missing or damaged		0.65%	5.1	Visual
202.	Divider(s) missing or damaged		0.65%	5.1	Visual
203.	Improperly packed		0.65%	5.1	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-C-48393 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.10	Carton after sealing				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major A	None defined				
Major B	None defined				
Minor					
201.	Contents loose		0.65%	5.1	Manual
202.	Cartons damaged (cut or damaged through all layers)		0.65%	5.1	Visual
203.	Carton not properly sealed		0.65%	5.1	Visual
204.	Marking, missing, incorrect or illegible		0.65%	5.1	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Bursting strength (see 3.4) Major A defect

4.4.3.1.1 Beginning with the first lot produced and continuing until three consecutive lots have complied with the applicable requirements specified, the sampling plan and procedure for this test shall be in accordance with MIL-STD-105 Code Letter J and AQL of 0.65 percent. The test shall be performed as specified in 4.5.1.

4.4.3.1.2 After three consecutive lots have met the criteria of 4.3.3.1.1, the sampling plan for this test shall be in accordance with MIL-STD-105 Code Letter F, using an AQL of 0.65 percent. The test shall be performed as specified in 4.5.1.

4.4.4 Inspection equipment.-The inspection equipment required to perform the examinations and tests prescribed herein is described in the 'Paragraph Reference/Inspection Method' column in the tables starting with 4.4.2.1 and 4.5 (see 6.2).

4.5 Test methods and procedures

4.5.1 Bursting strength.-The tube and liner (without tape) shall be cut in half lengthwise and one of the combined halves placed in a fixture as indicated in Figure 1. Set Stop (5) on fixture so that Punch (2) is at center line and at a point one inch from the end of the combined halves. Lock Stop with set screw. The fixture shall be placed in a universal testing machine which will apply the required load at a rate of ram travel of 0.100 to 0.125 inches per minute inclusive.


TEST NUMBER 1: NO BURST

Apply 57 pounds compression load. Remove body assembly. Item is rejected if evidence of bursting is observed. Tearing or puncturing of material shall be considered evidence of bursting.

TEST NUMBER 2: BURSTING

If item is not rejected, replace it in fixture, using opposite end of body and apply 192 pounds compression load. If item shows no evidence of bursting it shall be rejected.


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

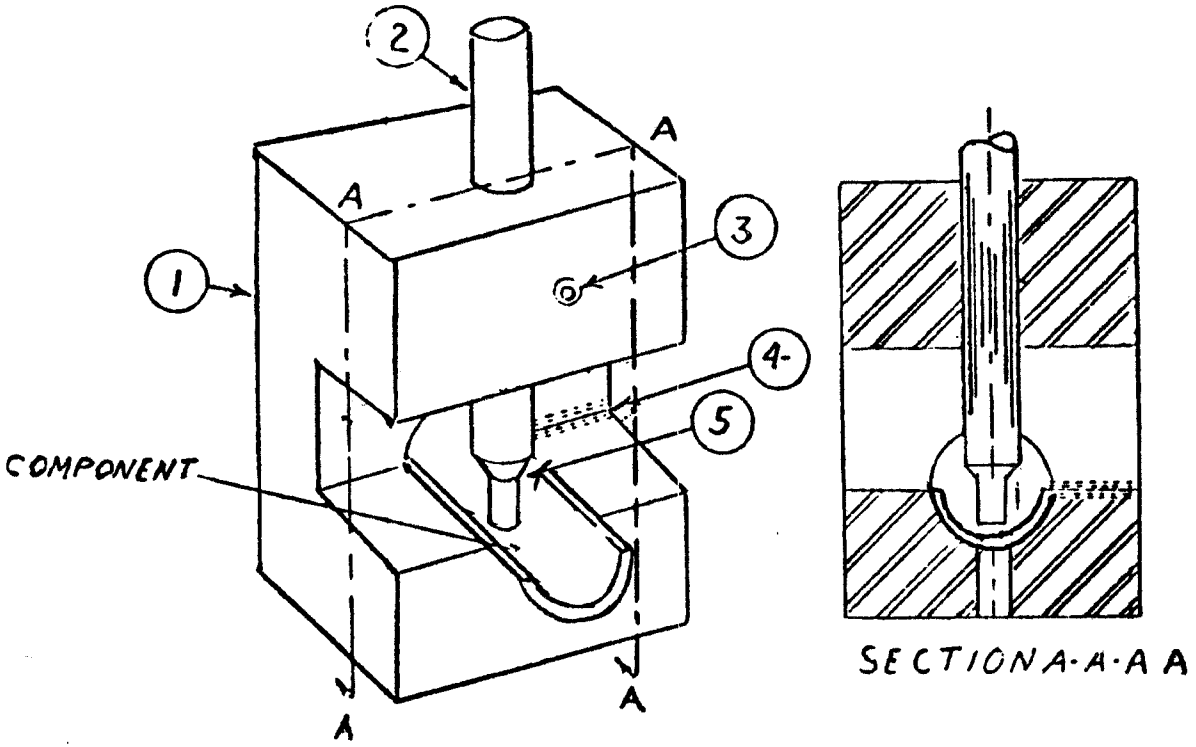

ASSEMBLY
BURSTING STRENGTH
TEST FIXTURE

FIGURE 1 SHEET 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

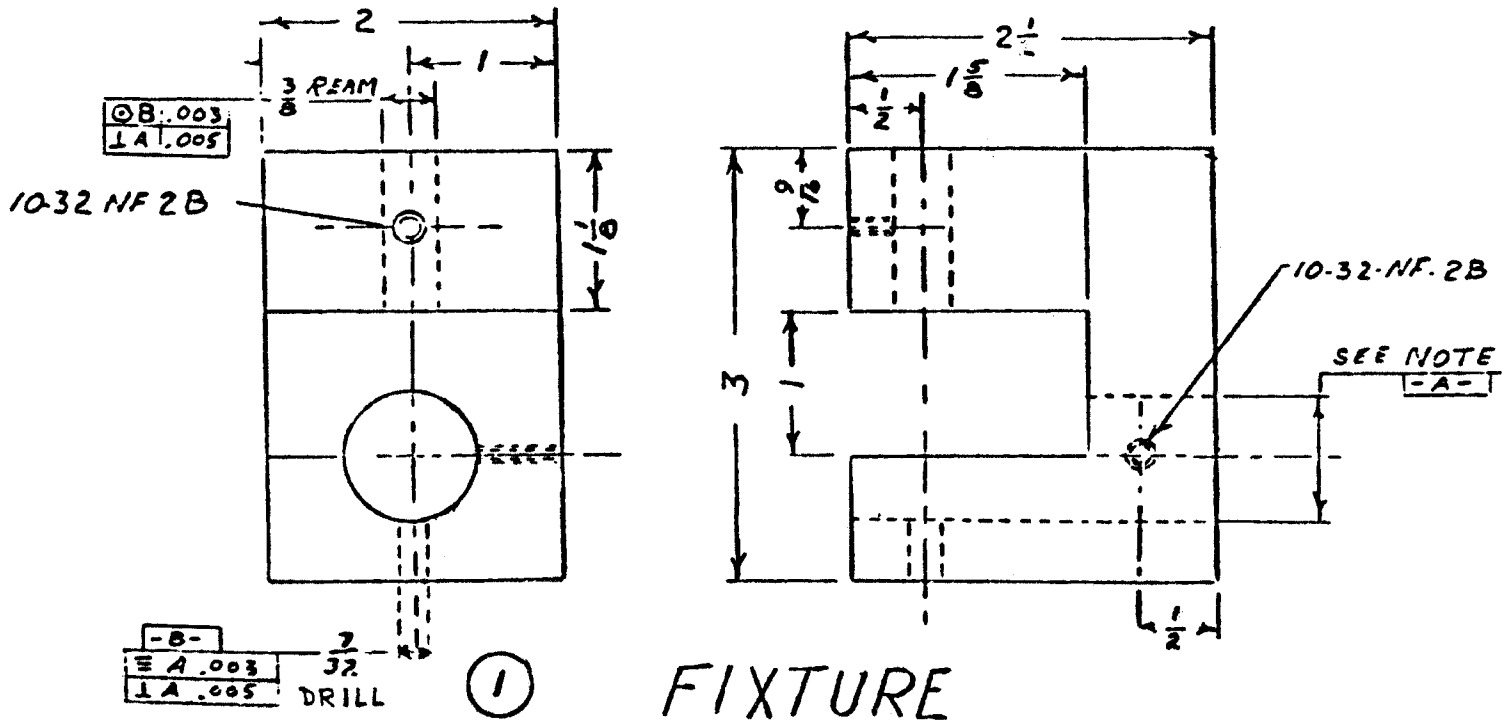

(1) FIXTURE

MAT'L - MACH. STEEL 1 REQ'D

(3) 10-32 SOC. SETSCREW FULL DOG PT. 3/8 LG.

(4) 10-32 NF-2A SOC. SETSCREW FULL DOG PT. 1/2 LG

NOTE: DIAMETER TO SUIT APPLICABLE BODY ASS'Y


FIGURE 1 SHEET 2

DIMENSIONS ARE IN INCHES

TOLERANCES ON - DECIMALS ± .01
FRACTIONS ± 1/64
ANGLES ± 2°


MIL-C- 48393 (PA)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

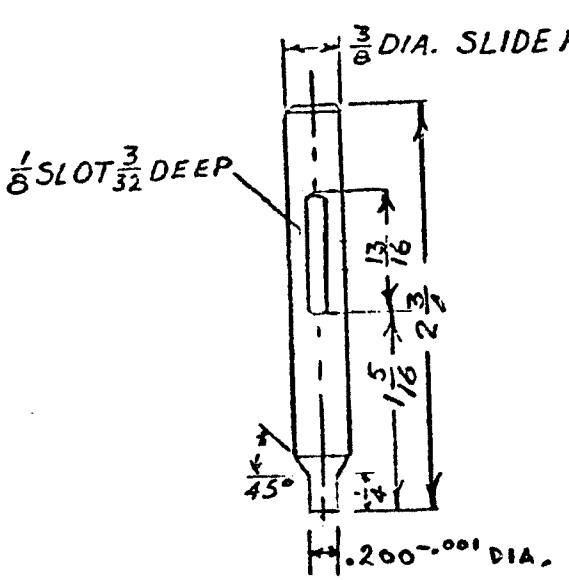

(2) PUNCH

MATERIAL, DRILL ROD
1 REQ'D.

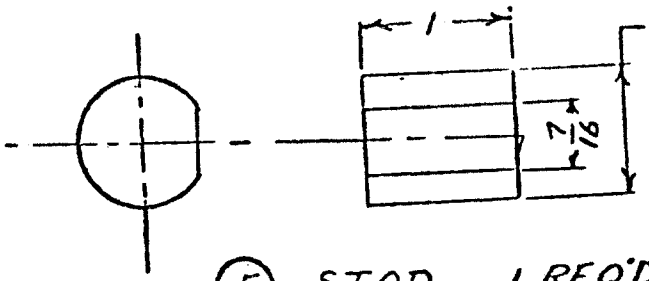

(5) STOP 1 REQ'D

MAT'L - MACH. STEEL

FIGURE 1 SHEET 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.-Packaging, packing and marking shall be in accordance with the requirements of Level C in MIL-STD-1169.

6. NOTES

6.1 Ordering data.-See MIL-A-48078 (PA).

a. Ammunition data cards shall be prepared in accordance with MIL-STD-1167.

6.2 Submission of designs for approval.-See 6.2.3 of MIL-A-48078. Submit equipment designs, as required, to Commander, Picatinny Arsenal, ATTN: SARPA-QA-T-T, Dover, New Jersey 07801.

Custodian:
ARMY-PA

Preparing Activity:
ARMY-PA

Project Number: 1310-A065

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:56Z
Check the source to verify that this is the current version before use.