MIL-D-48345 (PA)
2 DECEMBER 1976

DISPENSER, BOMB: SUU-13-D/A

This specification is approved for use by Picatinny Arsenal, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. - This specification covers the metal parts and assembly for one type of Dispenser, Bomb: SUU-13-D/A.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. - The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-I-6868 - Inspection Process, Magnetic Particle
MIL-A-48078 - Ammunition, Standard Quality Assurance Provisions, General Specifications For
MIL-I-48279 - Intervalometer Adapter for M56 Aircraft Subsystem
MIL-P-48850 - Pin and Lanyard Assembly

STANDARDS

FEDERAL

FED-STD-151 - Metals, Test Methods

FSC: 1345

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Picatinny Arsenal, Dover, NJ 07801 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes (ABC-STD-105)
MIL-STD-810 - Environmental Test Methods

DRAWINGS

U.S. ARMY PICATINNY ARSENAL

PRODUCT AND PACKING DRAWINGS

9256640 - Packing and Marking for Dispenser & Bomb: CBU-7A/A, SUU-13A/A, CBU-7A(T-1)/A, SUU-13A/A or M56
9287746 - Dispenser, Bomb: SUU-13-D/A

INSPECTION EQUIPMENT DRAWINGS

9202443 - Connector Mating & Presense of Fixed Resistor Test Fixture
9202444 - Operating Instructions for Connector Mating & Presence of Fixed Resistor Test Fixture
9202445 - Intervalometer Test Fixture
9202446 - Operating Instructions for Intervalometer Test Fixture
9202447 - Bomb Dispenser Harness Test Fixture
9202448 - Operating Instructions for Harness Test Fixture
9209981 - Test Set, Electrical Circuit, Bomb Dispenser; A/E 24 T-79

(Copies of specifications, standards, and drawings, required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

3. REQUIREMENTS

3.1 Material. - Materials shall be in accordance with the applicable drawings and specifications.

3.2 Parts. - The parts shall comply with all requirements specified on Drawing (Dwg.) 9287746 and with all requirements specified in applicable specifications.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

S/S

3.3 Circuit resistance.

3.3.1 Intervalometer. - The maximum resistance of each firing circuit shall be 5.75 ohms. (See 4.4.3.6)

3.3.2 Harness assembly installed. - The resistance of each circuit shall not exceed 0.55 ohms. (See 4.4.3.7)

3.4 Dispenser electrical after connector mating. - The circuit resistance between pin C and pin D of the Radhaz Filter connector shall be 4.5 to 7.0 ohms. (See 4.4.3.8)

3.5 Intervalometer assembly. - There shall be no movement of the orientation drum on the rotary stepping switch shaft, or the intervalometer assembly, after the set screw has been inserted.

3.6 Intervalometer adapter. - Inspection and testing of this item is covered in MIL-I-48279.

3.7 Wiring and soldering. - Soldering of electrical wires, cables, connectors, components and assemblies shall be performed in a thorough, workmanlike manner. There shall be no damage to wire or insulation, no burns, tears, fraying, cuts or pinch marks. Wires shall have sufficient slack in dressing to prevent breakage or strain on parts. There shall be no interference with movement of parts, no evidence of dirt, loose solder or other foreign material on wires. There shall be no broken wires or fractures, no splicing of wires, and no evidence of corrosion or excess flux. Joints shall be small, neat and intact with no breaks, cracks, looseness, cold solder or resin joints.

3.8 Pin and lanyard assembly. - Inspection and testing of this item is covered in MIL-P-48850.

3.9 Helicopter vibrations, cargo security. - The cylinder assembly, loaded with live M198 ejection charges and inert mines, shall not disengage from the dispenser when subjected to MIL-STD-810, Method 514.2, Procedure IIC (See 4.5.15).

3.10 Static firing. - The dispenser shall function as intended (See 4.5.16).

3.11 First article testing. - This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

95

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

3.12 Workmanship. - All parts and assemblies shall be fabricated and finished in a thorough workmanlike manner, and all manufacturing, processing, and assembly operations shall be correctly performed. They shall be clean and free of burrs, sharp edges, unblended radii, surface defects, chips, dirt, grease and oil (except where specifically required), corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part or assembly nor shall they be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material. All required markings and stampings shall be neat and sharply defined. (Required packing shall be dry).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection and standard quality assurance provisions. - Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. - The following types of inspection shall be conducted on this item.

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First Article Inspection.

4.3.1 Submission. - The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2 and 4.3.3. The first article sample shall consist of the following items in sample quantities as indicated in Table I.

4.3.2 Inspections to be performed. - See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. - See MIL-A-48078.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345(PA)

PARAGRAPH	TITLE		SHEET 1 OF 8		DRAWING NUMBER
	Bomb Dispenser, SUU-13-D/A and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Lug, Suspension, Bomb				
	(Dwg. MS3314)				
	Examination for Defects	24	100%	3.2	4.4.2.1
	Magnetic particle test**	24	100%	3.2	4.5.5
	Salt spray test	4	100%	3.2	4.5.1
	Hardness test	20	100%	3.2	4.5.2
	Pull test*	10	100%	3.2	4.5.3
	Impact test*	5	100%	3.2	4.5.4
	Deflection test*	5	100%	3.2	4.5.14
	Beam, Tube Support				
	(Dwg. 716562)				
	Examination for defects	4	100%	3.2	4.4.2.2
	Salt spray test	4	100%	3.2	4.5.1
	Strongback				
	(Dwg. 716558)				
	Examination for defects	4	100%	3.2	4.4.2.3
	Salt spray test	4	100%	3.2	4.5.1

NOTES: **To be performed prior to salt spray and hardness test.
* To be performed after successful completion of hardness test.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 2 OF 8	DRAWING NUMBER
	Bomb Dispenser, SUU-13-D/A and Components		SEE BELOW
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Body Assembly				
	(Dwg. 716547)				
	Examination for defects	3	100%	3.2	4.4.2.4
	Spring, Locking				
	(Dwg. 716566)				
	Examination for defects	10	100%	3.2	4.4.2.5
	Salt spray test	4	100%	3.2	4.5.1
	Hardness test	10	100%	3.2	4.5.2
	Cam, Cylinder Attaching				
	(Dwg. 716564)				
	Examination for defects	10	100%	3.2	4.4.2.6
	Salt spray test	4	100%	3.2	4.5.1
	Body and Strongback Assembly				
	Dwg. 716546				
	Examination for defects	3	100%	3.2	4.4.2.7

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345(PA)

PARAGRAPH	TITLE			SHEET 3 OF 8	DRAWING NUMBER
	Bomb Dispenser, SUU-13-D/A, and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Plate, Receptacle Mounting				
	(Dwg. 716590)				
	Examination for Defects	4	100%	3.2	4.4.2.8
	Salt spray test	4	100%	3.2	4.5.1
	Adapter, Shield				
	(Dwg. 716580)				
	Examination for defects	4	100%	3.2	4.4.2.9
	Dispenser, Bomb, SUU-13-D/A, prior to assembling top skin				
	(Dwg. 9287746)				
	Examination for defects	2	100%	3.2	4.4.2.10
	Dispenser, Bomb, SUU-13-D/A				
	(Dwg. 9287746)				
	Examination for defects	2	100%	3.2	4.4.2.11
	Dispenser electrical test	2	100%	3.2	4.5.7 & 4.5.8
	Static firing test	2	100%	3.2	4.5.16

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION
CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE		SHEET		DRAWING NUMBER
	Bomb Dispenser, SUU-13-D/A, and Components		4 OF 8		SEE BELOW
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Ballast weight (Dwg. 716605) Examination for defects	4	100%	3.2	4.4.2.12
	Printed wiring assembly intervalometer (Dwg. 9203534) Examination for defects	4	100%	3.2	4.4.2.13
	Intervalometer assembly, prior to potting and before assembling cover (Dwg. 9203528) Examination for defects	4	100%	3.2	4.4.2.14
	Intervalometer assembly, prior to assembling cover (Dwg. 9203528) Examination for defects	4	100%	3.2	4.4.2.15

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345(PA)

PARAGRAPH	TITLE		SHEET 5 OF 8		DRAWING NUMBER
	Bomb Dispenser, SUU-13-D/A, and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Intervalometer Assembly				
	(Dwg. 9203528)				
	Examination for defects	4	100%	3.2	4.4.2.16
	Salt spray test, cover and housing	4	100%	3.2	4.5.1
	Intervalometer electrical	2	100%	3.2	4.5.6
	Pallet Assembly				
	(Dwg. 9288629)				
	Examination for defects	2	100%	3.2	4.4.2.17
	Skin, Pallet				
	(Dwg. 9288723)				
	Examination for defects	2	100%	3.2	4.4.2.19
	Stiffener, Pallet Skin				
	(Dwg. 716262)				
	Examination for defects	2	100%	3.2	4.4.2.20

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS MIL-D-48345(PA)

PARAGRAPH	TITLE		SHEET 6 OF 8		DRAWING NUMBER
	Bomb Dispenser, SUU-13-D/A, and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Retaining Block and Lanyard Assembly (Dwg. 9298872)				
	Examination for defects	4	100%	3.2	4.4.2.23
	Pull test	4	100%	3.2	4.5.11
	Lock Pin and Lanyard Assembly (Dwg. 9298873)				
	Examination for defects	4	100%	3.2	4.4.2.24
	Pull test	4	100%	3.2	4.5.12
	Shipping and Storage Container, prior to assembly cover (Dwg. 9256640)				
	Examination for defects	2	100%	3.2	4.4.2.26
	Shipping and Storage Container (Dwg. 9256640)				
	Examination for defects	2	100%	3.2	4.4.2.27
	Pressure test of shipping container	2	100%	3.2	4.5.13

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345(PA)

PARAGRAPH	TITLE		SHEET 7 OF 8		DRAWING NUMBER
	Bomb Dispenser, SUU 13-D/A, and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Bulkhead, Center (Dwg. 716559) Salt spray test	4	100%	3.2	4.5.1
	Bulkhead (Dwg. 716563) Salt spray test	4	100%	3.2	4.5.1
	Longeron, Bottom (Dwg. 716560) Salt spray test (Coupons are acceptable)	4	100%	3.2	4.5.1
	Skin, Side (Dwg. 716561) (Coupons are acceptable) Salt spray test	4	100%	3.2	4.5.1
	Skin, Top (Dwg. 716687) (Coupons are acceptable) Salt spray test	4	100%	3.2	4.5.1
	Stiffener, Side Skin (Dwg. 716572) Salt spray test	4	100%	3.2	4.5.1

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

TABLE I - FIRST ARTICLE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-B-48345(PA)

PARAGRAPH	TITLE		SHEET 8 OF 8		DRAWING NUMBER
	Bomb Dispenser, SUU-13-DA, and Components				See Below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Pad, Sway Brace				
	(Dwg. 716585) Salt spray test	4	100%	3.2	4.5.1
	Fairing, Aft				
	(Dwg. 716551) Salt spray test (Coupons are acceptable)	4	100%	3.2	4.5.1
	Fairing, Forward				
	(Dwg. 716688) (Coupons are acceptable) Salt spray test	4	100%	3.2	4.5.1
	Extractor, Pallet Support Pin				
	(Dwg. 716270) Examination for defects	4	100%	3.2	4.4.2.21

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. - Inspection lots shall comply with the lot formation provisons of MIL-A-48078.

4.4.2 Examination. - (See MIL-A-48078). Unless otherwise specified in the classification of defects and test tables, sampling plans for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II. Equipment necessary for the performance of the inspections listed shall be in accordance with 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345(PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.1	Lug, suspension, bomb	1 OF 1	MS 3314
			NEXT HIGHER ASSEMBLY 9287746

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Pitch diameter of thread		0.40%	3.2	Gage
102	Major diameter of thread		0.40%	3.2	Gage
103	Total height		0.40%	3.2	Gage
104	Length of full thread, min.		0.40%	3.2	Gage
105	Location of hole		0.40%	3.2	Gage
106	Height of hole		0.40%	3.2	Gage
107	Width of hole		0.40%	3.2	Gage
108	Radii missing on inside of hole		0.40%	3.2	Visual
109	Total width		0.40%	3.2	Gage
110	Depth of top web		0.40%	3.2	Gage
Minor					
201	Width of top web		0.65%	3.2	Gage
202	Angle sides of web		0.65%	3.2	Gage
203	Marking, missing, improper or unidentifiable		0.65%	3.2	Visual
204	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2022-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.2	Beam, tube support		716562
			NEXT HIGHER ASSEMBLY
			9287746

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Diameter of cylinder mounting holes undersize		0.40%	3.2	Gage
102	Width between center longerons, oversize		0.40%	3.2	Gage
103	Location of Ballast Weight Holes		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.3	Strongback		716558
			NEXT HIGHER ASSEMBLY 9287746

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of suspension lug mounting holes		0.40%	3.2	Gage
102	Pitch diameter of suspension lug mounting holes		0.40%	3.2	Gage
103	Minor diameter of suspension lug mounting holes		0.40%	3.2	Gage
104	Minimum effective thread of suspension lug mounting holes		0.40%	3.2	Gage
105	Depth of holes, suspension lug		0.40%	3.2	Gage
106	Outside width of attachment channels, undersize		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-01-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.4	Body assembly		716547
			NEXT HIGHER ASSEMBLY 9287746

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Location of rear bulkhead		0.40%	3.2	Gage
102	Location of forward bulkhead		0.40%	3.2	Gage
103	Location of center bulkhead		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.5	Spring, Locking				716566
					NEXT HIGHER ASSEMBLY
					9287746
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Hole improperly located		0.40%	3.2	Gage
102	Angles improper		0.40%	3.2	Gage
103	Hardness (prior to plating)		0.40%	3.2	Test
Minor					
201	Poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.6	Cam, cylinder attaching	1 OF 1	716564
			NEXT HIGHER ASSEMBLY
			9287746

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Improper inside diameter		0.40%	3.2	Gage
102	Improper location of slots		0.40%	3.2	Gage
103	Improper location of mounting holes		0.40%	3.2	Gage
104	Concentricity of outside diameter with inside diameter		0.40%	3.2	Gage
105	Improper thickness		0.40%	3.2	Gage
106	Improper location, size and rise of cam surfaces		0.40%	3.2	Gage
107	Outside diameter, min.		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: http://assist.dla.mil -- Downloaded: 2024-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.7	Body and strongback assembly		716558
			NEXT HIGHER ASSEMBLY 9287746

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Fasteners of beam and strongback missing or loose		0.40%	3.2	Visual/Gage
102	Any component damaged or missing		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: http://assist.dla.mil Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.8	Plate, Receptacle Mounting	1 OF 1	716590
			NEXT HIGHER ASSEMBLY 9287746

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Improper location of plate mounting slots (4 places)		0.40%	3.2	Gage
102	Improper location of filter hole		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4B10

Source: https://assist.dla.mil Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.9	Adapter, Shield	1 OF 1	716580
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Largest inside radius missing		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.10	Dispenser, Bomb SUU-13-D/A, prior to assembling top skin	1 OF 1	9287746
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1.	Threaded end of ballast weight bolts below top surface of spine nuts		1.00%	3.2	Visual
Major					
101	Sealant missing from around suspension lug holes		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.11	Dispenser, Bomb SUU-13-D/A	1 OF 1	9287746
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Intervalometer safety pin missing		100%	3.2	Visual
2	Ballast weight missing		100%	3.2	Visual
Major					
101	Flag warning assembly missing		0.40%	3.2	Visual
102	Suspension lug missing		0.40%	3.2	Visual
103	Sway brace pads missing or improperly located		0.40%	3.2	Visual-Gage
104	Torque of ballast weight bolts below min.		0.40%	3.2	Visual-Gage
Minor					
201	Any rivet or screw missing		0.65%	3.2	Visual
202	Any component missing or damaged		0.65%	3.2	Visual
203	Marking missing or illegible		0.65%	3.2	Visual
204	Cam locks on rear fairing not secure		0.65%	3.2	Visual-Manual
205	Shipping plug missing		0.65%	3.2	Visual
206	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.12	Ballast weight	1 OF 1	716605
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Height		0.40%	3.2	Gage
102	Width		0.40%	3.2	Gage
103	Location of bolt holes		0.40%	3.2	Gage
104	Weight improper		0.40%	3.2	Scale
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4B10

Source: https://assist.dla.mil Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.13	Printed wiring assembly intervalometer	1 OF 1	9203534
			NEXT HIGHER ASSEMBLY 9203528

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Incorrect mounting of components		0.40%	3.2	Visual
102	Wiring incorrect		0.40%	3.2	Visual
103	Wiring improper (See 3.7)		0.40%	3.2	Visual
104	Any component missing or damaged		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET	OF	DRAWING NUMBER
4.4.2.14	Intervalometer assembly, prior to potting and before assembling cover	1	1	9203528
				NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Wiring incorrect		0.40%	3.2	Visual
102	Wiring improper (See 3.7)		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.15	Intervalometer assembly, (prior to assembling cover)	1 OF 1	9203528
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Potting missing or improperly applied		0.40%	3.2	Visual
102	Any component, including intervalometer adapter, missing or damaged		0.40%	3.2&3.6	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4B10

Source: https://assist.dla.mil - Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER 9203528
4.4.2.16	Intervalometer assembly				NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical					
1	Movement of the orientation drum on the rotary stepping switch shaft (See 3.5)		100%	3.2	Manual-Visual
Major					
101	Any component missing or damaged		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 2	DRAWING NUMBER
4.4.2.17	Pallet Assembly		9288629
			NEXT HIGHER ASSEMBLY 9287746

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length of aft pallet skin stiffener slots incorrect		0.40%	3.2	Gage
102	Relationship of aft pallet skin stiffener slots incorrect		0.40%	3.2	Gage
103	Length from aft pallet skin stiffener slot to remaining pallet skin stiffener slots incorrect		0.40%	3.2	Gage
104	Height to top of pallet skin stiffener slot incorrect		0.40%	3.2	Gage
105	Width between pallet skin sides incorrect		0.40%	3.2	Gage
106	Height to pin stop incorrect		0.40%	3.2	Gage
107	Length to pallet alignment markings, incorrect		0.40%	3.2	Gage
108	Length between pallet alignment markings, incorrect		0.40%	3.2	Gage
109	Pallet skin stiffener slot alignment incorrect		0.40%	3.2	Gage
110	Pallet base loose or missing		0.40%	3.2	Manual-Visual
111	Handle loose or missing		0.40%	3.2	Manual-Visual
112	Pin and lanyard assembly loose or missing		0.40%	3.2	Manual-Visual
113	Lock pin or retaining block loose or missing		0.40%	3.2	Manual-Visual
114	Support pin extractor loose or missing		0.40%	3.2	Manual-Visual
115	Skids loose or missing		0.40%	3.2	Manual-Visual
116	Red flags loose or missing		0.40%	3.2	Manual-Visual
117	Any rivet or screw missing		0.40%	3.2	Manual-Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE		SHEET 2 OF 2		DRAWING NUMBER 9288629
4.4.2.17	Pallet Assembly				NEXT HIGHER ASSEMBLY 9287746
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4B10

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.18	Base, Pallet		9288722
			NEXT HIGHER ASSEMBLY 9288629

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Thickness incorrect		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.19	Skin, Pallet		9288723
			NEXT HIGHER ASSEMBLY 9288629

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total length of skin incorrect		0.40%	3.2	Gage
102	Minimum web height above slots incorrect		0.40%	3.2	Gage
103	Material thickness incorrect		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.20	Stiffener, Pallet Skin		716262
			NEXT HIGHER ASSEMBLY
			9288629

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Height of slot incorrect		0.40%	3.2	Gage
102	Length of slot incorrect		0.40%	3.2	Gage
103	Material thickness incorrect		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.21	Extractor, Pallet Support Pin		716270
			NEXT HIGHER ASSEMBLY 9288629

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length incorrect		0.40%	3.2	Gage
102	Height to angle side incorrect		0.40%	3.2	Gage
103	Angle of side incorrect		0.40%	3.2	Gage
104	Largest height incorrect		0.40%	3.2	Gage
105	Thickness incorrect		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.22	Block, Retaining		9294592
			NEXT HIGHER ASSEMBLY
			9298872

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Total height incorrect		0.40%	3.2	Gage
102	Width incorrect		0.40%	3.2	Gage
103	End radius incorrect		0.40%	3.2	Gage
104	Smallest height incorrect		0.40%	3.2	Gage
105	Length of smallest height incorrect		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.23	Retaining Block and Lanyard Assembly				9298872
					NEXT HIGHER ASSEMBLY
					9288629
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length of loops		0.40%	3.2	Gage
102	Total length of wire rope		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.24	Lock Pin and Lanyard Assembly		9298873
			NEXT HIGHER ASSEMBLY
			9288629

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Length of loops		0.40%	3.2	Gage
102	Total length of wire rope		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: http://assist.dla.mil - Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.25	Pin, Lock				9298874
					NEXT HIGHER ASSEMBLY 9298873
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Wire diameter incorrect		0.40%	3.2	Gage
102	Length of longer leg incorrect		0.40%	3.2	Gage
103	Diameter of loop incorrect		0.40%	3.2	Gage
104	Height of wave incorrect		0.40%	3.2	Gage
105	Angle incorrect		0.40%	3.2	Gage
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

SARPA-QA FORM 2567 FEB 74 4810

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345'(PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.26	Shipping and storage container prior to assembly cover				9256640
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Desiccant missing		0.40%	3.2	Visual
102	Any component missing or damaged		0.40%	3.2	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: https://assist.dla.mil - Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-D-48345 (PA)

PARAGRAPH	TITLE		SHEET 1 OF 1		DRAWING NUMBER
4.4.2.27	Shipping and storage container				9256640
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Relative humidity indicator greater than 20%		0.40%	3.2	Visual
Minor					
201	Hardware damaged		0.65%	3.2	Visual
202	T-bolts insecure		0.65%	3.2	Visual
203	Marking misleading or unidentifiable		0.65%	3.2	Visual
204	Gasket damaged or missing		0.65%	3.2	Visual
205	Evidence of poor workmanship		1.00%	3.12	Visual

NOTES:

Source: http://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.4.3 Testing

4.4.3.1 Salt spray. (See Dwg. 716687; Side Skin, Dwg. 716561; Aft Fairing, Dwg. 716551; Forward Faring, Dwg. 716688; and Bottom Longeron, Dwg. 716560) Major Defect - Coupons of each coating process of the size and number specified in the applicable finish specification shall be submitted for this test.

In addition, four (4) of each of the following parts shall be selected from each lot and subjected to this test. (a) suspension lug, (b) cam, cylinder attaching, and (c) locking spring. The tests shall be performed as specified in 4.5.1. The rejection criteria shall be as specified on the applicable drawing or in the applicable specification.

4.4.3.2 Hardness test of lug, suspension, bomb. (Dwg. MS 3314) Major Defect - A sample of fifty (50) suspension lugs shall be selected from each heat treat batch for this test. The tests shall be performed as specified in 4.5.2, using equipment in accordance with 4.4.4. If any lug fails to comply with one or more of the requirements, as specified on the applicable drawing, the entire heat treat batch of lugs represented shall be rejected.

4.4.3.3 Mechanical properties of lug, suspension, bomb. - (See Dwg. MS 3314) After completion of the tests specified in 4.4.3.2 the following tests shall be performed, using the samples which have successfully passed the criteria of 4.4.3.2.

4.4.3.3.1 Pull test of lug, suspension, bomb. - (See Dwg. MS3314) Major Defect - Twenty-four (24) lugs from the sample shall be subjected to this test. The tests shall be performed as specified in 4.5.3, using equipment in accordance with 4.4.4. If any lug fails to comply with one or more of the requirements as specified on the applicable drawing the entire batch represented by the sample shall be rejected.

4.4.3.3.2 Impact test of lug, suspension, bomb - (See Dwg. MS 3314) Major Defect - Fourteen (14) lugs from the sample shall be subjected to this test. The test shall be performed as specified in 4.5.4, using equipment in accordance with 4.4.4. If any lug fails to comply with one or more of the applicable requirements, as specified on the drawing, the entire batch represented by the sample, shall be rejected.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.4.3.3.3 Deflection test of lug, suspension, bomb - (See Dwg. MS 3314) Major Defect - Twelve (12) lugs from the sample shall be subjected to this test. The test shall be performed as specified in 4.5.14, using equipment in accordance with 4.4.4. If any lug fails to comply with one or more of the applicable requirements, as specified on the drawing, the entire batch represented by the sample shall be rejected.

4.4.3.4 Reduced sampling for mechanical properties of lug, suspension bomb. - After ten (10) consecutive batches of suspension lugs have successfully met the criteria of 4.4.3.3, the following reduced sampling plans shall be employed, using lugs which have successfully passed the criteria of 4.4.3.2.

4.4.3.4.1 Pull test of lug, suspension, bomb. - Ten (10) lugs from the sample shall be subjected to the tests. Acceptance shall be as specified in 4.4.3.3.1.

4.4.3.4.2 Impact test of lug, suspension, bomb. - Five (5) lugs from the sample shall be subjected to the tests and acceptance shall be as specified in 4.4.3.3.2.

4.4.3.4.3 Deflection test of lug, suspension, bomb. - Five (5) lugs from the sample shall be subjected to the test and acceptance shall be as specified in 4.4.3.3.3.

4.4.3.4.4 If a batch is rejected while on reduced sampling, the contractor may continue testing, using the reduced sampling plans for the next three (3) consecutive lots. If all three (3) consecutive lots meet the acceptance criteria, then the reduced sampling plan may remain in effect, however,if any of the three (3) consecutive lots are rejected, the contractor shall revert back to the sampling plans specified in 4.4.3.3.

4.4.3.5 Magnetic particle inspection of lug, suspension, bomb. (See Dwg. MS 3314) Critical Defect - Each suspension lug shall be subjected to this test. The test shall be performed as specified in 4.5.5. If any suspension lug fails to comply with the applicable drawing requirement, it shall be classed defective and removed from the lot.

4.4.3.6 Intervalometer electrical. (See 3.3.1) Major Defect - Each intervalometer shall be subjected to this test. The tests shall be performed as specified in 4.5.6, using equipment in accordance witn 4.4.4. If any intervalometer fails to comply with the applicable requirements, it shall be classified defective and removed from the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.4.3.7 Dispenser electrical, prior to connector mating. (See 3.3.2) Major Defect - Each dispenser shall be subjected to this test. The tests shall be performed as specified in 4.5.7, using equipment in accordance with 4.4.4. If any dispenser fails to comply with the applicable requirements, it shall be classified defective and removed from the lot.

4.4.3.8 Dispenser electrical, after connector mating. (See 3.4) Major Defect - Each dispenser shall be subjected to this test as specified in 4.5.8, using equipment in accordance with 4.4.4. If any dispenser fails to comply with the applicable requirements, it shall be classified defective and removed from the lot.

4.4.3.9 Cylinder attachment and terminal location check. (See Dwg. 716547) Major Defect -

a. Check all forty (40) mountings until two-hundred forty (240) mountings of six (6) consecutive assemblies are found acceptable, then -

b. Check four (4) mountings per assembly so that each mounting is checked once every ten (10) assemblies.

c. When a mounting is rejected, check all forty (40) mountings in the preceding assemblies until two (2) consecutive assemblies are found acceptable and check all forty (40) mountings in the succeeding assemblies until four (4) consecutive assemblies are found acceptable, then -

d. Repeat steps b and c.

The test shall be performed as specified in 4.5.9, using equipment in accordance with 4.4.4.

4.4.3.10 Location of cylinder mounting holes in body assembly (See Dwgs. 716547 and 716562). Major Defect -

a. Check all mounting holes until ten (10) consecutive assemblies are found acceptable, then -

b. Check one(1) five (5) hole pattern in each of the two (2) compartments so that each five hole pattern is checked once every six (6) assemblies.

c. When an assembly is rejected, check all mounting holes in the preceding assemblies until four (4) consecutive assemblies are found acceptable and check all mounting holes in the succeeding assemblies until six (6) consecutive assemblies are found acceptable, then -

d. Repeat steps b and c.

The test shall be performed as specified in 4.5.10, using equipment as specified in 4.4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.4.3.11 Pull test of retaining block and lanyard assembly. - (See Dwg. 9298872) Major defect - Each retaining block and lanyard assembly shall be subjected to this test as specified in 4.5.11. If any assembly fails to comply with the applicable requirements it shall be classed defective and removed from the lot.

4.4.3.12 Pull test of lock pin and lanyard assembly. - (See Dwg. 9298873) Major defect - Each lock pin and lanyard assembly shall be subjected to this test as specified in 4.5.12. If any assembly fails to comply with the applicable requirements, it shall be classed defective and removed from the lot.

4.4.3.13 Pressure test of loaded shipping container. - (See Dwg. 9256640) - Major Defect - Each loaded container shall be subjected to this test. This test shall be performed as specified in 4.5.13, using equipment in accordance with 4.4.4. If any assembly fails to comply with the applicable requirements, it shall be classified defective and removed from the lot.

4.4.3.14 Improper soldering. - Major Defect - Each printed wiring assembly and intervalometer assembly shall be inspected for improper soldering in accordance with 3.7. If any printed wiring or intervalometer assembly fails to comply with the requirements in 3.7, it shall be classified defective and removed from the lot.

4.4.4 Inspection Equipment. - The inspection equipment required to perform the inspections and tests prescribed in this specification is identified in the 'Paragraph Reference/Inspection Method' column in the tables starting with paragraph 4.4.2.1, and the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See Section 6 of MIL-A-48078, and 6.2 herein.

4.5 Test methods and procedures.

4.5.1 Salt spray. - The required parts and coupons shall be tested in accordance with their respective detail specification. The suspension lugs shall be tested in accordance with FED-STD-151, Method 811.1 and with the requirements specified in the applicable drawings. (Destructive Test)

4.5.2 Hardness. - The samples shall be tested for hardness in accordance with Standard FED-STD-151. This is a non-destructive test, parts so tested may be returned to the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.5.3 Pull test of lug, suspension, bomb. - One half the quantity of lugs selected for this test shall be assembled to a fixture and pulled in direction W in accordance with Note A of Figure 1. The remaining half of the lugs shall be assembled to a fixture and pulled in direction X, in accordance with Note B of Figure 1. (Destructive) Parts so tested may not be returned to the lot.

4.5.4 Impact test of suspension lug. - The lug shall be tested in accordance with FED-STD-151, Method 221.1 with the contact surface and load as specified in Note D on Figure 1. (Destructive) Parts so tested may not be returned to the lot.

4.5.5 Magnetic particle inspection of lug, suspension, bomb. - The suspension lug shall be tested in accordance with specification MIL-I-6868. (Non-destructive) Parts so tested may be returned to the lot.

4.5.6 Intervalometer electrical. - Each intervalometer shall be subjected to the following tests:

a. Test each firing circuit for circuit resistance, shorts, continuity and sequence.
b. Proper operation of notch homing deck at position 40.
c. Sequence of the aircraft indicating lights.

The tests shall be made using equipment as specified on drawings 9202445 and 9202446. (Non-destructive) Parts so tested may be returned to the lot.

4.5.7 Dispenser electrical, prior to connector mating. - Each dispenser shall be subjected to the following tests:

a. Test the mounted harness assembly for circuit resistance, shorts, continuity and sequence.
b. Test the mounted intervalometer for overall timing at the shortest time setting.

(The tests shall be made using equipment specified on drawings 9202447 and 9202448 (Non-Destructive) Parts so tested may be returned to the lot).

4.5.8 Dispenser electrical, after connector mating. - Each dispenser shall be subjected to this test as specified on drawings 9202443 and 9202444. (Non-Destructive) Parts so tested may be returned to the lot.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

4.5.9 Cylinder attachment and terminal location check. - The equipment as specified in 4.4.4 shall be inserted into the mounting holes. (Non-destructive) Parts so tested may be returned to the lot.

4.5.10 Location of cylinder mounting holes. - Equipment as specified in 4.4.4 shall be inserted in the body assembly. (Non-destructive) Parts so tested may be returned to the lot.

4.5.11 Pull test of retainer block lanyard. - The retainer block and lanyard assembly shall be secured in an approved test fixture and the force shall be applied in the direction and at the rate specified in Dwg. 9298872. (Non-destructive) Parts so tested may be returned to the lot.

4.5.12 Pull test of lock pin lanyard. - The lock pin and lanyard shall be secured in an approved test fixture and the force shall be applied in the direction and rate specified in Dwg. 9298873. (Non-destructive) Parts so tested may be returned to the lot.


4.5.13 Pressure retention test of loaded shipping container. - A fixture shall be assembled to the loaded container. The container shall be filled with dry air and the pressure loss shall not exceed the requirements as specified on the applicable drawing.

4.5.14 Deflection test of suspension lugs. - The lug shall be assembled to a fixture, and shall be tested in direction Y in accordance with Note C on Figure 1. (Destructive) Parts so tested may not be returned to the lot.


4.5.15 Helicopter vibration test, cargo security. (See 3.9) Two loaded dispensers from each lot shall be subjected to this test as specified. Any evidence of cargo separation or disengagement of any locking springs from the cylinder assembly shall be cause for lot rejection. The dispensers shall then be electrically checked with government furnished equipment, A/E 24T-79 test set (Non-destructive). Acceptable resistance shall be 0.5 to 3.25 ohms.

4.5.16 Static firing. - (See 3.10) - This test shall be performed during first article testing only on two (2) dispensers at a Government-owned facility. The cargo for this test shall be loaded at the Government-owned installation specified by the Contracting Officer. The dispenser shall then be attached to a suitable fixture for the functioning of all forty firing positions (Non-destructive).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

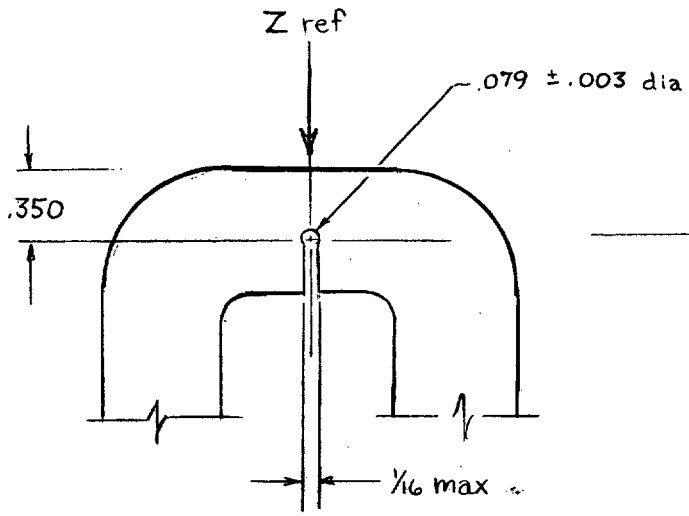

Detail - Impact Notch

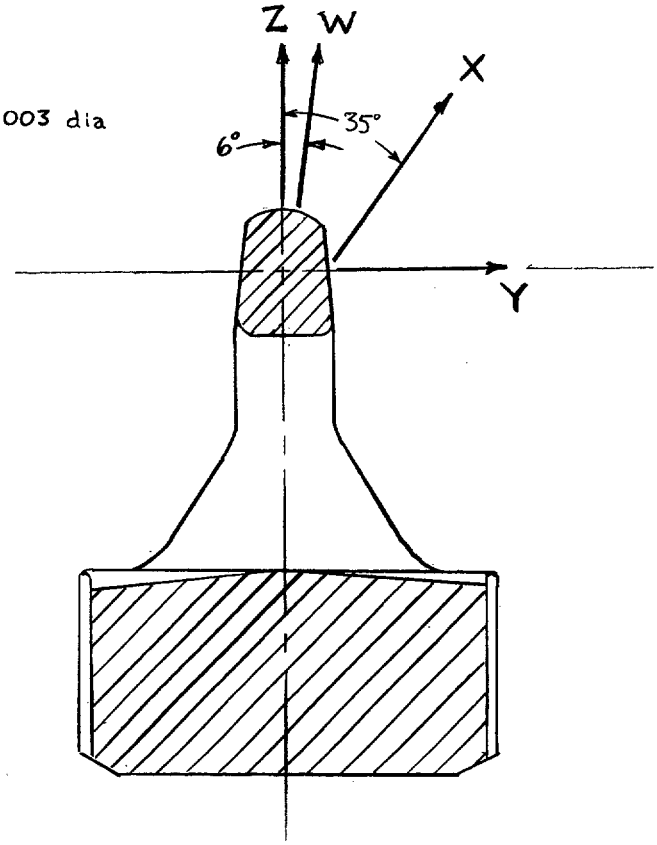

Section View of Stress Orientation

NOTES:

A. Each sample shall be capable of withstanding a load of 27,000 lbs in direction W without permanent deformation & a load of 35,000 lbs in the same direction without rupture.
B. Each sample shall be capable of withstanding a load in direction X of 18,000 lbs without permanent deformation & a load of 24,000 lbs in the same direction without rupture.
C. Each sample shall be capable of .10 deflection measured at the center of the crossbar in direction Y without rupture. The load shall be applied in direction Y.
D. Each sample, notched as shown (at -65°F) shall accept an impact load of 200 ft-lbs applied in direction Z (the striker utilized will have a flat contact surface 1/4 dia & a min hardness of RC 60) without failure.
E. Reference drawing MS 3314.

FIGURE 1 Mechanical Properties of Bomb Suspension Lug (1000 Lbs. Class)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging.

5.1.1 Level C. - The Dispenser, Bomb SUU-13-D/A shall be preserved and packaged in accordance with Dwg. 9256640.

5.2 Packing

5.3 Marking. - Marking of the container shall be in accordance with Dwg. 9256640.

6. NOTES

6.1 Ordering Data. - Procurement documents shall specify the following:

a. Title, number and date of this specification.
b. Provisions for submission of first article samples.
c. Provisions of MIL-A-48078.

6.2 Submission of inspection equipment designs for approval. - (See MIL-A-48078). Submit equipment designs as required, to Commander: Picatinny Arsenal, ATTN: SARPA-QA-T-T, Dover, New Jersey 07801.

6.3 Distribution of ammunition data cards. - Distribution of data cards shall include the following: Commander, Picatinny Arsenal, ATTN: SARPA-QA-A-M Dover, New Jersey 07801.

Custodian:
Army-PA

Preparing Activity:
Army-PA

Project Number: 1345-A-172

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-D-48345 (PA)

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 68 WHICH MAY BE USED

Source: https://assist.dla.mil - Downloaded: 2026-10-26T03:35Z
Check the source to verify that this is the current version before use.

5/5

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

COMMANDER
Picatinny Arsenal
ATTN: SARPA-QA-A
Dover, New Jersey 07801

FOLD

80

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T03:55Z
Check the source to verify that this is the current version before use.